
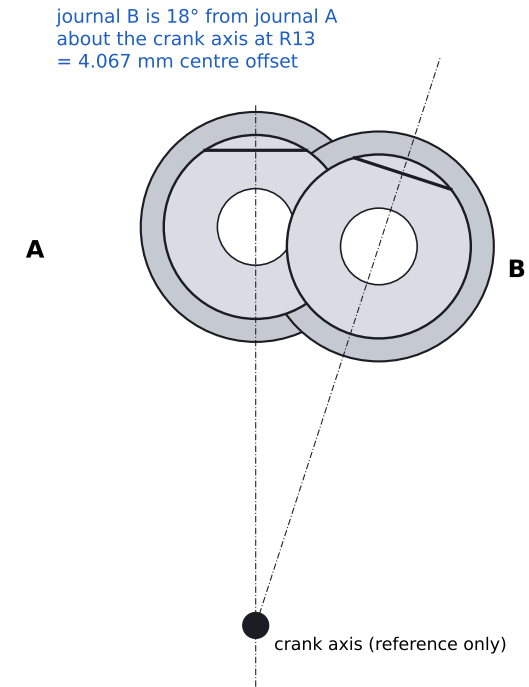


M01 Split crankpin

Material: Stainless 303 / 416 (or 1144 steel, black oxide) Qty: 5 per engine / 250 for 50 units Units: mm V10 display engine (original design)

SIDE VIEW (end A = front journal)

END VIEW from end A

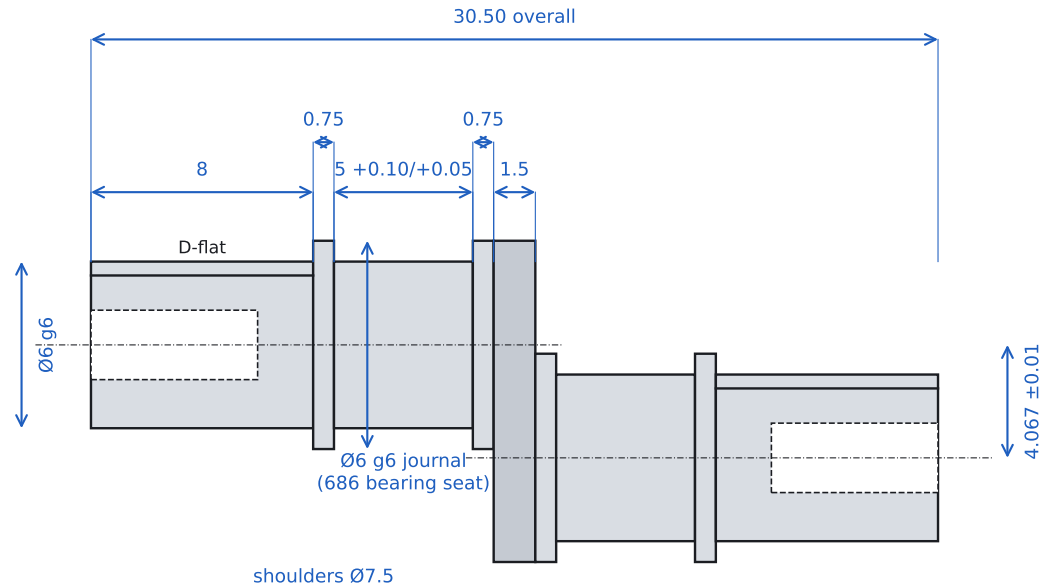


- Both journals $\varnothing 6$ g6 (-0.004/-0.012), Ra 0.4 or better - they carry the 686 bearing inner rings.
- Journal centre offset 4.067 ± 0.01 at 18° about the crank axis (R13). All other dims ± 0.05 .
- D-flats 0.5 deep, each facing radially AWAY from the crank axis (see end view). Flats key the pin into the printed webs.
- Both ends tapped M3 x 6 deep (tap drill $\varnothing 2.5$). Break all edges 0.2. Shoulder faces square to axis within 0.02.
- Journal B side mirrors journal A (same lengths). The side view is drawn in the plane of the offset.


M02 Main shaft (front and rear identical)

Material: Stainless 303 (or 1045, black oxide) Qty: 2 per engine / 100 for 50 units Units: mm V10 display engine (original design)

SIDE VIEW

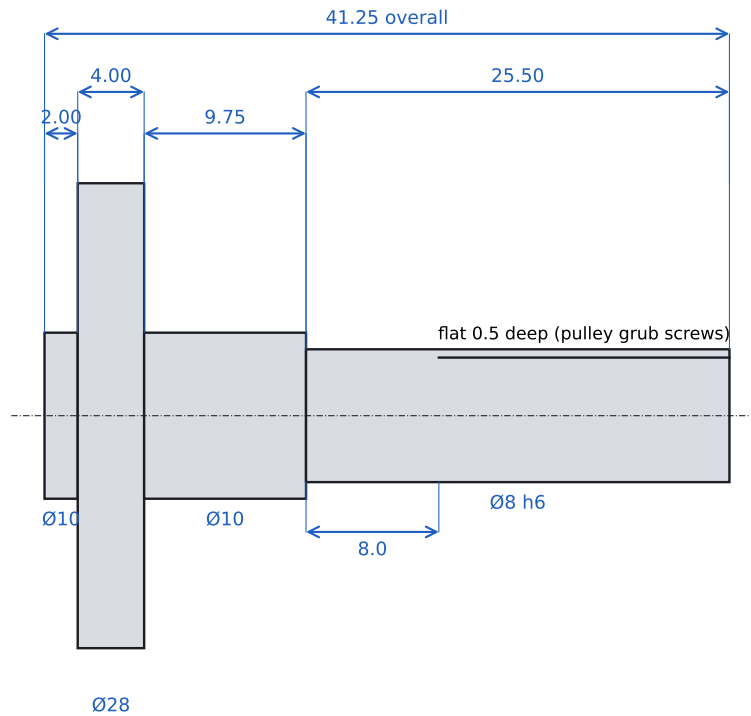


FLANGE END VIEW

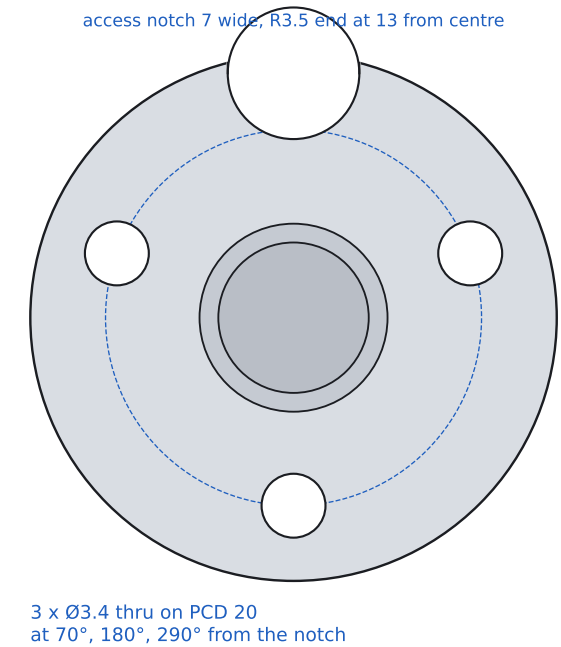

- $\varnothing 8$ journal h6 (0/-0.009) for the 608 bearing; Ra 0.8. Shoulder face square to axis within 0.02 (it locates the bearing inner ring).
- Flange face square to axis within 0.02; spigot $\varnothing 10$ -0.02/-0.05 (locates in the printed end web). Other dims ± 0.05 .
- Flange holes are clearance holes; the UNEVEN bolt pattern (110/110/140° spacing) plus the notch makes the shaft fit the web one way only.
- The flat is only needed on the FRONT shaft (drive pulley). Machining it on both keeps one part number.
- Alternative if machining capacity is short: 8 mm h6 ground rod + commercial 8 mm rigid flange coupling (lower precision; not recommended for production).

M03 Piston guide rail

Material: 3 mm ground stainless rod (h6) Qty: 10 per engine / 500 for 50 units


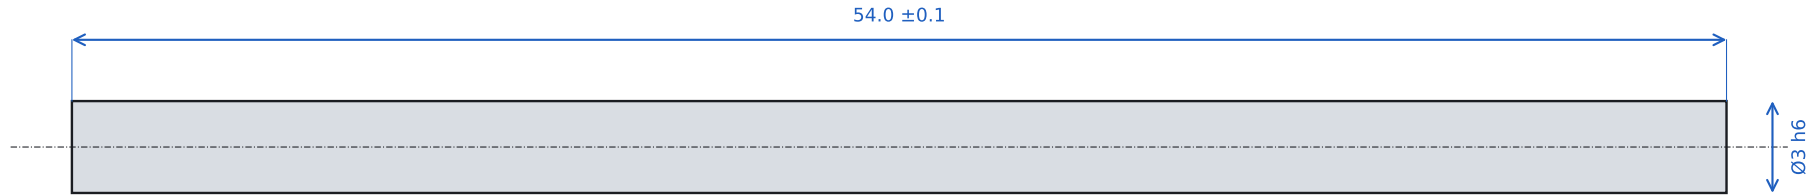


- Cut from 3 mm h6 ground stainless linear rod (not drill rod - needs corrosion resistance and a polished surface).
- Both ends: $0.3 \times 45^\circ$ chamfer, deburred so they do not scratch the bronze bushings. Length ± 0.1 .
- The rail is the ONLY thing the piston slides on (two oil-impregnated bronze bushings). Keep it clean; one drop of light oil at assembly.

M04 Pulley spacer

Material: stainless 303 Qty: 1 per engine / 50 for 50 units

SECTION

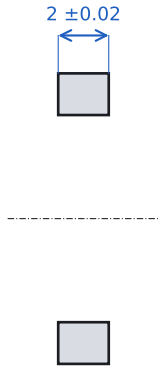

OD 11.5 -0.1 (must stay inside the 608 inner ring) ID 8.2 +0.05

- Sits on the front main shaft between the 608 inner ring and the 60T pulley hub; clamps the crank's axial position.
- Faces flat and parallel within 0.02. Break edges 0.2. Can be parted off Ø12 bar in the same set-up as M02.