PLAN (lid closed; dashed: lid at the open stop)

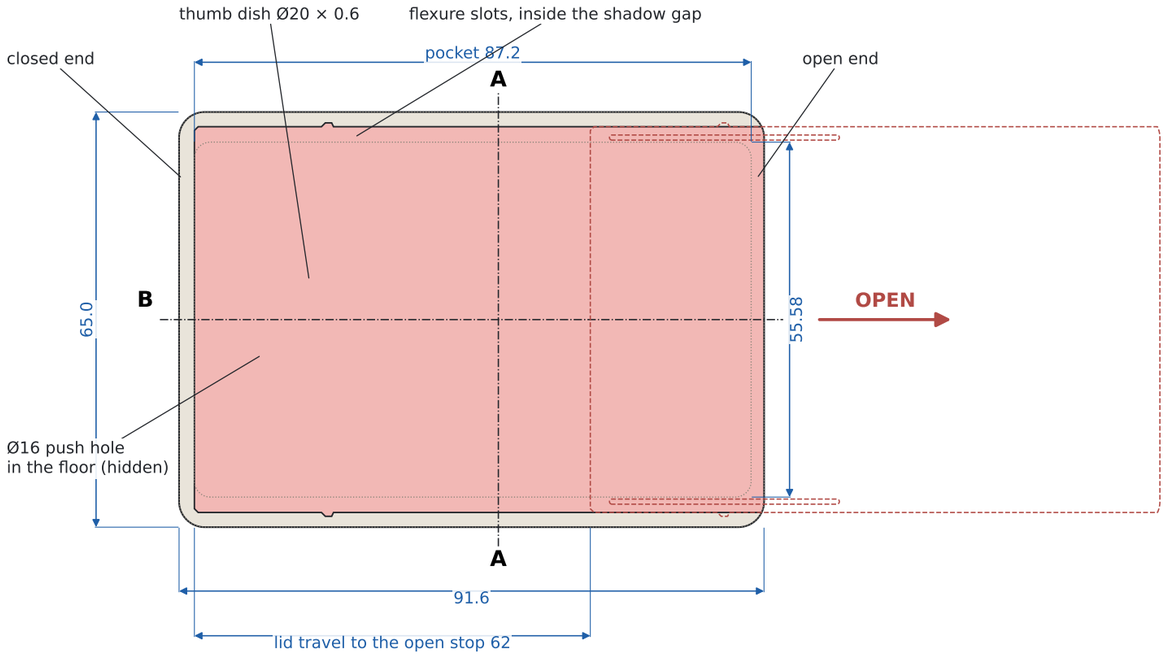


SECTION A–A (x = 50), with card

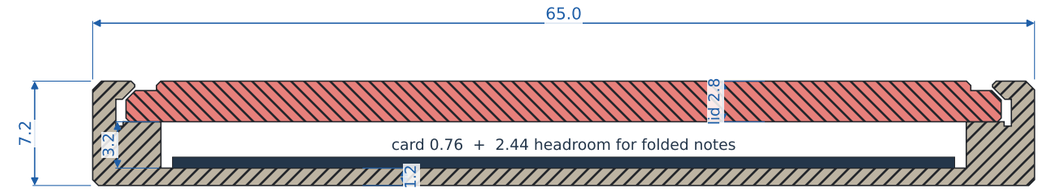


SECTION B–B (y = 0), lid closed

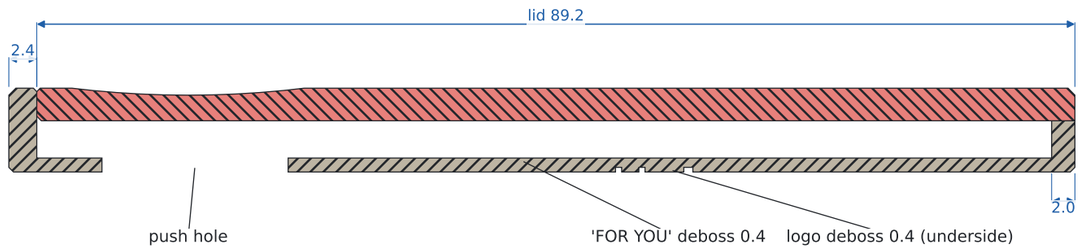


DETAIL C: lid edge in the tray groove, at the parked detent bump (x = 23.4). Scale 10:1

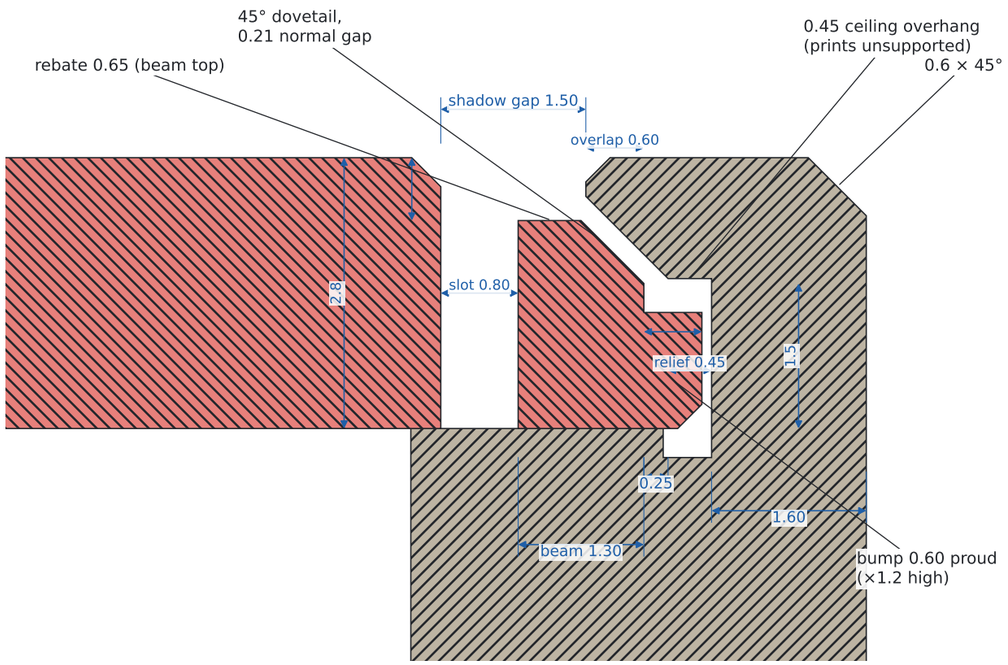


## KEY DATA

| | |
|---|---|
| Parts | Tray + Lid (2), no hardware, no glue |
| Outside size | 91.6 × 65.0 × 7.2 mm |
| Holds | ID-1 card 85.6 × 53.98 × 0.76 + notes folded in quarters |
| Pocket | 87.2 × 55.58 × 3.2 mm |
| Lid travel | 62 mm to a firm stop; card 72 % uncovered |
| Fit, per side | 0.25 lateral, 0.21 normal on the 45° dovetail |
| Detent beam | 36 × 1.3 mm fixed-fixed, k ≈ 4.1 N/mm |
| Opening click | ≈ 3.6 N (model; 2.0–5.7 N over print variation) |
| Closing click | ≈ 2.9 N |
| Open stop | ≈ 12 N to pull the lid off (6–19 N) |
| Fitting the lid | ≈ 2.3 N snap-in |
| Beam strain | 0.45 % nominal, ≤ 0.71 % worst case |
| Lid variants | Standard · Loose (−0.10/side) · Snug (+0.10/side) |
| Print | both parts flat, no supports, 0.20 mm layers |

Units: mm. Generated from gs/params.py (all outlines are slices of the generated solids). Views 1:1 unless marked. General tolerance ±0.2 mm, as printed (0.4 mm nozzle, 0.20 mm layers, PLA). CAD-validated only: not yet printed or tested.