PLAN (lid closed; dashed: lid at the open stop)

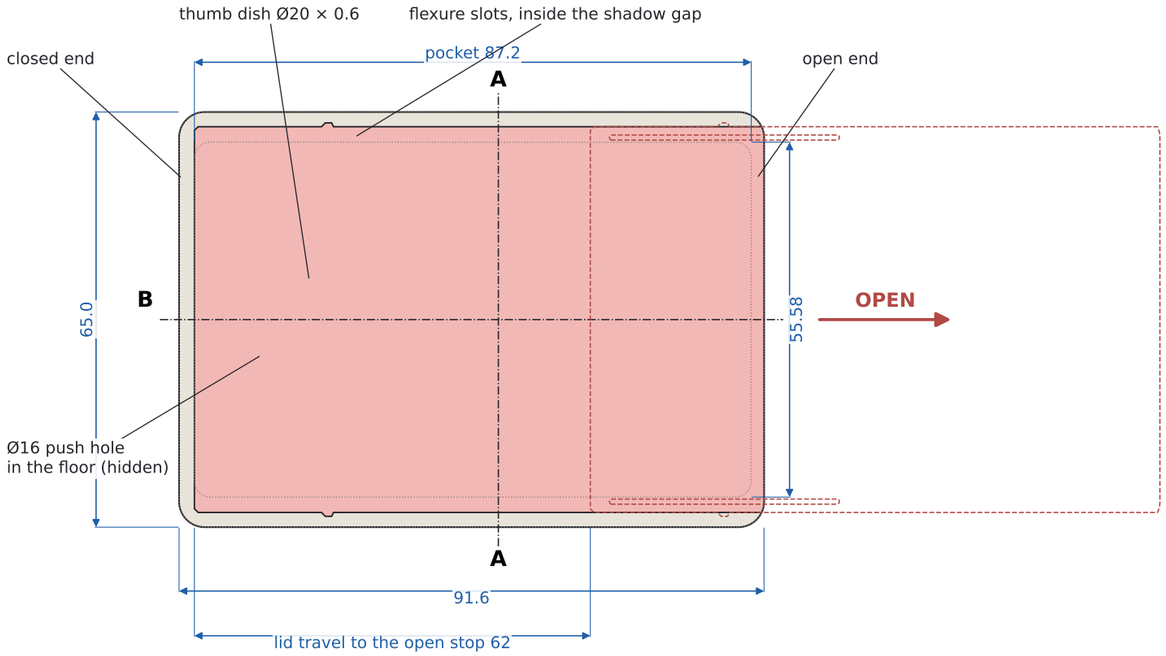

SECTION A–A (x = 50), with card

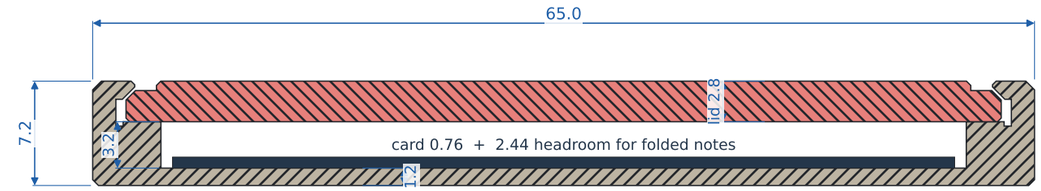

SECTION B–B (y = 0), lid closed

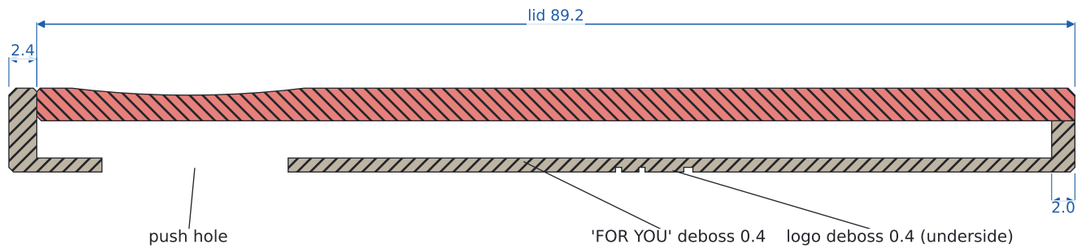

DETAIL C: lid edge in the tray groove, at the parked detent bump (x = 23.4). Scale 10:1

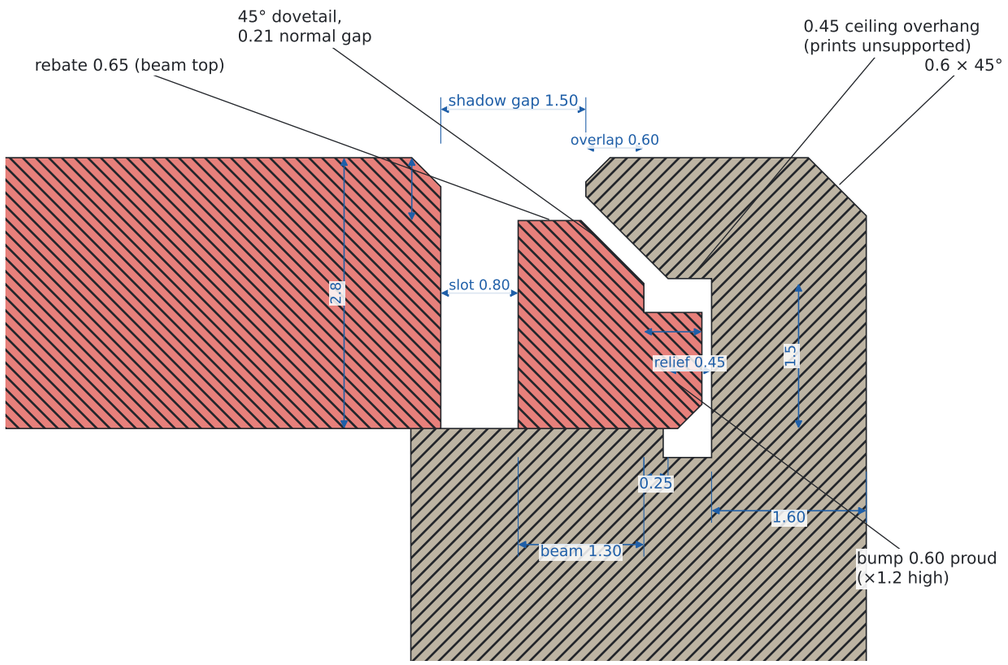

KEY DATA

Parts	Tray + Lid (2), no hardware, no glue
Outside size	91.6 × 65.0 × 7.2 mm
Holds	ID-1 card 85.6 × 53.98 × 0.76 + notes folded in quarters
Pocket	87.2 × 55.58 × 3.2 mm
Lid travel	62 mm to a firm stop; card 72 % uncovered
Fit, per side	0.25 lateral, 0.21 normal on the 45° dovetail
Detent beam	36 × 1.3 mm fixed-fixed, k ≈ 4.1 N/mm
Opening click	≈ 3.6 N (model; 2.0–5.7 N over print variation)
Closing click	≈ 2.9 N
Open stop	≈ 12 N to pull the lid off (6–19 N)
Fitting the lid	≈ 2.3 N snap-in
Beam strain	0.45 % nominal, ≤ 0.71 % worst case
Lid variants	Standard · Loose (−0.10/side) · Snug (+0.10/side)
Print	both parts flat, no supports, 0.20 mm layers

Units: mm. Generated from gs/params.py (all outlines are slices of the generated solids). Views 1:1 unless marked. General tolerance ±0.2 mm, as printed (0.4 mm nozzle, 0.20 mm layers, PLA). CAD-validated only: not yet printed or tested.