

VLAN & VTP

Course Code: COE 3206

Course Title: Computer Networks



Dept. of Computer Science
Faculty of Science and Technology

Lecturer No:	9	Week No:		Semester:	Fall 25-26
Assistant Professor:	Dr. Rajarshi Roy Chowdhury (rajarshi@aiub.edu)				

Lecture Outline

1. What is VLAN?
2. Advantages of VLAN
3. Trunk Port
4. Router on stick
5. What is VTP
6. VTP Benefits
7. VTP Modes of Operation


Virtual LANs (VLANs)



Flat Network: A flat network is a computer network design approach that aims to reduce cost, maintenance and administration. It reduces the number of routers and switches on the network. Instead of connecting to separate switches it encourages to use a single switch. It avoids the hierarchical design. Flat network is not segmented or separated into different broadcast areas by using routers. For connecting devices instead of using routers it uses hub and switches.

Problems of Flat network:

- i) Single broadcast domain
- ii) Slow down network performance
- iii) Security issue

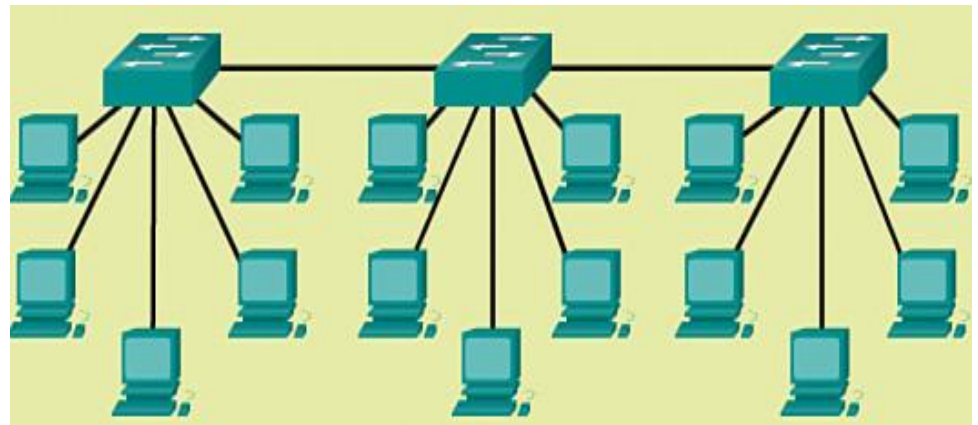


One large broadcast domain


Virtual LANs (VLANs)



- A VLAN acts like a physical LAN, but it allows hosts to be grouped together in the same broadcast domain even if they are not connected to the same switch.
- VLANs allow you to break up switched environments into multiple broadcast domains. Here is the basic summary of a VLAN:
- A VLAN = A Broadcast Domain = An IP Subnet

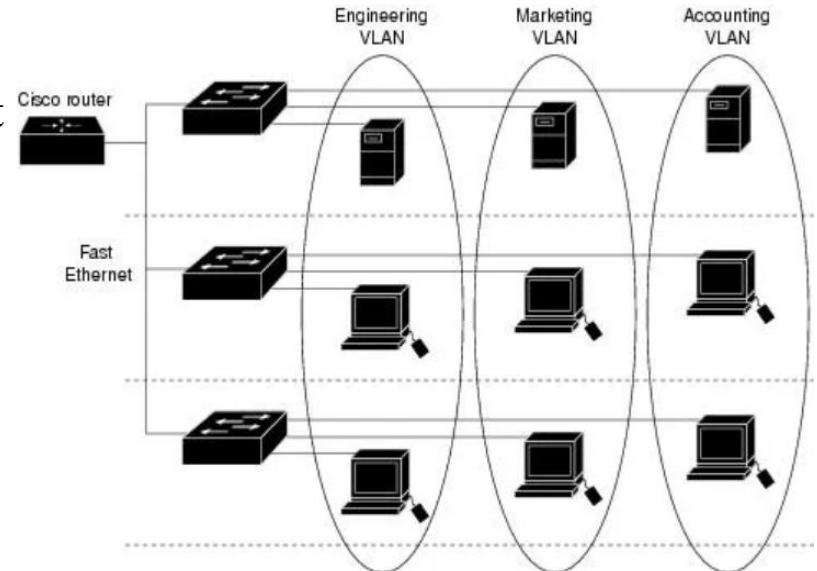

Virtual LANs (VLANs)

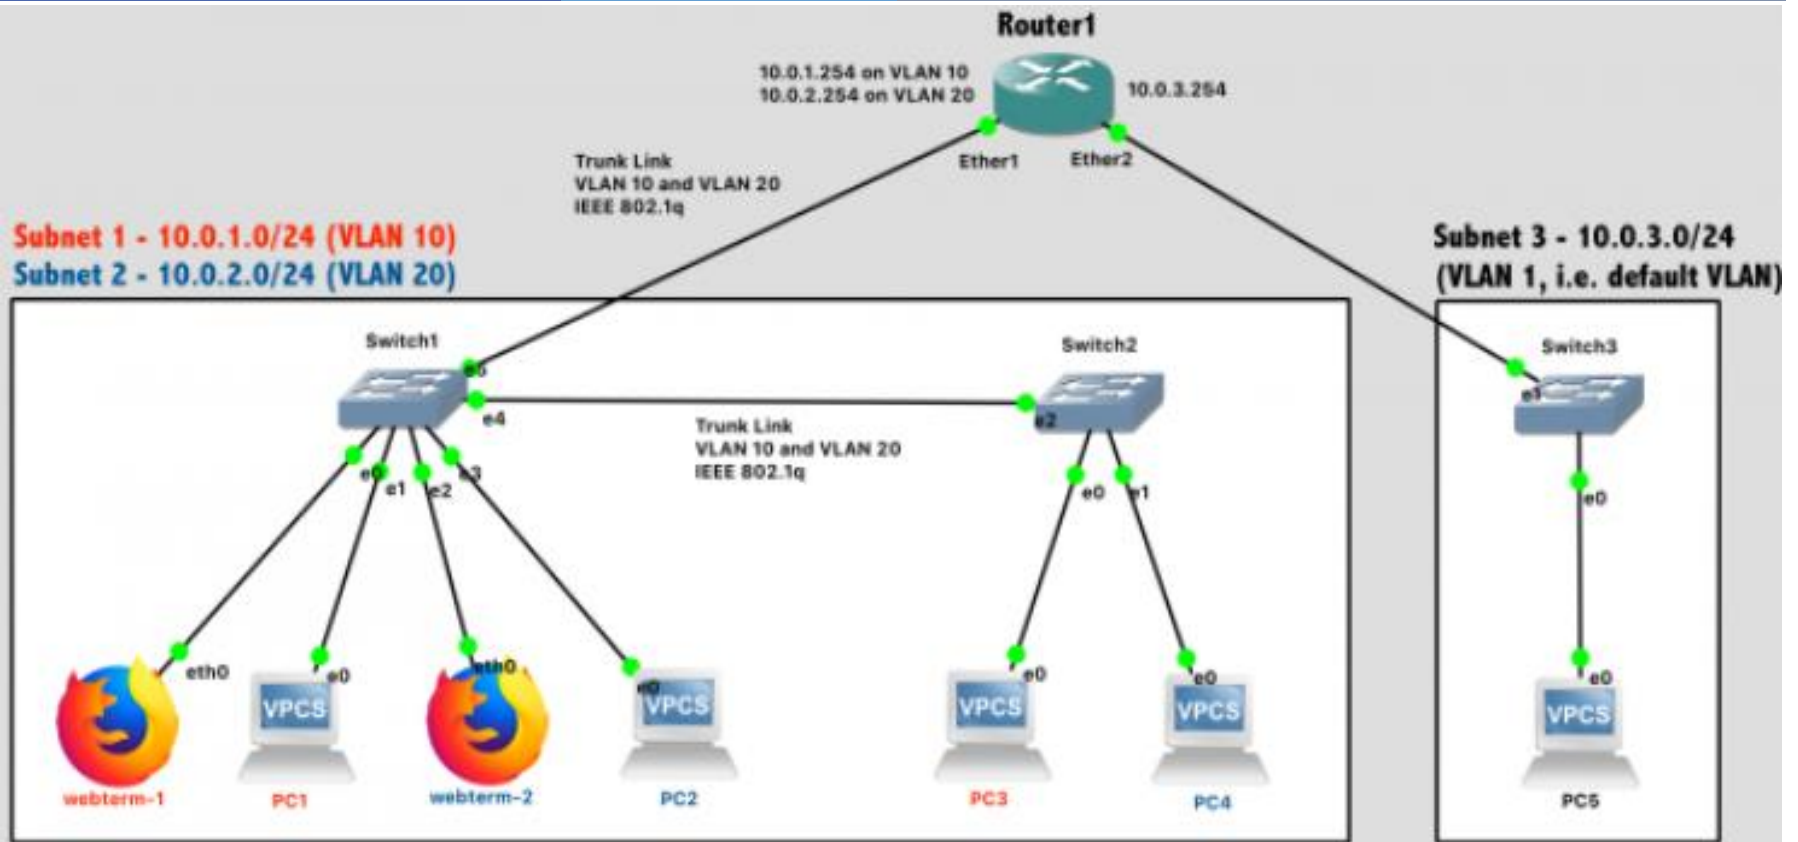

Advantages of VLAN



- Performance
- Security
- Cost
- Location
- Management

Advantages of VLAN (cont.)



Performance:

- A **single switch** without VLAN has got **one broadcast domain**.
- If the number of switches adds to that network the broadcast domain will become bigger, but it will not split up. More devices make the traffic intense.
- With the **problem in a single port of any switch it will create disturbance** in the **whole network**, as the switches have same broadcast domain. This decreases the network performance.
- On the other hand, **VLAN split-ups broadcast domain. One VLAN means one broadcast domain. It will help to improve network performance.**



Advantages of VLAN (cont.)

Security:

- VLAN enhances security by dividing a large domain in small collision domains.
- A malicious user can't get connected very easily in a VLAN because it is more manageable for the system admin, as it will have a limited switch ports.

Cost:

- Router helps to differentiate between the networks, but router is expensive.
- VLAN helps to decrease the dependency on router to some extent. It helps to create virtual local area, which definitely reduce the cost.

Advantages of VLAN (cont.)

Location:


VLAN has the ability to add (required/wanted) users to a VLAN regardless of their physical location.

Management:

A **single port** configuration can assign a new student or a new employee in VLAN. It is easily manageable.



Two types of VLAN connection links:

- Access link
- Trunk link

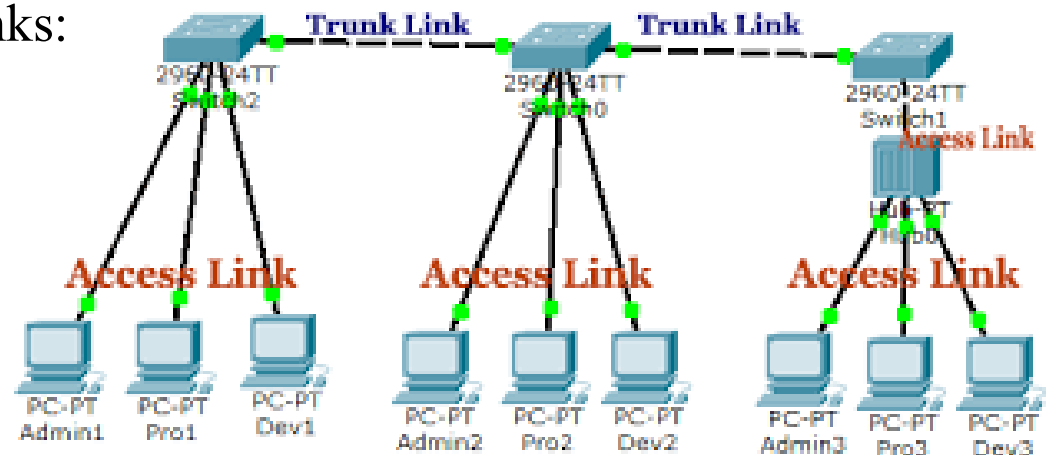

Trunk Port

- Connection between the **switches** **must carry traffic for multiple VLANs**. This type of port is known as a **trunk port**.
- **Trunk ports** are often called **tagged ports** because the **switches send frames between each other with a VLAN "tag" in place**.
- VLANs are not a Cisco-only technology. Just about all **managed switch vendors** support VLANs.

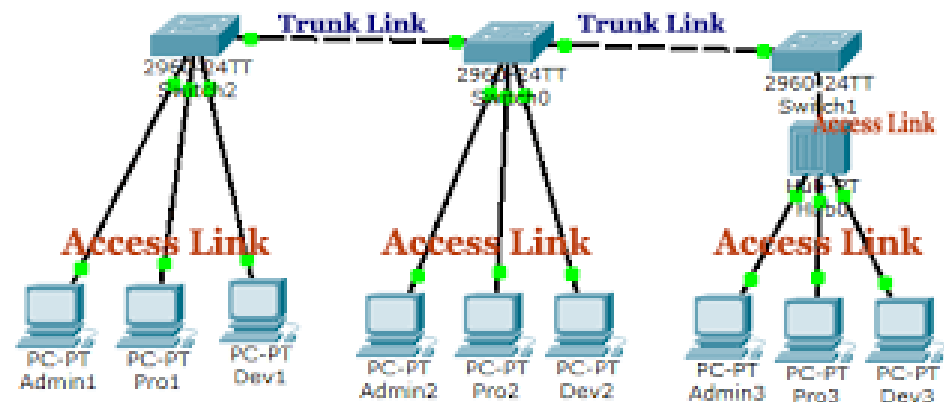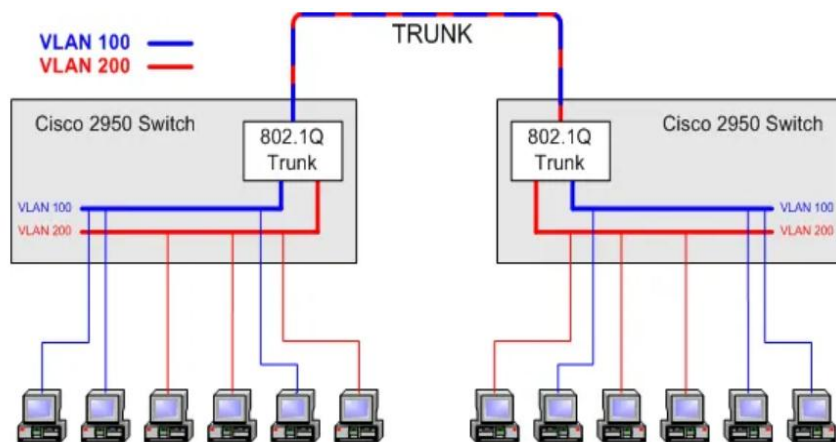



Trunk Port (cont....)

- For VLANs to operate in a **mixed-vendor environment**, a common trunking or "tagging" language must exist between them. This language is known as **802.1Q** (Industry standard).
- **All vendors design their switches** to recognize and understand the **802.1Q tag**, which is what allows us to trunk between switches in any environment.
- **IEEE 802.1Q** uses an internal tagging mechanism. The trunking device inserts a **4-byte tag** in order to identify the VLAN to which a frame belongs and then re-computes the **frame check sequence (FCS)**.

Trunking



- VLANs are **local to each switch's database**, and **VLAN information is not passed between switches**.
- **Trunk links** provide VLAN identification for frames traveling between switches.
- Cisco switches **have two Ethernet trunking mechanisms**: ISL and IEEE 802.1Q.
- **Certain types of switches can negotiate trunk links.**
- **Trunk links carry traffic from all VLANs to and from the switch by default but can be configured to carry only specified VLAN traffic.**
- Trunk links must be configured to allow trunking on each end of the link.

Purpose:

For managing all **configured VLANs** across a switch internetwork & maintain consistency

- **Allows an administrator to add, delete, & rename VLANs**




Router on a stick

Router-on-a-stick is a type of router configuration in which a single physical interface manages traffic between multiple VLANs on a network.

The router receives VLAN tagged traffic on the **trunk interface** from the nearby switch (SW1), and forwards the routed traffic out to VLAN tagged destination using the same interface

Traditional Inter-VLAN Routing

- The router has one physical port for each VLAN.
- Each port has an IP address on its own VLAN.
- Routing is the same as routing between any subnets.

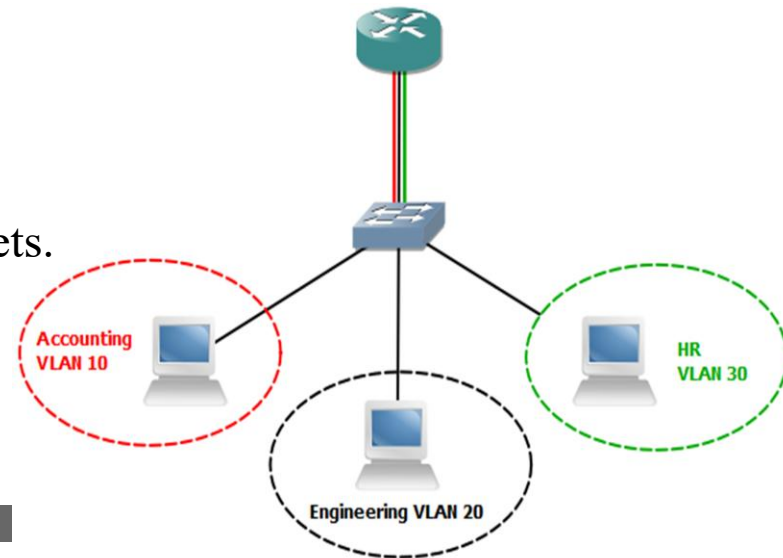




VTP (VLAN Trunking Protocol)

VTP (VLAN Trunking Protocol) is a **Layer 2** Protocol developed by **Cisco**. It allows to **control, create and delete VLANs** from a central **VTP Server**.

VTP helps us to configure VLANs in one **VTP Server** and then generate/transfer this information to other switches. With this synchronization mechanism, other switches in the VTP domain can be created and updated.

There are **different VTP modes** used in this mechanism.

- Server Mode
- Client Mode
- Transparent Mode

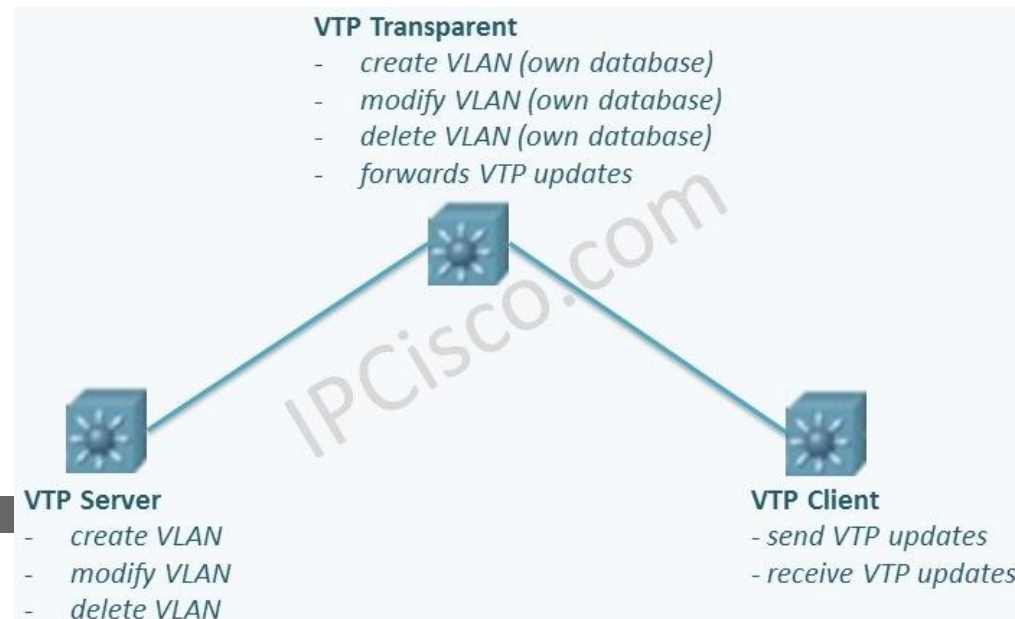




VTP Modes of Operation

❖ Server

- create, modify, and delete VLANs
- VTP version and VTP pruning, for the entire VTP domain links
- VTP server is the default mode.

❖ Client

- **Cannot** create, change, or delete VLANs on a VTP client.
- Receives information + sends/receives updates

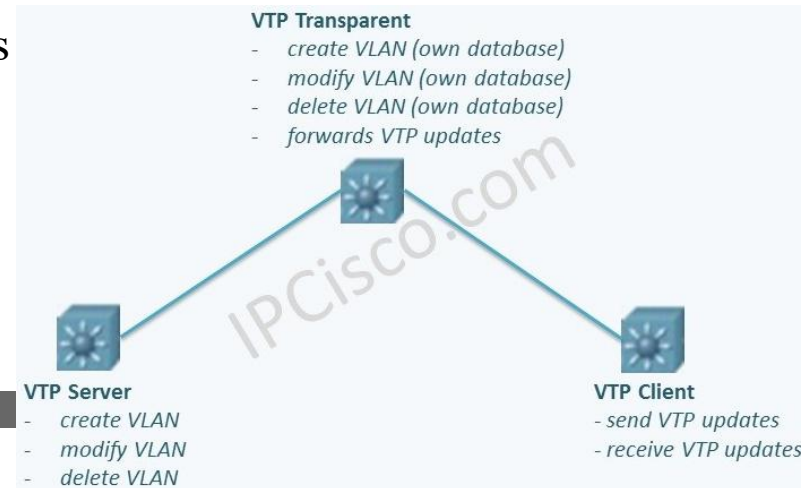


VTP Modes of Operation (cont...)



❖ Transparent

- A **VTP transparent switch does not advertise** its VLAN configuration
- **Receives information + sends/receives updates**
- Transparent switches do forward VTP advertisements that they receive out their trunk ports in VTP **v2**, even though they **don't participate** in the VLAN database updates themselves.

VTP Modes of Operation (cont...)

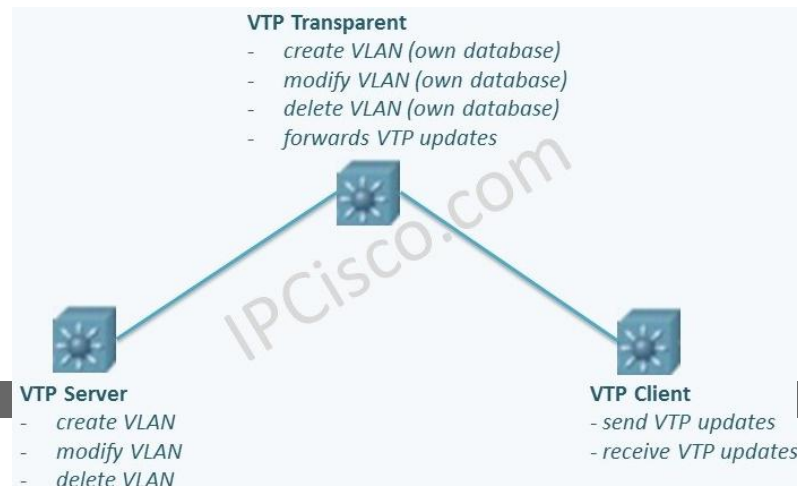



References

1. **Data Communications and Networking**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2007, USA.
2. <https://www.geeksforgeeks.org/basics-computer-networking/>
3. https://www.tutorialspoint.com/computer_fundamentals/computer_networking.htm



Books

1. **Data Communications and Networking**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2007, USA.
2. **Computer Networking: A Top-Down Approach**, *J. F., Kurose, K. W. Ross*, Pearson Education, Inc., Sixth Edition, USA.
3. **Official Cert Guide CCNA 200-301 , vol. 1**, *W. Odom*, Cisco Press, First Edition, 2019, USA.
4. **CCNA Routing and Switching**, *T. Lammle*, John Wiley & Sons, Second Edition, 2016, USA.
5. **TCP/IP Protocol Suite**, *B. A. Forouzan*, McGraw-Hill, Inc., Fourth Edition, 2009, USA.
6. **Data and Computer Communication**, *W. Stallings*, Pearson Education, Inc., 10th Edition, 2013, USA.