



(a) tie robust to calibration error at eval-F
(crossover $m^* = \text{none}$; all CIs include 0)

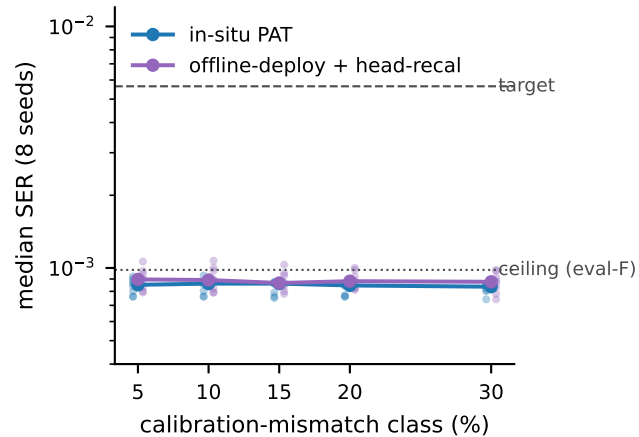

(b) common-mode drift:
re-lock absorbs it

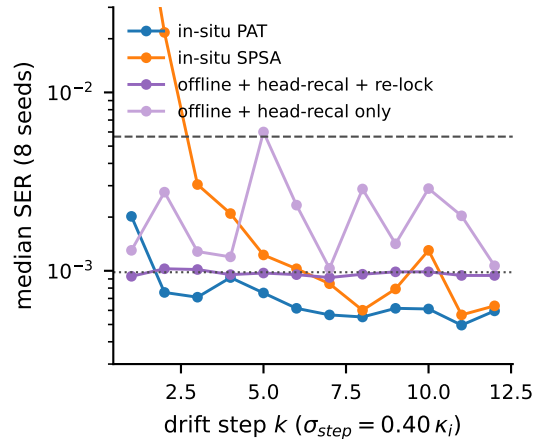

(c) independent per-ring drift:
re-lock cannot

