



(a) tie is robust to calibration error
(crossover $m^* = \text{none}$)

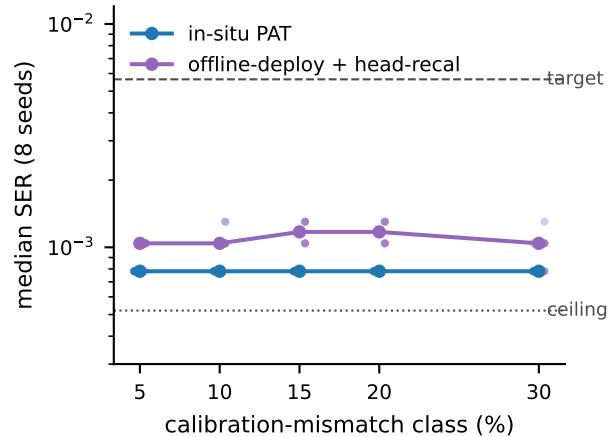

(b) common-mode drift:
re-lock absorbs it

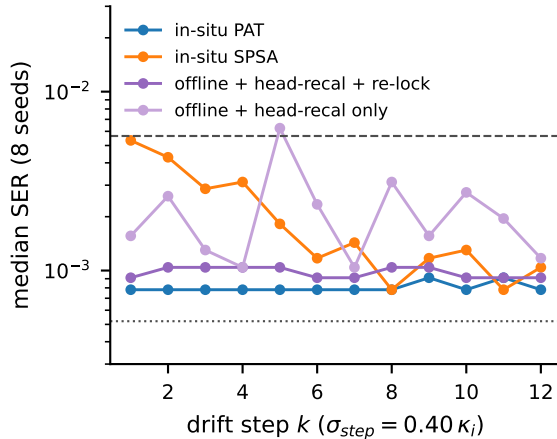

(c) independent per-ring drift:
re-lock cannot

