




### PATH 1 : USB 5V INPUT

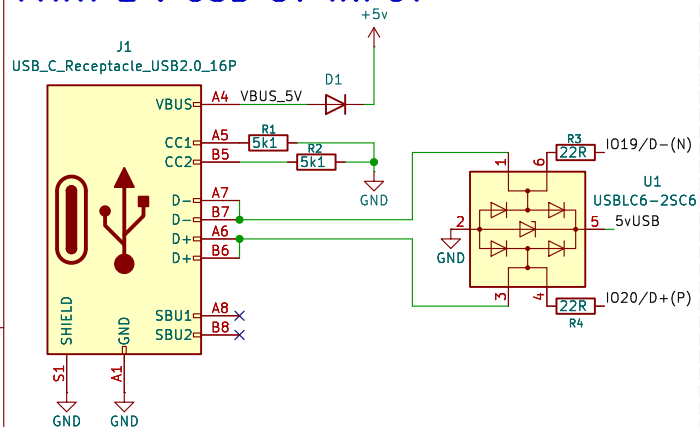

## PATH 2 : CHARGER and POWER

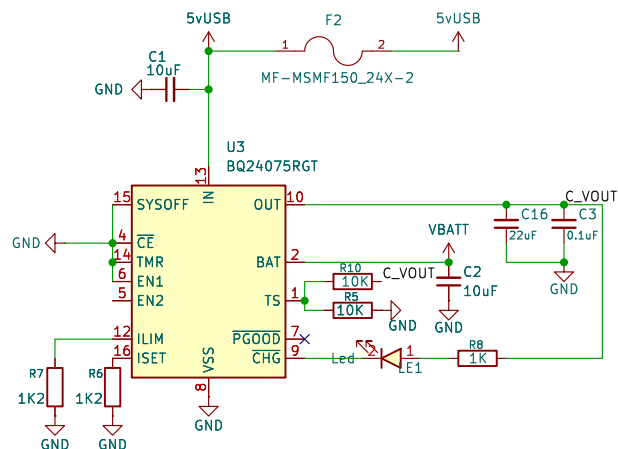


### PATH 3 : BATTERY

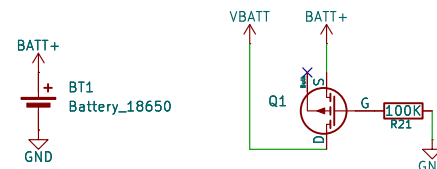

áp đọc từ 3.0– 4.2V


Battery protection handled by protected 18650 cell

## PATH 4 : BUCK-BOOST 3.3V

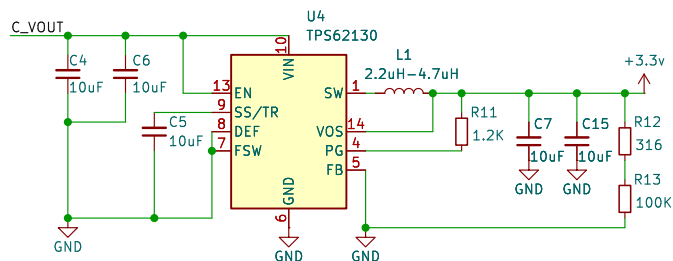


### PATH 5 : 3.3V DISTRIBUTION


## CAMERA

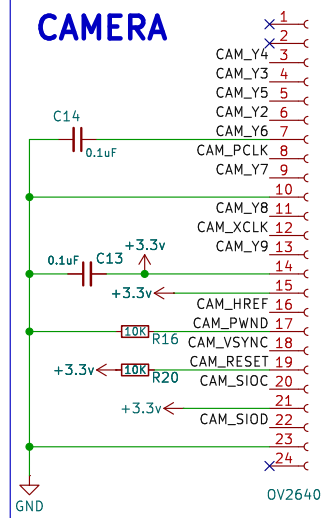


## UART R307

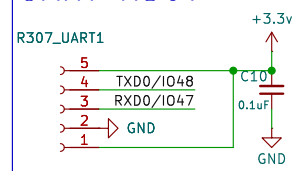



## SPI LCD

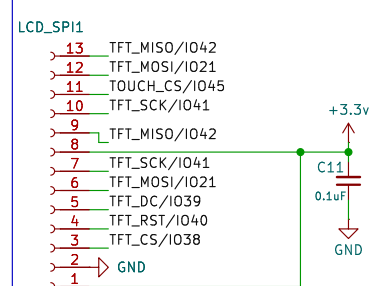

**BOOT SW**



## RST SW

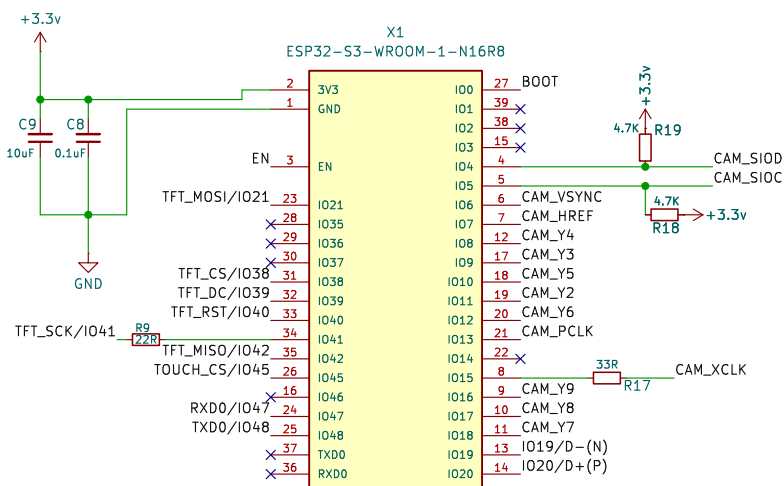

Sheet: /  
File: Biometric\_attendance\_system.kicad\_sch

**Title:**

Size: A4	
KiCad E.D.A. 8.0.4	

Date:

Rev:  
Id: 1/1