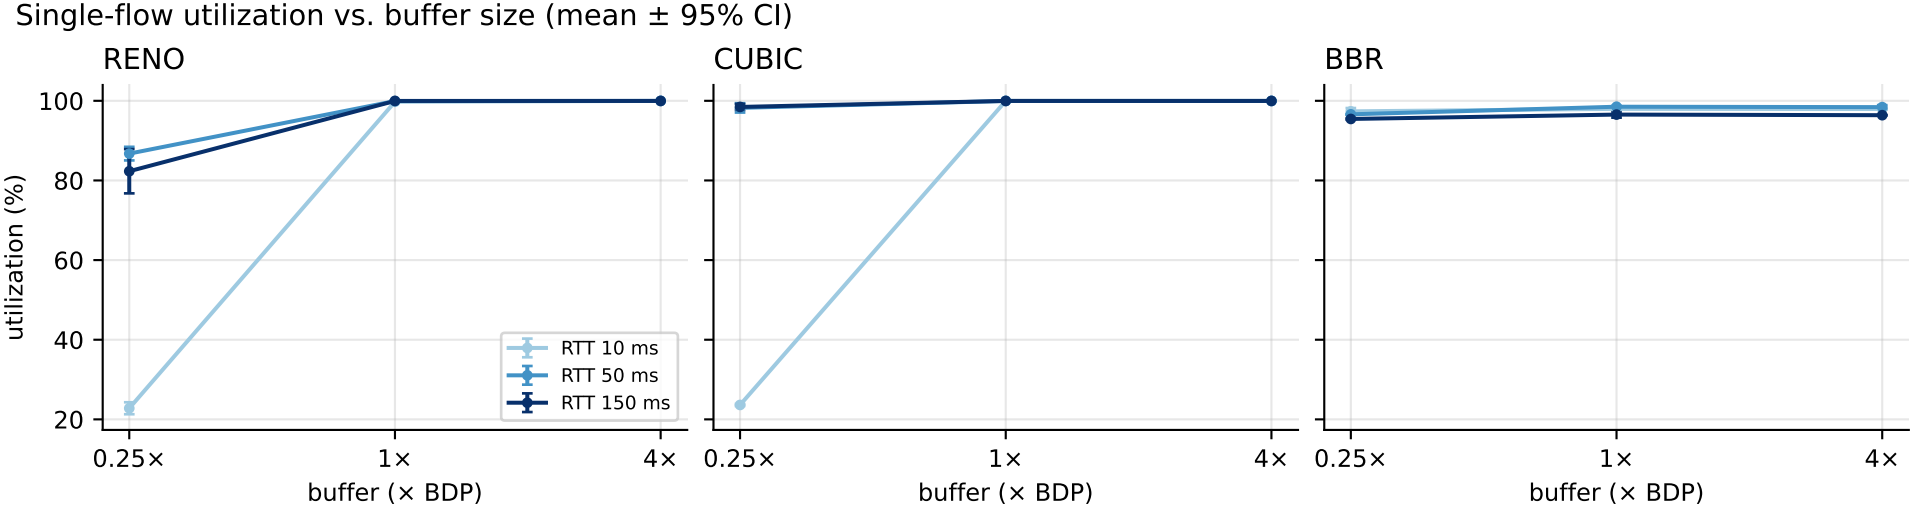
Single-flow utilization vs. buffer size (mean ± 95% CI)
RENO
CUBIC
BBR
utilization (%)
100
80
60
40
20
RTT 10 ms
RTT 50 ms
RTT 150 ms
0.25×
1×
4×
buffer (× BDP)