Node–time encoder–decoder for heterogeneous SIPS
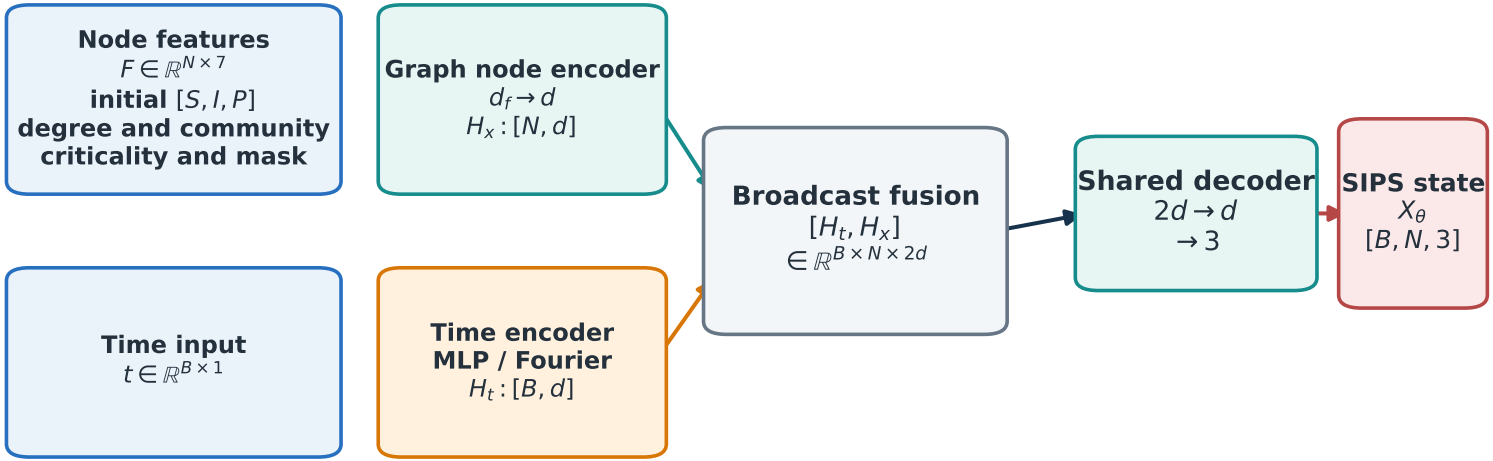
Node features encode reusable heterogeneity; the time branch represents temporal variation without one output head per node.