

# **Computer Networks Lab**

## **Network Simulator Project**

## Members

Adithyan M V	-	5
Akshaylal S	-	6
Alwin C Sheejoy	-	7
Bharathan	-	21
Jinso Raj	-	32
Rohit	-	54

## Problem Statement

An organization is granted a network address 192.168.14.0. They need 14 subnets. Design the subnet and implement dynamic routing between the fourth and seventh subnet using the network simulator NS3.

## Subnetting

ip address : 192.168.14.0  
subnet mask : 255.255.255.240

Subnet 4	192.168.14.48	-	192.168.14.63
Subnet 7	192.168.14.96	-	192.168.14.111
Router	192.168.14.240	-	192.168.14.255

## Implementation Details

### Router 1

```
fa0/0 : 192.168.14.49
se0/0 : 192.168.14.241


R1#config terminal
R1(config)#int fa0/0
R1(config-if)#ip address 192.168.14.49 255.255.255.240
R1(config-if)#exit
R1(config-if)#no shut
R1(config)#int se0/0
R1(config-if)#ip address 192.168.14.241 255.255.255.240
R1(config-if)#clock rate 64000
R1(config-if)#no shut
R1(config-if)#exit
R1(config)#router rip
R1(config-router)#network 192.168.14.48
R1(config-router)#network 192.168.14.240
```

## Router 2

```
fa0/0 : 192.168.14.97
se0/0 : 192.168.14.242

R2#config terminal
R2(config)#int fa0/0
R2(config-if)#ip address 192.168.14.97 255.255.255.240
R2(config-if)#no shut
R2(config-if)#exit
R2(config)#int se0/0
R2(config-if)#ip address 192.168.14.242 255.255.255.240
R2(config-if)#no shut
R2(config-if)#exit
R2(config)#router rip
R2(config-router)#network 192.168.14.96
R2(config-router)#network 192.168.14.240
```

## Design Diagram

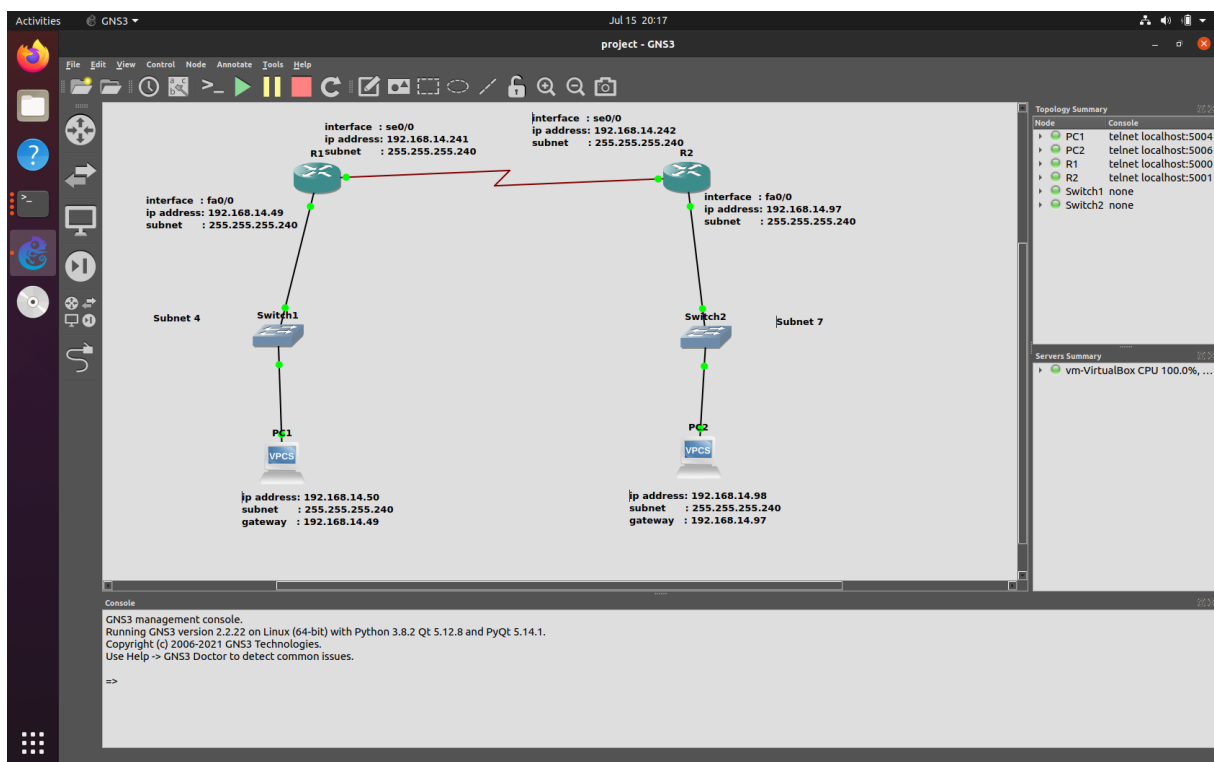

## Output Screen

