


2025 model vs measured electricity use


Driving mass matched; other test conditions differ

Model onboard Model battery/charging losses Published measurement

Cars · measured AC charging energy; model WLTC vs ADAC Ecotest

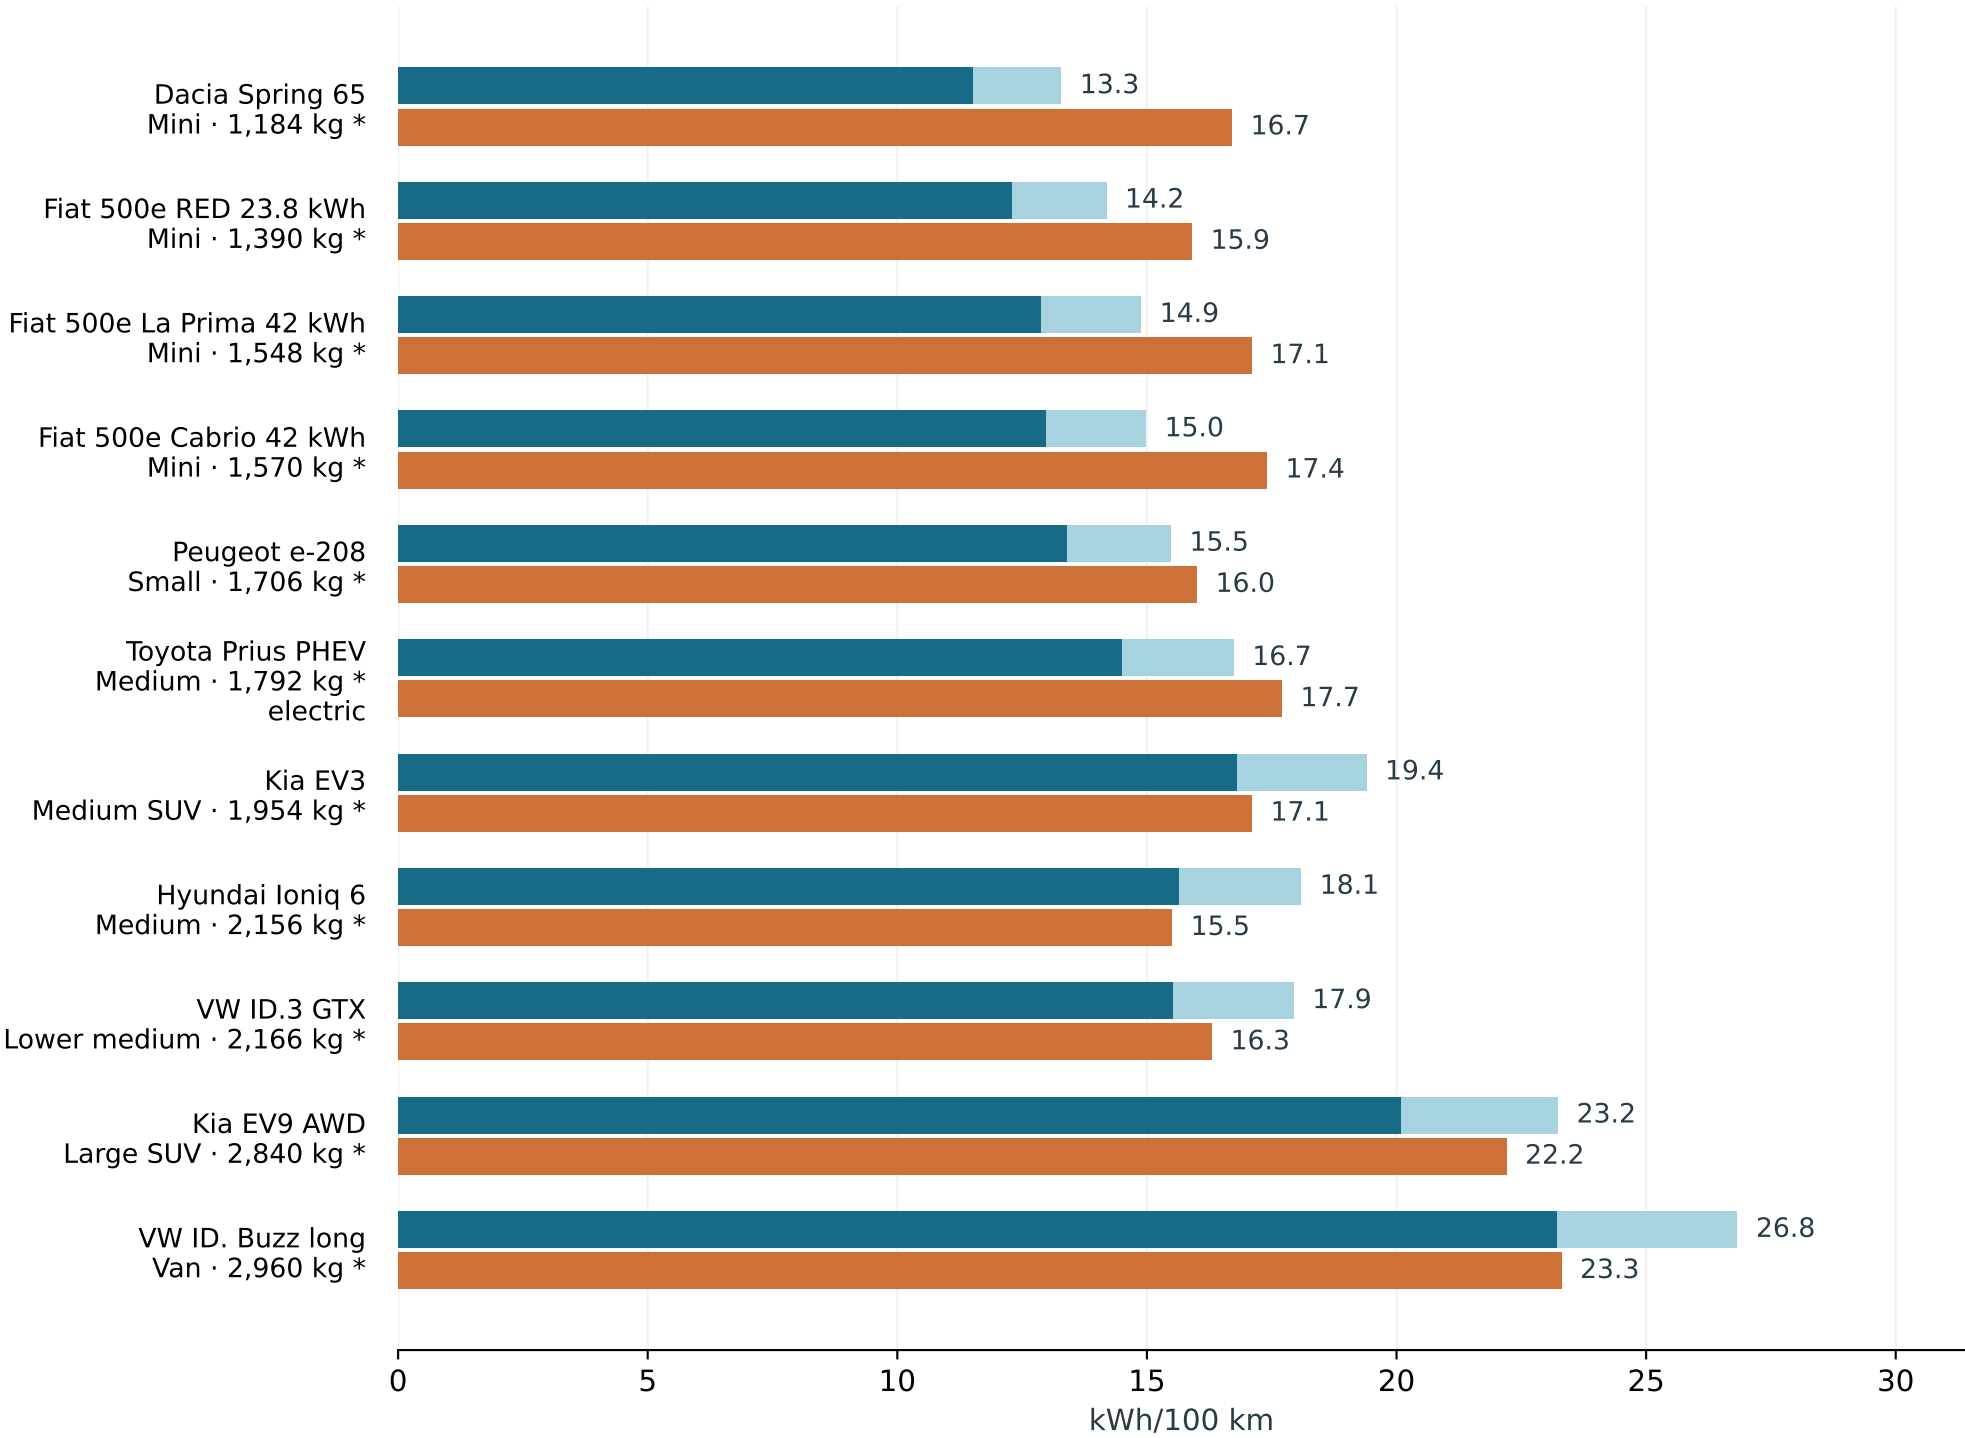


Trucks · reported meter boundary unresolved; routes differ

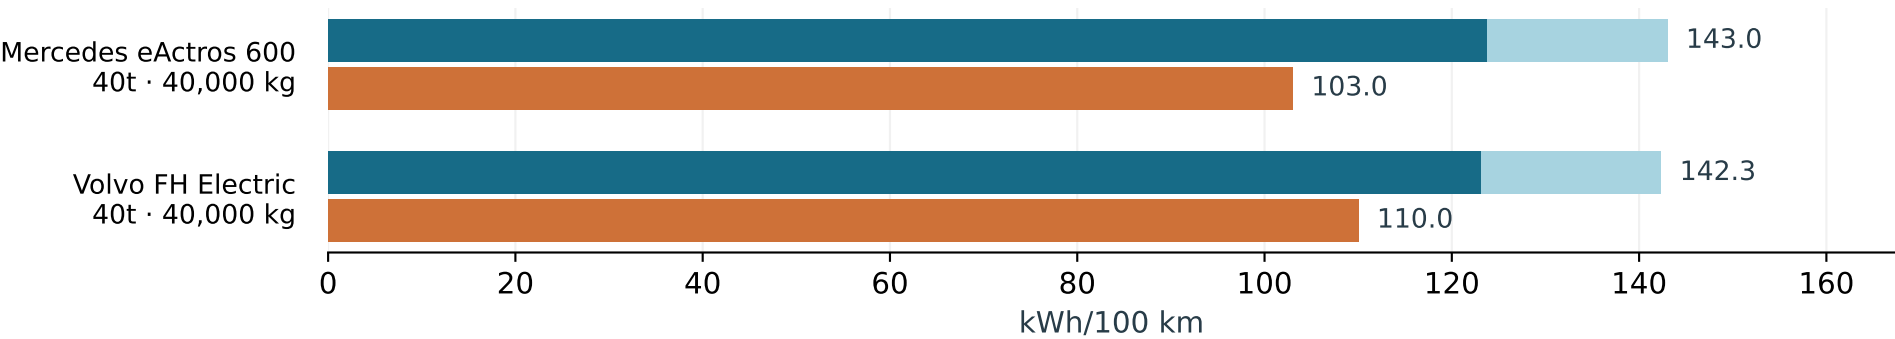

* Reconstructed mass = ADAC measured curb mass + documented 200 kg test payload.
Truck mass is explicitly reported. Dark + light model segments total charging energy.
Class road loads and efficiencies retained. These comparisons are screening evidence, not validation.

2025 model vs measured liquid-fuel use

Model WLTC ADAC Ecotest

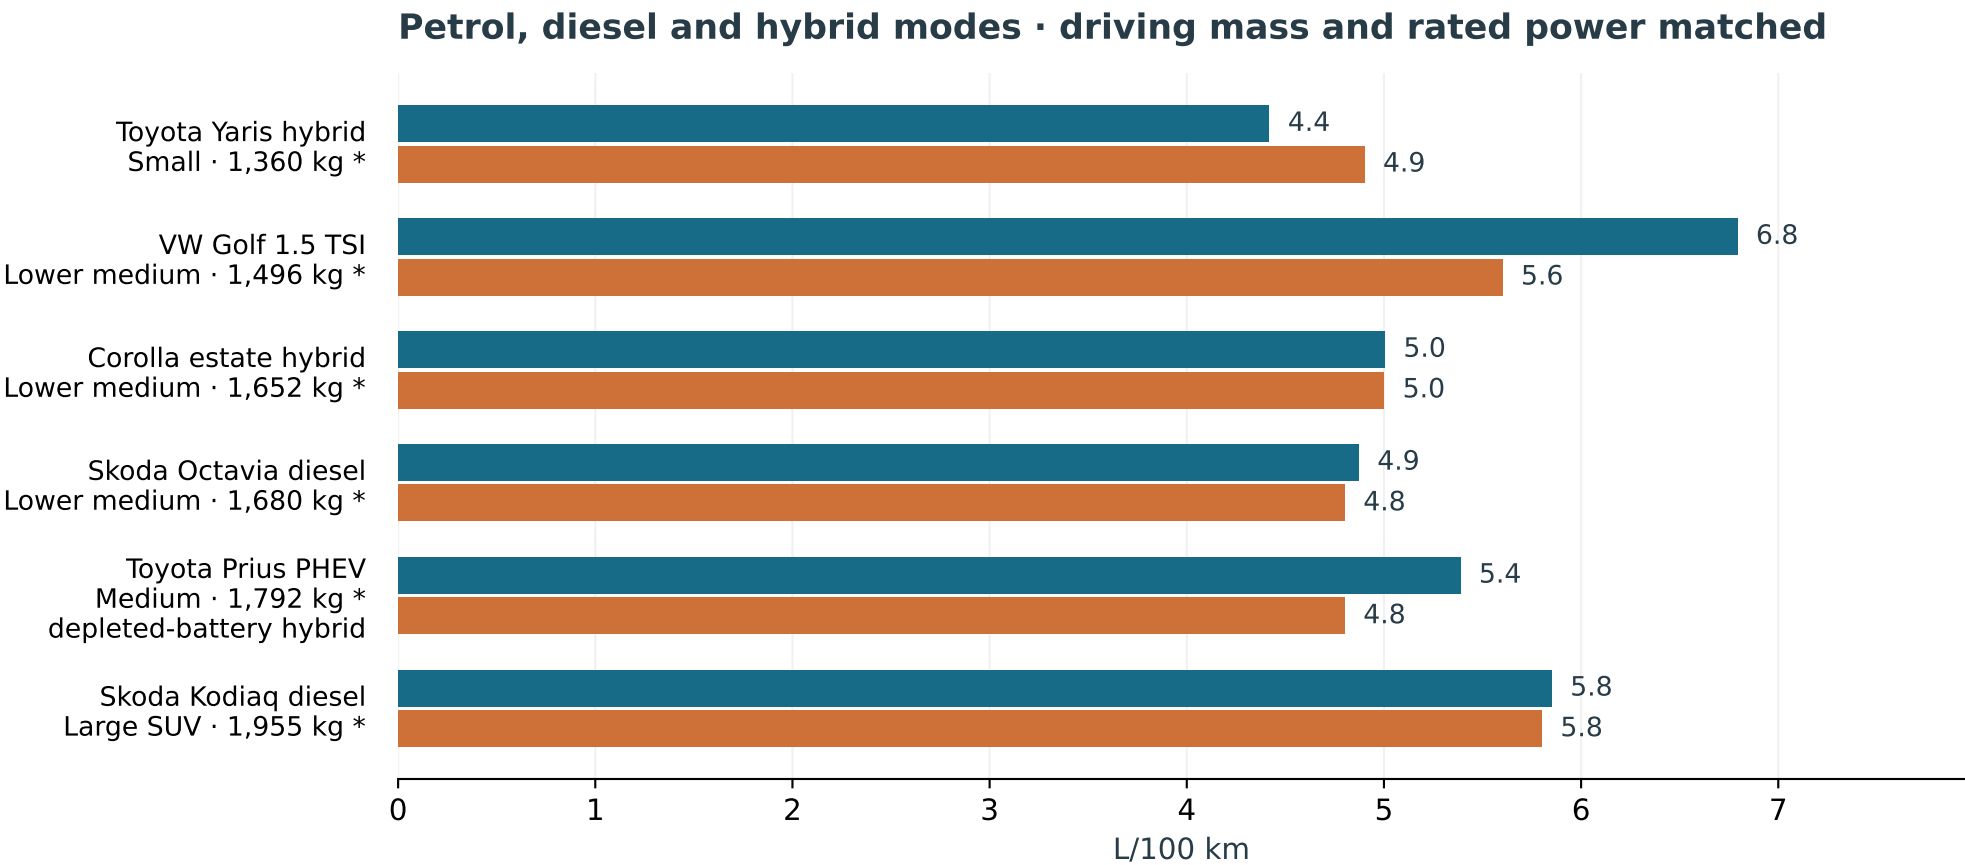


* Reconstructed mass = ADAC measured curb mass + documented 200 kg test payload.
Cycles, conditioning, road loads and hybrid control differ; no calibration to measured consumption.

2025 model vs measured gaseous-fuel use

Model WLTC ADAC Ecotest


CNG · fuel mass at the vehicle

SEAT Leon CNG
Lower medium · 1,595 kg *

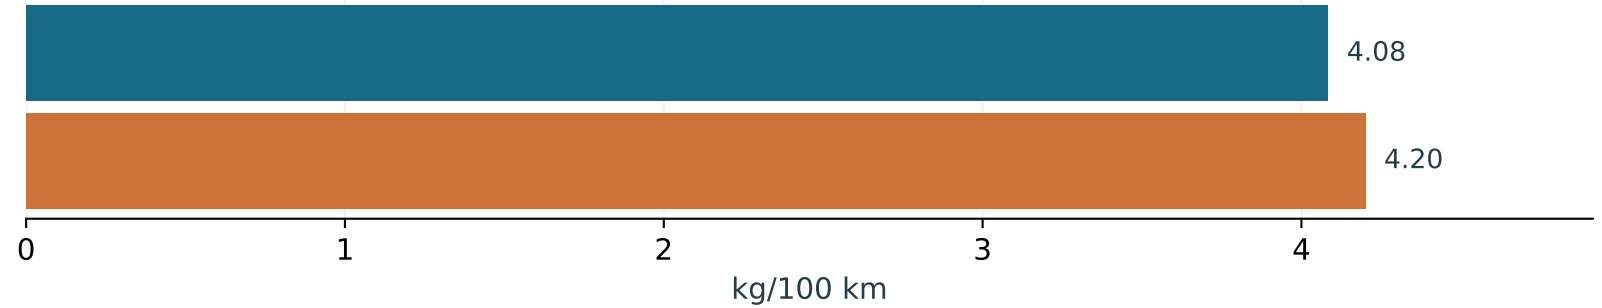

Hydrogen · fuel mass at the vehicle


Toyota Mirai hydrogen
Large · 2,140 kg *

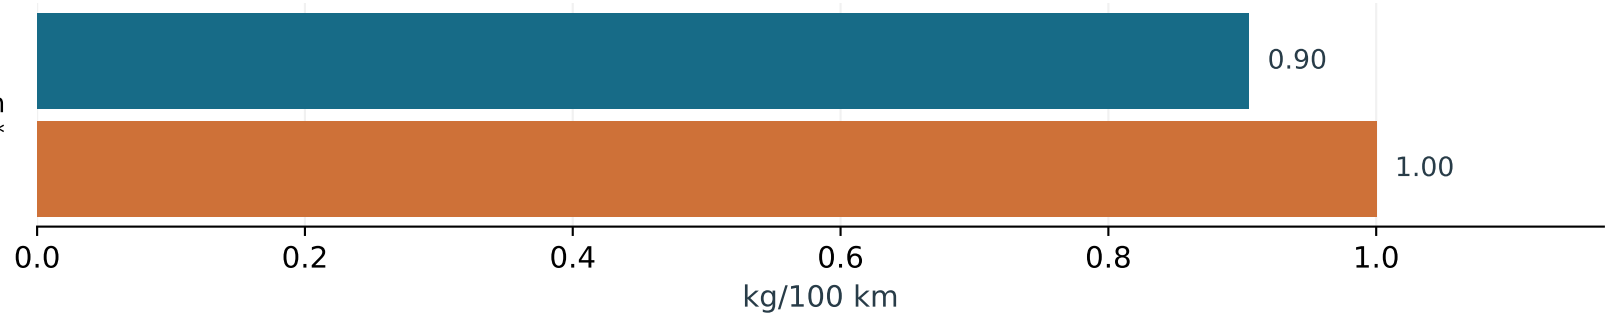

* Reconstructed mass = measured curb mass + documented 200 kg test payload.
Different fuels have different energy contents; kilograms are not comparable across panels.
Model year 2025; measured tests from 2021. Cycles, fuel composition and control differ.

Delivery truck · battery and grid boundaries

■ Model onboard ■ Model battery/charging losses ■ Published measurement

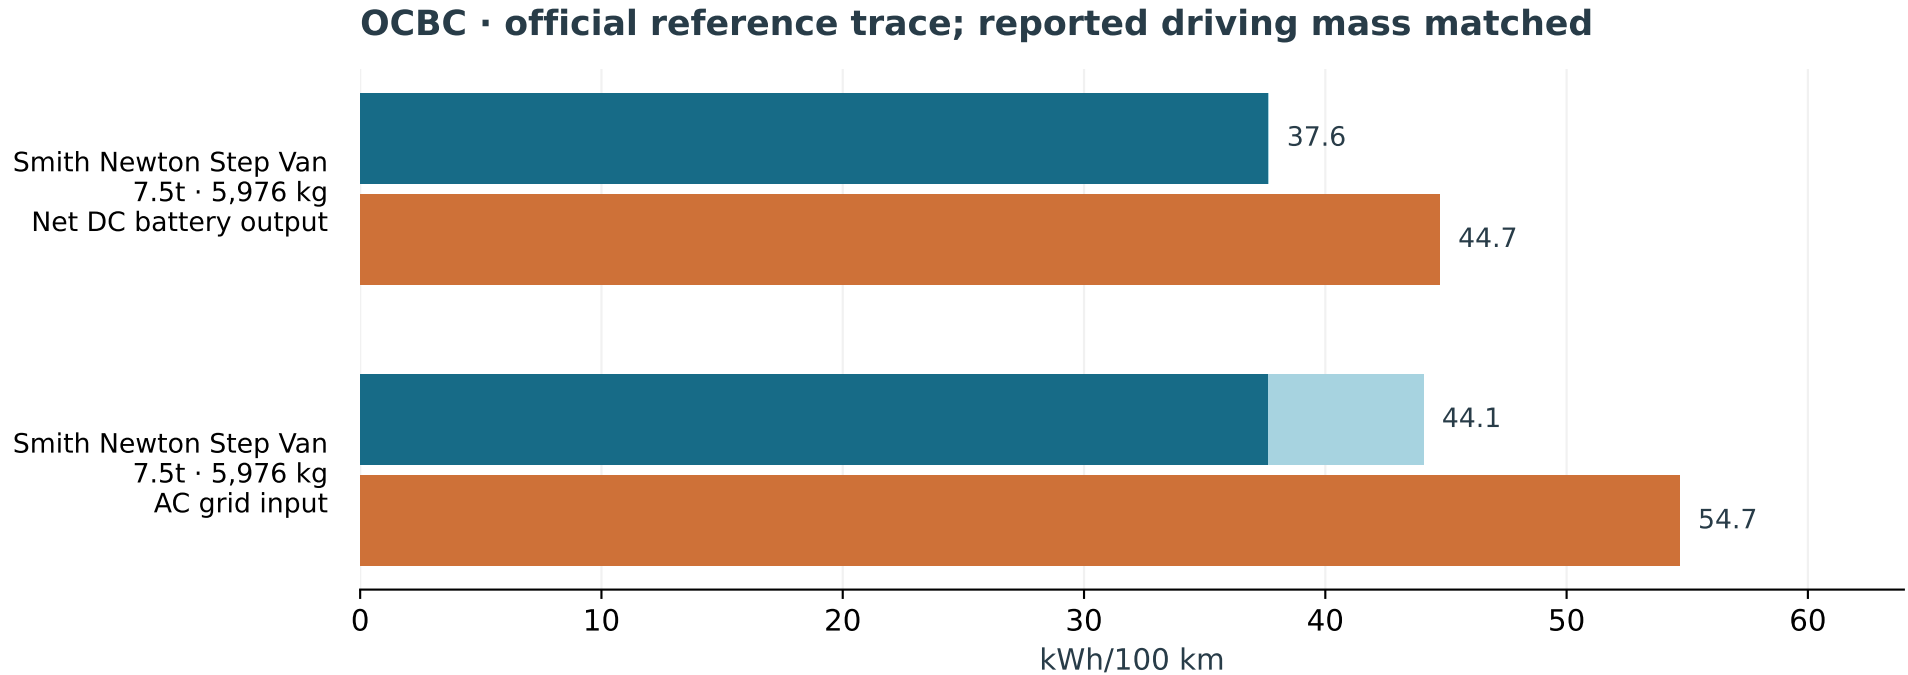

Two meter boundaries for one test and one model run; not independent tests.


DC compares onboard energy; AC includes battery and charging losses.

2025 class model vs 2013 vehicle. Road load, auxiliaries and efficiencies differ.

Source explicitly sets 13,175 lb; its curb-plus-half-payload description conflicts with its specifications.

Diesel delivery truck · published test cycles


2025 model NREL dynamometer measurement

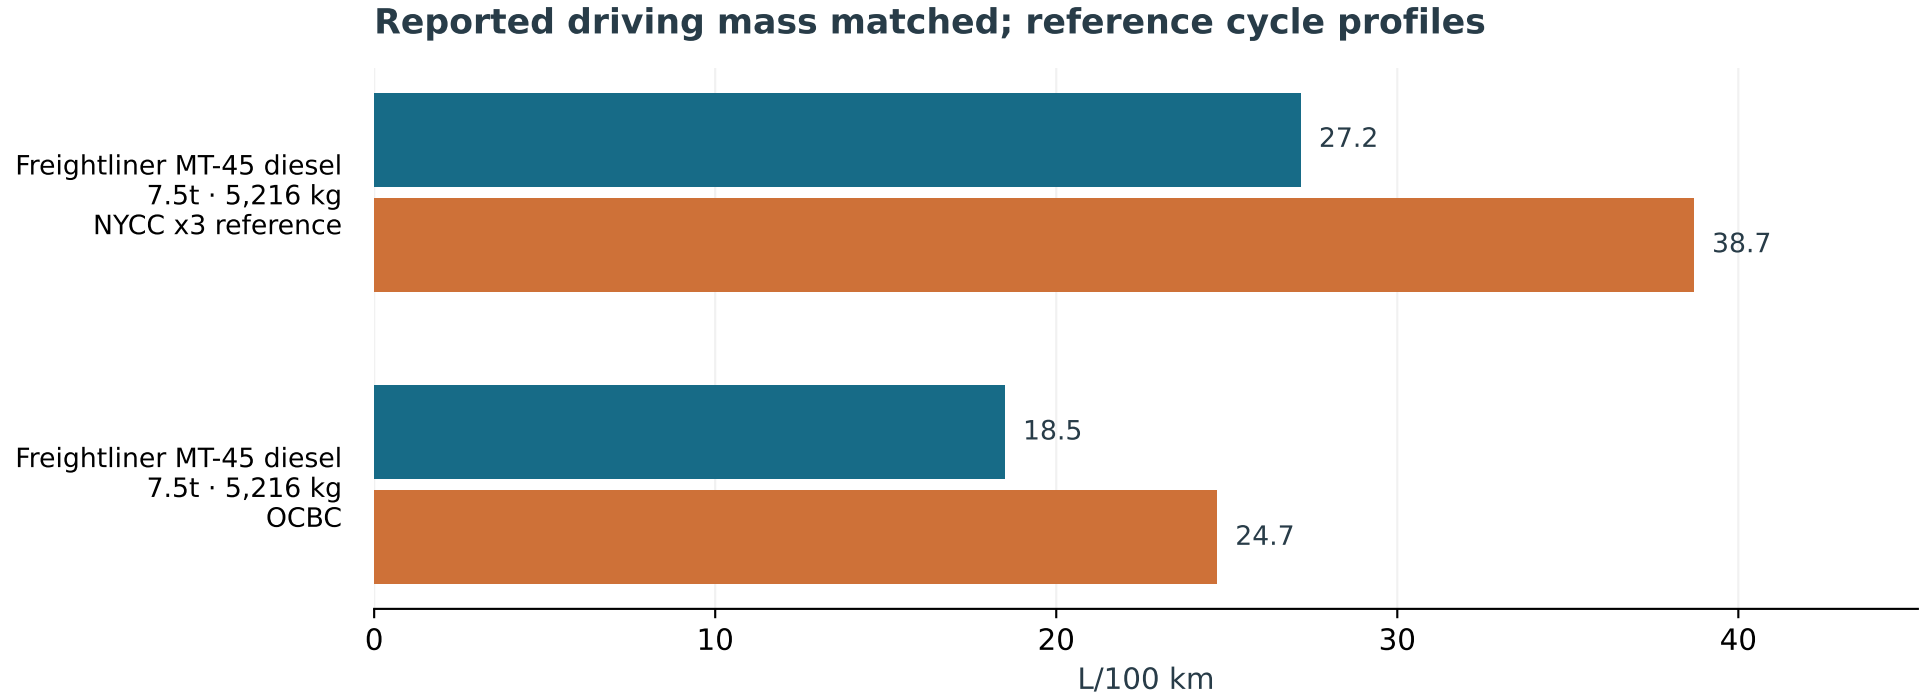

Two cycles on one diesel truck; historical measurements from 2009.
Actual speed tracking, road load, conditioning and fuel properties differ.
Road load, auxiliaries and historical powertrain operation remain approximations.

Electric bus · measured AC charging energy

Model onboard Model battery/charging losses Altoona measurement

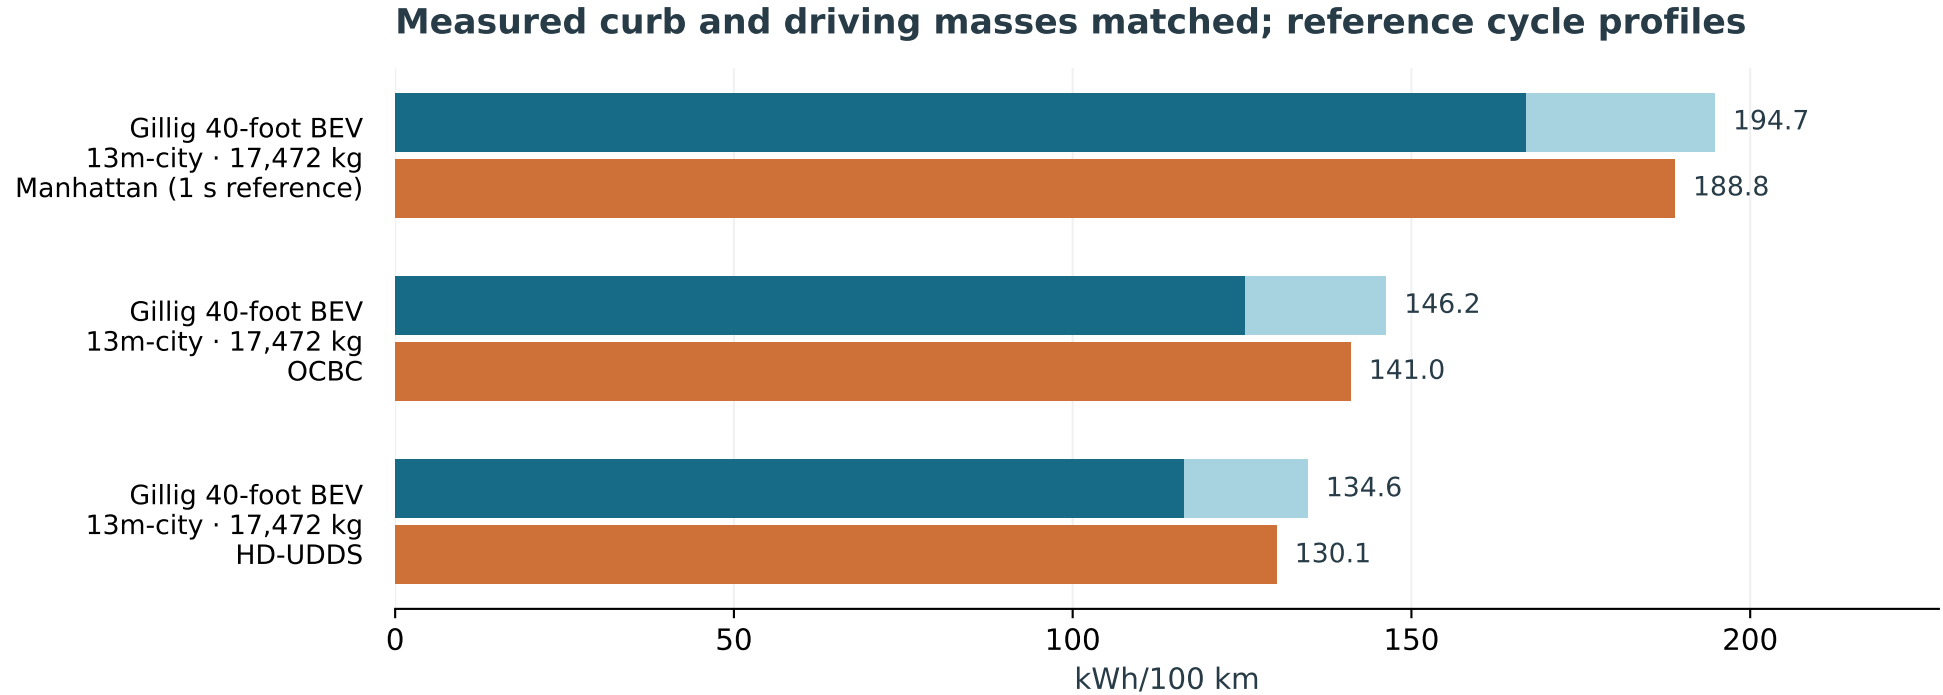

Model year 2025; measurements from March 2021. Three cycles on one bus.


Base auxiliaries use the transferred 8.3 kW prior; road load and motor rating remain approximations.

Manhattan resampled to 1 s: positive squared-speed change -2.75%; distance +0.005%.

OCBC and HD-UDDS informed calibration; Manhattan was held out. This is not independent validation.

Electric bus · unresolved measurement boundary


Model battery-terminal energy Model charging losses Published SORT measurement

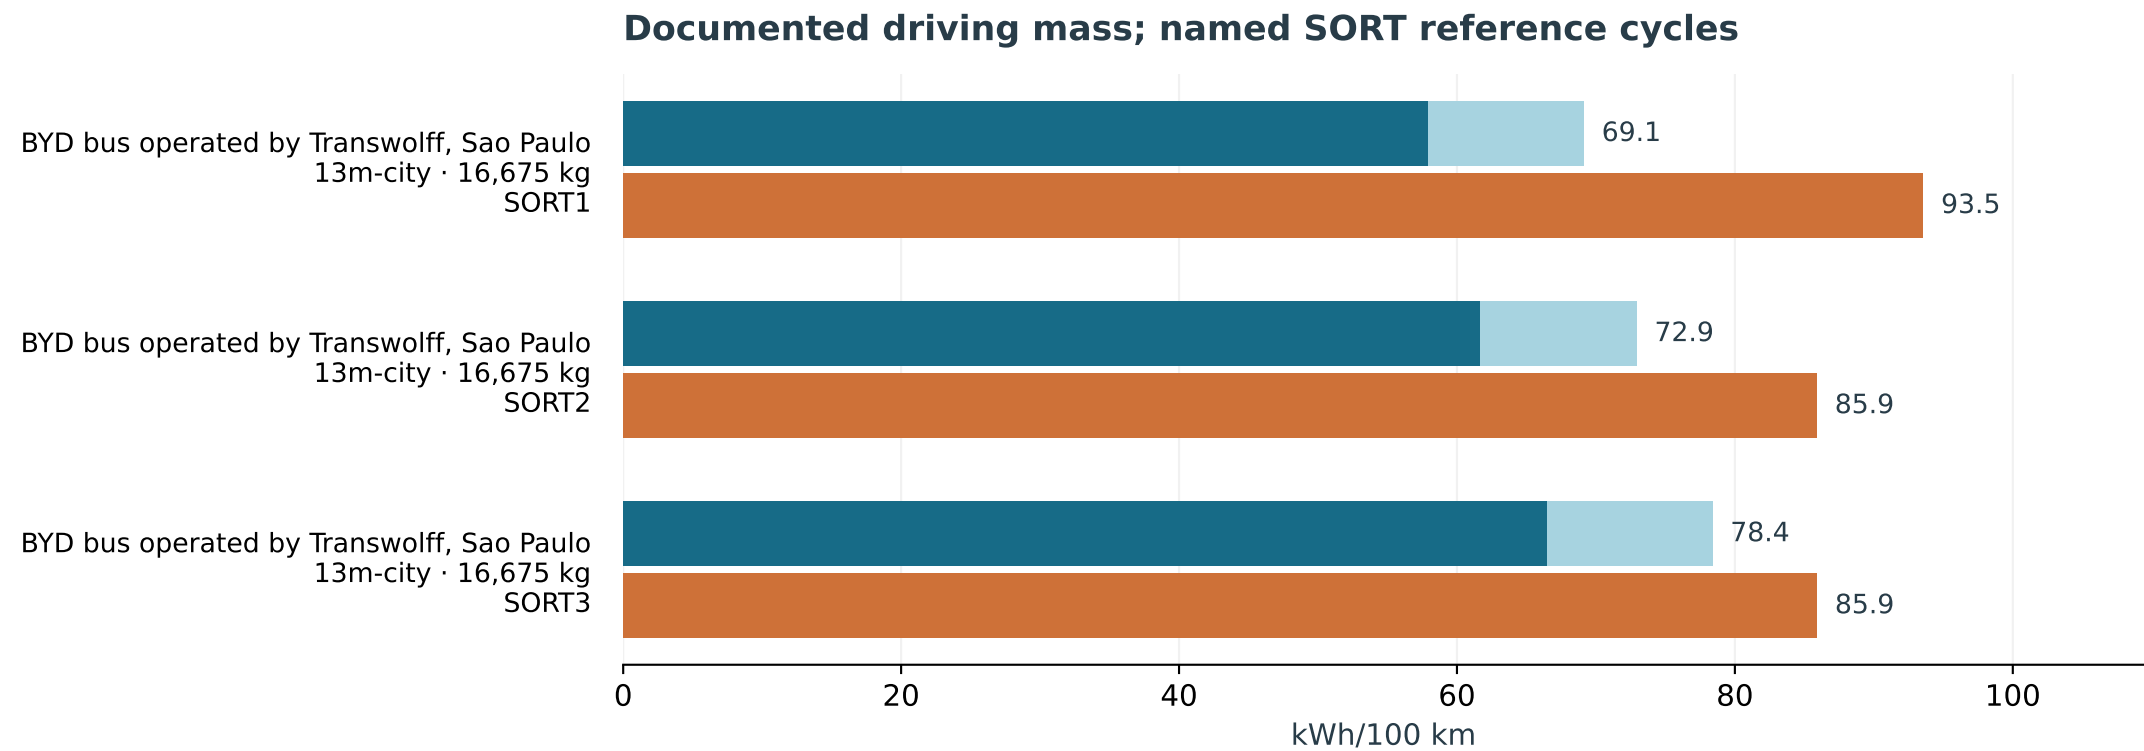

Source meter boundary is unresolved: neither model boundary is a confirmed like-for-like comparison.
Auxiliaries are off as documented. Historical test vehicle compared with 2025 component priors.
Screening evidence only; these measurements were not used to fit the auxiliary default.

Diesel and hybrid buses · historical cycle tests

2025 model 1999 NAVC/WVU measurement

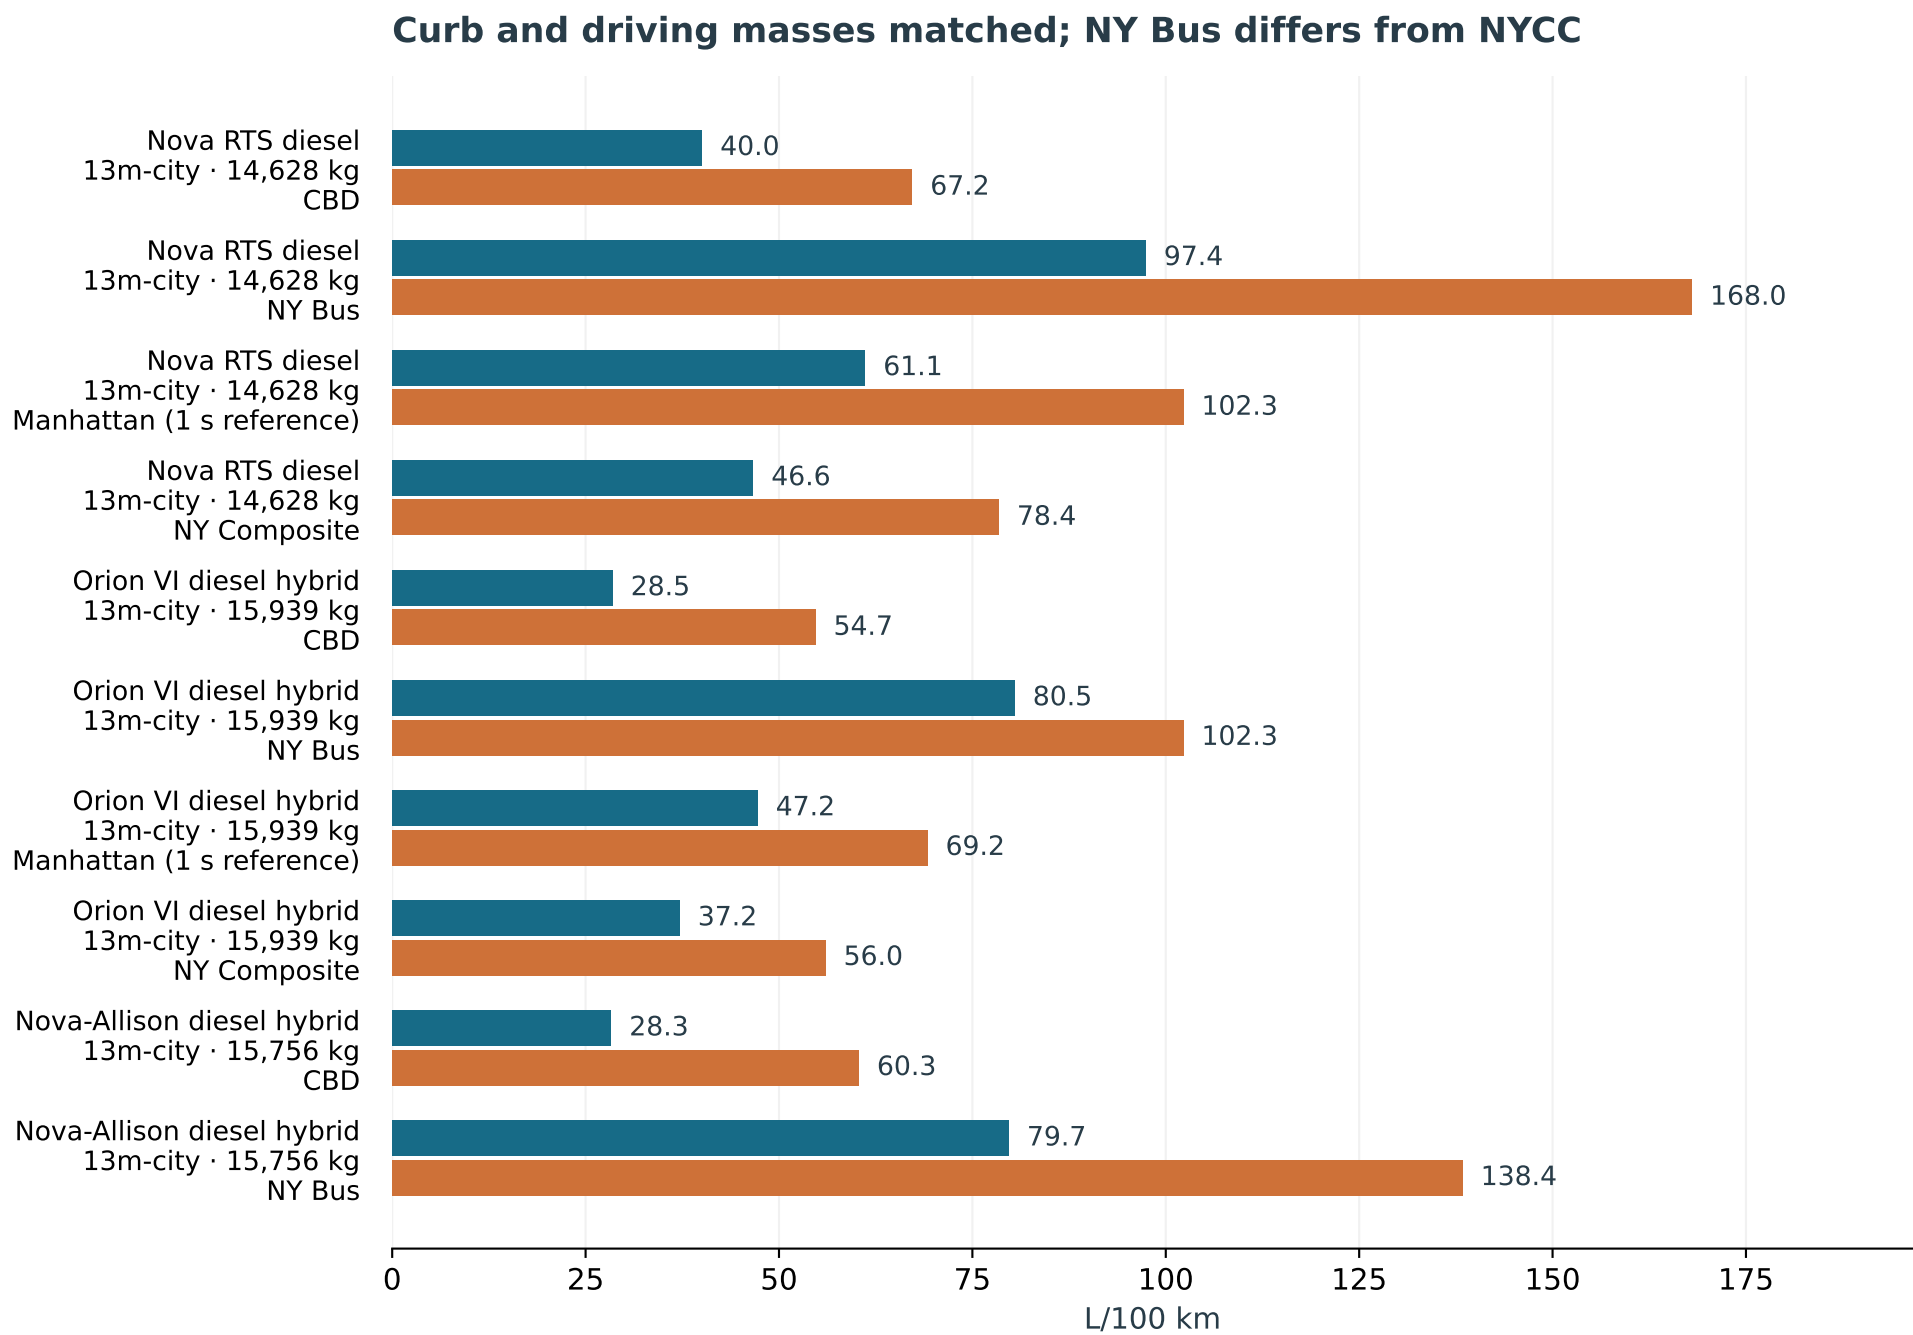

NY Bus and Manhattan resampled to 1 s. Manhattan positive squared-speed change -2.75%.
1999 vehicles versus 2025 class technology: engine, fuel, auxiliaries and control differ.
Historical technology and control differences limit interpretation of agreement.