

Fermi-Pasta-Ulam Problem

Lachlan Kan

March 2025

1 Introduction

Consider $N + 1$ unit masses connected by springs of unit strength. We can write down the following Hamiltonian.

$$H = \frac{1}{2} \sum_{i=0}^N p_i^2 + \frac{1}{2} \sum_{i=0}^N (x_{i+1} - x_i)^2 \quad (1)$$

The boundary conditions are such that the "virtual points" $x_{N+1} = x_{-1} = 0$. We will use this boundary condition for the remainder of this project. Notice that since we start counting from 0, our index goes up until N and thus we end up with $N + 1$ masses. Notice that for any i , there are two terms in the potential that concerns it. They are as follows

$$(x_{i+1} - x_i)^2 + (x_i - x_{i-1})^2 \quad (2)$$

With this information, the equations of motion can be easily found via Hamilton's equations, where taking the derivative with respect to x_i amounts to focusing only on the segment from (2) that concerns the mass.

$$\frac{\partial p_i}{\partial t} = -\frac{\partial H}{\partial x_i} = x_{i+1} + x_{i-1} - 2x_i \quad (3)$$

$$\frac{\partial x_i}{\partial t} = \frac{\partial H}{\partial p_i} = p_i \quad (4)$$

Which leads to the following second order differential equation.

$$\ddot{x}_i = x_{i+1} + x_{i-1} - 2x_i \quad (5)$$

For each mass, we can ansatz a solution $x_i = A_i e^{j\omega t}$, where $j \equiv \sqrt{-1}$ and we assume that they all share the same angular frequency ω . Clearly this will only be the case when the system is oscillating in a normal mode. Hence we are solving for the normal modes. Using this ansatz, (5) becomes

$$-\omega^2 A_i = A_{i+1} + A_{i-1} - 2A_i \quad (6)$$

Writing out all the differential equations for $i = \{0, 1, 2, \dots, N\}$ and getting all the terms to one side, we obtain the following

$$\begin{cases} 0 &= (\omega^2 - 2)A_0 + A_1 \\ 0 &= A_0 + (\omega^2 - 2)A_1 + A_2 \\ 0 &= A_1 + (\omega^2 - 2)A_2 + A_3 \\ \vdots & \\ 0 &= A_{N-1} + (\omega^2 - 2)A_N \end{cases} \quad (7)$$

This is now a linear system of equations with $N + 1$ equations. To solve this system, we must call upon linear algebra. Consider a vector with its component being that of the amplitudes.

$$\mathbf{a} = \begin{bmatrix} A_0 \\ A_1 \\ \vdots \\ A_{N-1} \\ A_N \end{bmatrix} \quad (8)$$

Now we must construct the matrix. Notice that all the entries on the diagonal are $\omega^2 - 2$, since the coefficients on A_i is $\omega^2 - 2$. On their neighbours A_{i-1} and A_{i+1} , the entries are all 1. Hence, the matrix is

$$\mathbf{M} = \begin{bmatrix} \omega^2 - 2 & 1 & 0 & 0 & \dots & 0 & 0 & 0 \\ 1 & \omega^2 - 2 & 1 & 0 & \dots & 0 & 0 & 0 \\ 0 & 1 & \omega^2 - 2 & 1 & \dots & 0 & 0 & 0 \\ & & \vdots & \vdots & & \vdots & & \\ 0 & 0 & 0 & 0 & \dots & 1 & \omega^2 - 2 & 1 \\ 0 & 0 & 0 & 0 & \dots & 0 & 1 & \omega^2 - 2 \end{bmatrix} \quad (9)$$

This is a discrete Laplacian matrix of the tridiagonal form. Now, the system of (7) reduces to the following vector equation

$$\mathbf{M}\mathbf{a} = \mathbf{0} \quad (10)$$

Or, equivalently expanded, we have the following

$$\begin{bmatrix} \omega^2 - 2 & 1 & 0 & 0 & \dots & 0 & 0 & 0 \\ 1 & \omega^2 - 2 & 1 & 0 & \dots & 0 & 0 & 0 \\ 0 & 1 & \omega^2 - 2 & 1 & \dots & 0 & 0 & 0 \\ & & \vdots & \vdots & & \vdots & & \\ 0 & 0 & 0 & 0 & \dots & 1 & \omega^2 - 2 & 1 \\ 0 & 0 & 0 & 0 & \dots & 0 & 1 & \omega^2 - 2 \end{bmatrix} \begin{bmatrix} A_0 \\ A_1 \\ A_2 \\ \vdots \\ A_{N-1} \\ A_N \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix} \quad (11)$$

To solve this, we take the determinant of \mathbf{M} and set it to 0. Then we can solve for ω directly. This method is easily implementable on python. However, it is computationally expensive and the computation time gets much longer with every mass added to the chain.

2 Nonlinear Perturbation

We now perturb the spring potential by a nonlinear term. Let α be a small positive number. The new Hamiltonian is therefore

$$H = \frac{1}{2} \sum_{i=0}^N p_i^2 + \frac{1}{2} \sum_{i=0}^N [(x_{i+1} - x_i)^2 + \alpha(x_{i+1} - x_i)^\gamma] \quad (12)$$

Where $\gamma = 2$ or 3 , depending on whether the perturbation is quadratic or cubic. Applying the same Hamilton equations, we arrive at the following equations of motion

$$\dot{p}_i = (x_{i+1} + x_{i-1} - 2x_i) + \alpha[(x_{i+1} - x_i)^\gamma - (x_i - x_{i-1})^\gamma] \quad (13)$$

$$\dot{x}_i = p_i \quad (14)$$

Here, we are interested in solving directly for the equations of motion. For computational purposes, it is best to condense all the momenta and position equations of the particles into one state vector

$$\mathbf{v} = \begin{bmatrix} p_0 \\ x_0 \\ p_1 \\ x_1 \\ \vdots \\ p_N \\ x_N \end{bmatrix} \quad (15)$$

If we denote $\mathbf{v} = v^\mu$ where $\mu = \{0, 1, 2, \dots, 2N\}$, then an even μ denotes momenta and an odd μ denotes position. From (15), we can specify the initial conditions by specifying $\mathbf{v}(0)$. Similarly, we can construct a vector that encodes the time evolution of the state vector

$$\dot{\mathbf{v}} = \begin{bmatrix} \dot{p}_0 \\ \dot{x}_0 \\ \dot{p}_1 \\ \dot{x}_1 \\ \vdots \\ \dot{p}_N \\ \dot{x}_N \end{bmatrix} \quad (16)$$

Where the time derivatives \dot{p}_i and \dot{x}_i can be found in (13) and (14) respectively. In Python, we can solve the system by creating a function that generates the evolution vector, and then passing the function (not the evolution vector itself, but the function that generates it), as well as the initial conditions $\mathbf{v}(0)$ on to `scipy` for solving. Since there is a nonlinear term to the differential equations, it is best to choose the Backwards Differentiation Formula (BDF) method to solve the system. A way to check for correctness of the code is to use only two masses and set $\alpha = 0$. We can then displace the masses identically and release from rest. If this results in a normal mode, then the code is likely to be correct.

3 Modal Spectra

The mode spectra of the FPU oscillator can be found as the Fourier sine transform of the displacement. The discrete Fourier coefficient ϕ_{ik} for the i -th particle in the k -th mode is well known to be

$$\phi_{ki} = \sqrt{\frac{2}{N}} \sin \frac{ik\pi}{N} \quad (17)$$

We can thus construct the matrix ϕ_{ki} where the rows represent modes and columns represent particles. If we extract only the displacement from the state vector and write out all its time evolution on the rows, then we obtain

$$d_{it} = \begin{bmatrix} x_0(0) & x_0(t_1) & x_0(t_2) & \cdots & x_0(t_f) \\ x_1(0) & x_1(t_1) & x_1(t_2) & \cdots & x_1(t_f) \\ \vdots & \vdots & \vdots & & \vdots \\ x_N(0) & x_N(t_1) & x_N(t_2) & \cdots & x_N(t_f) \end{bmatrix} \quad (18)$$

We can thus find the discrete sine transform via the following well known formula

$$a_{kt} = \sqrt{\frac{2}{N}} \sum_i x_i(t) \sin \frac{ik\pi}{N} \quad (19)$$

Notice the t in the subscript means that we must apply the transformation across all time. Notice that we sum across all i , and i is an index that appears in both d_{it} and ϕ_{ik} . This "summing over repeated index" is equivalent to the matrix product. Hence, the Fourier coefficients for every point in time t can be found by the following product

$$a_{kt} = \phi_{ki} d_{it} \quad (20)$$

This can be easily calculated in Python by the @ operator, and has components of the time evolution of each mode. We can easily find the momenta modes by constructing the same matrix in (18) but with momenta, and projecting that onto the basis matrix ϕ_{ki} , which yields the Fourier sine transform of momenta.

3.1 Excitation of Modes

To excite a certain mode, say the k -th mode, all we have to do is initialise the state vector in a way such that the initial displacement matches up exactly with the Fourier coefficient ϕ_{ki} for the i -th particle in that k -th mode. When the initial conditions are set up this way, the mode spectra will show a large amplitude for the desired mode k and very low (zero) amplitudes for the other modes. However, it has been found that if the initial conditions deviate from the expected ϕ_{ki} even for just a little bit, the amplitude will "spread" from the k -th mode to the other modes, resulting in high amplitudes in the other modes over time.

4 Examples

Here are some examples from the Python code, implementing the methods outlined in the previous sections.

4.1 Quadratic Perturbation

Here we will demonstrate the results when $\gamma = 2$, which corresponds to the FPU- α problem.

4.1.1 Testing with a Known Case

To test the code, we first run it with $\alpha = 0$ (no nonlinearity - a known case) with two masses starting with equal displacement. We obtain figure 1. Notice that their displacements are identical. We have reached a normal mode. This is a known case, and we can be more confident that our solver is correct.

4.1.2 Four Masses

We can now examine more interesting cases. Consider 4 masses under quadratic perturbation. Here we have set $\alpha = 1/6$ and displaced them initially with slightly different displacements, as shown in figure 2.

4.2 Fifty Masses

We will test 50 masses displaced identically at the start, released from rest. The plot, shown in figure 3 is beginning to look like that of a continuum. The small plot however, does not do the system justice since its amplitudes of oscillation are somewhat muted due to the sheer volume of masses needed to be fit into the small plot.

4.3 Mode Spectra

Here we will deal with the mode spectra part of the simulation.


4.3.1 Exciting the First Mode

Here, we will initialise the initial conditions such that they match up with the $k = 1$ mode. Again, we will be dealing with 4 masses and testing with no nonlinearity. This results in figure 4. Notice that all other modes are 0 except for the $k = 1$ mode. This is what we expect. We can now see what happens when there exists some nonlinearity, say $\alpha = 1/4$. This results in figure 5. Notice that immediately, some Fourier amplitude gets "transferred" into the second mode.


4.4 Arbitrary Initial Conditions

Here we will impose upon the system of 4 masses an arbitrary set of initial conditions, with $\alpha = 1/4$ and observe the behaviour. This results in figure 6. Notice that one mode still dominates over the other, however the oscillations are now a combination of the modes.


5 Figures

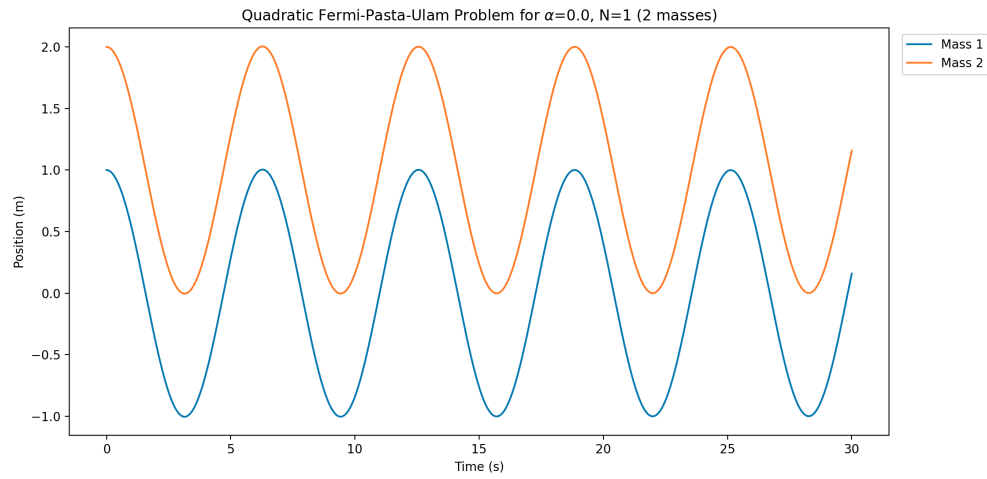


(Fig. 1)

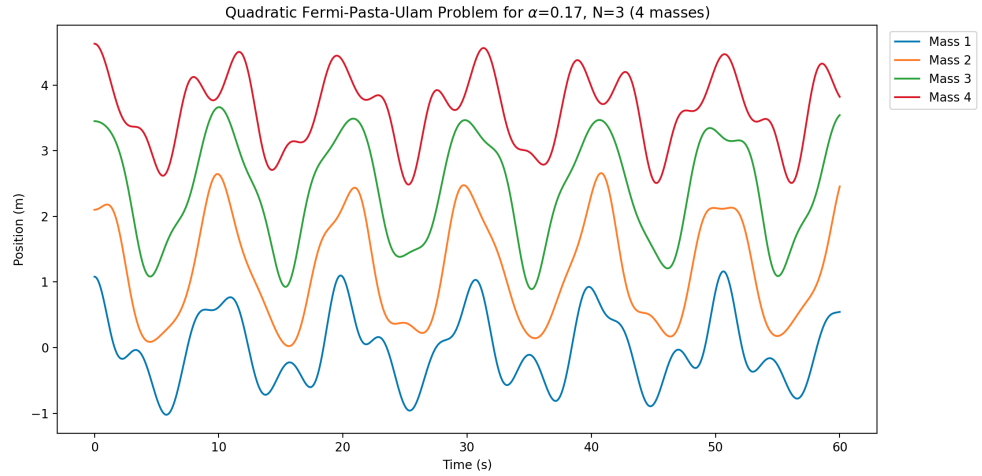


(Fig. 2)

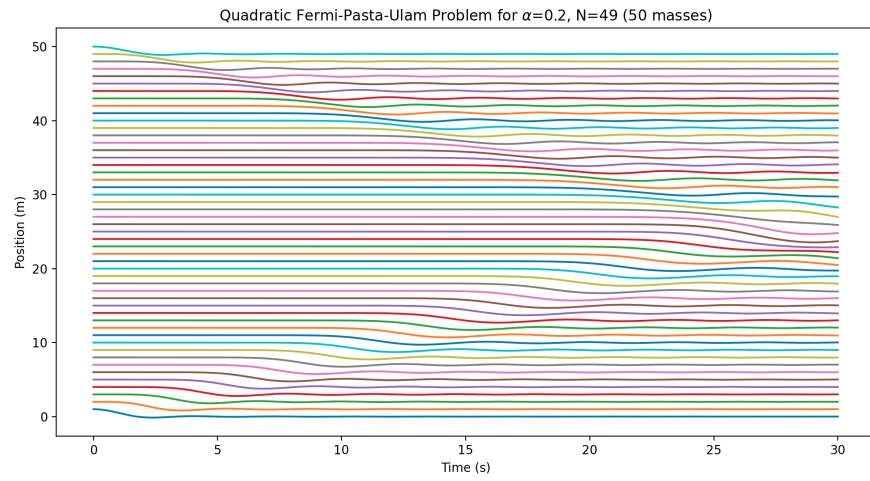


(Fig. 3)

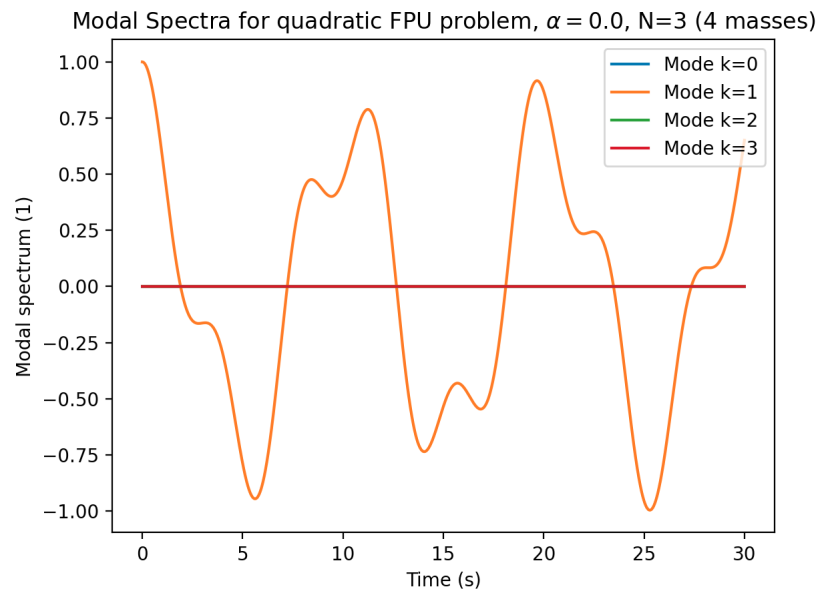

(Fig. 4)

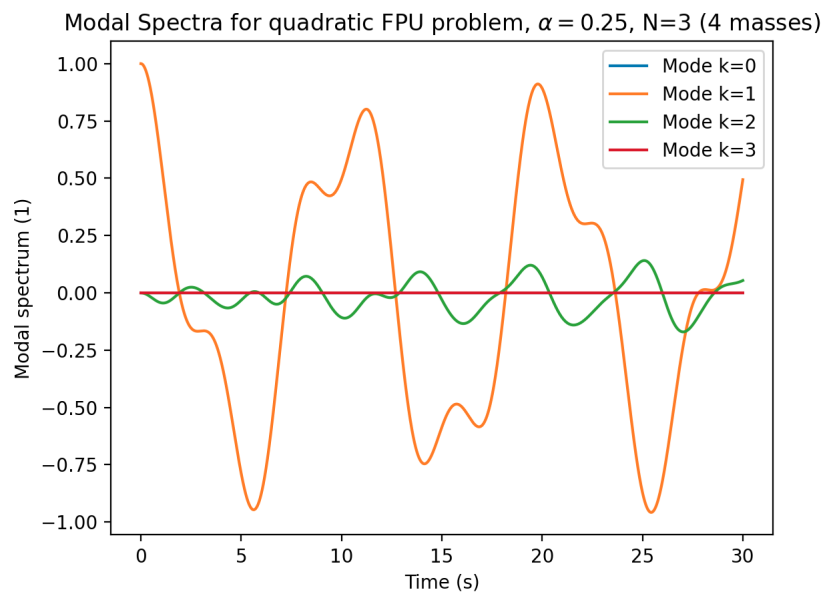

(Fig. 5)

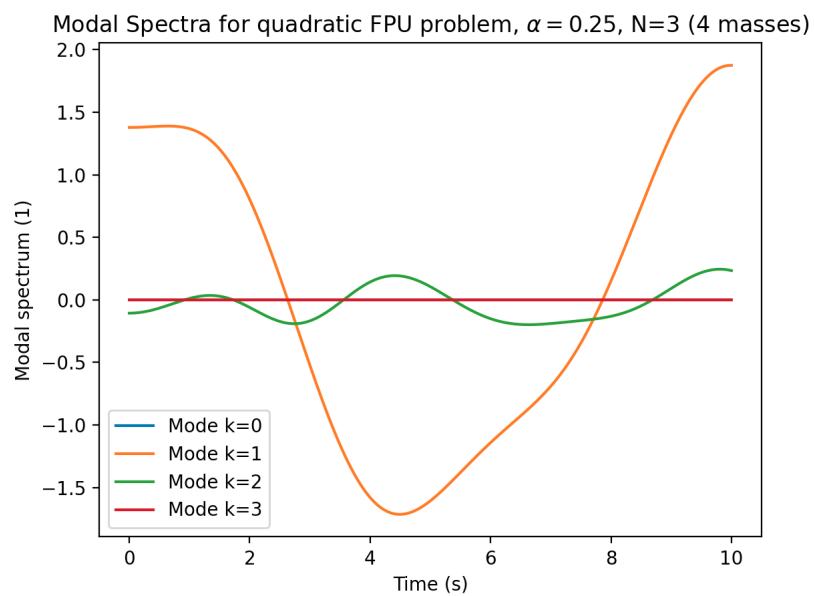

(Fig. 6)