Grandstream Quick Installation Guide

Connect to the internet

Step 1	Connect the ethernet cable to the WAN port of the Grandstream router to an optical fibre broadband modem, ADSL broadband modem or VSAT broadband modem.	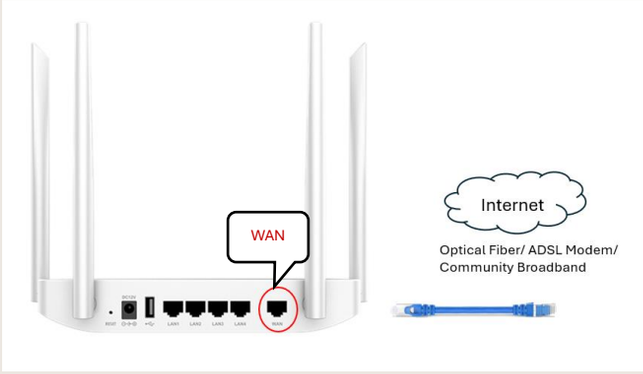
Step 2	**Wireless Connection** • Connect your devices to the SSID • Default SSID and password information is printed on the MAC tag at the bottom of the unit. **Wired Connection** • Connect your computer to one of the LAN ports (1,2,3 or 4)	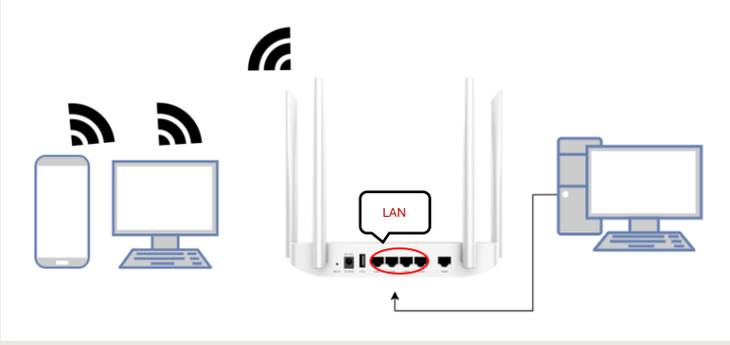

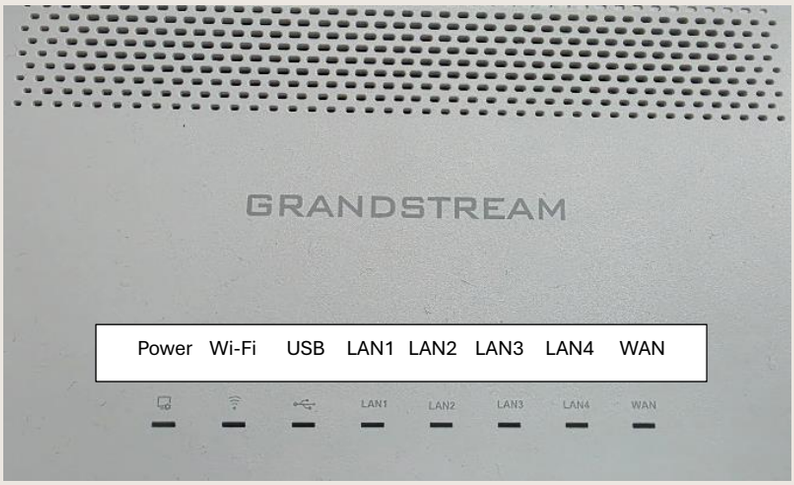

LED	Status	Indication
Power/Provision	Flashing Red	Resetting
	Solid Red	Upgrade failed
	Pink	No Web login after reset
	Green	Powering
	Blue	Normal use
Wi-Fi	Solid Blue	Normal use
	Off	Wi-Fi disabled
WAN	Flashing Blue	Connected as a client to another network, and data is transferring
	Off	No network, and the cable is disconnected.
LAN	Flashing Blue	Connected to the corresponding LAN port, and data is transferring
	Off	No Network; the cable is disconnected
USB	Solid Blue	Connected to USB device
	Off	No USB device is connected

For further assistance, contact **Volt Broadband Support**:

0800 124 734 (Mon - Fri, 9 AM - 5 PM)

support@voltbroadband.co.nz