



Bootloader unlock code (if supported and set by module)

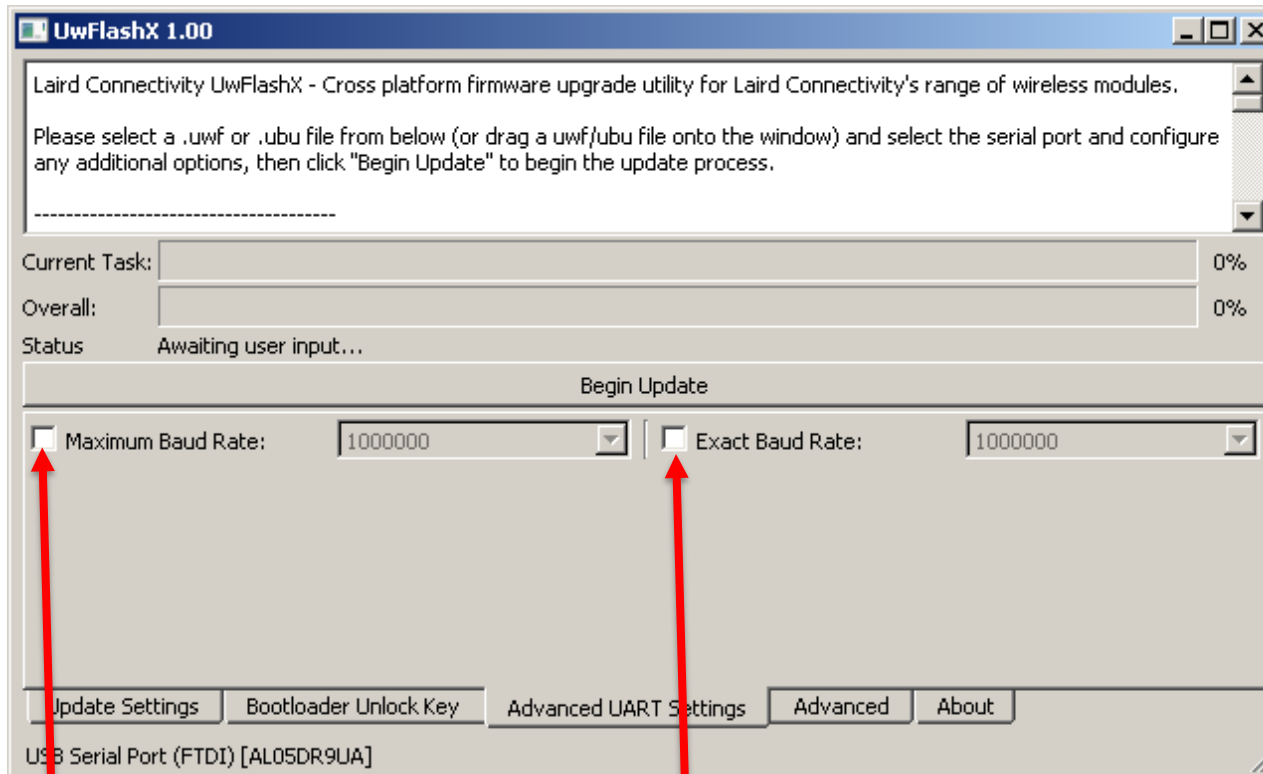

Specifies the maximum baud rate that should be used for uploading data to the bootloader, useful for systems which do not support faster UART baud rates.

Specifies the exact baud rate that should be used for uploading data to the bootloader, this generally should not be used.

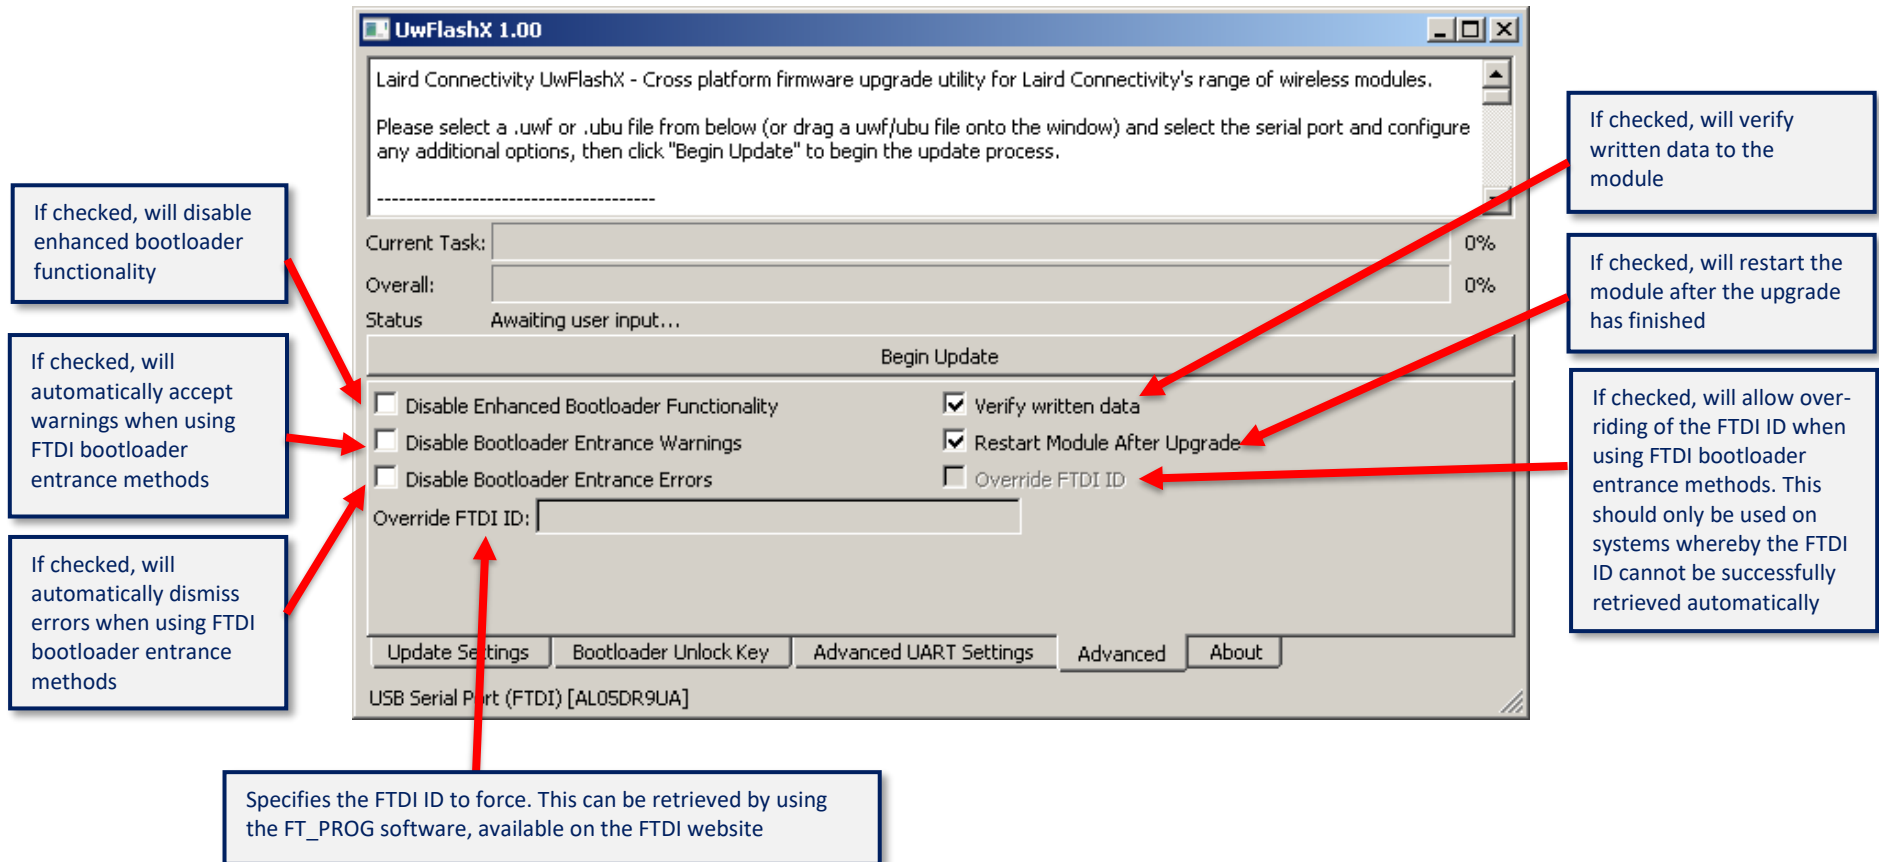

Checks if there is a newer
version of UwFlashX available


Open this help document

Link to the project page

Shows status of version
update check

Version of UwFlashX application

License information

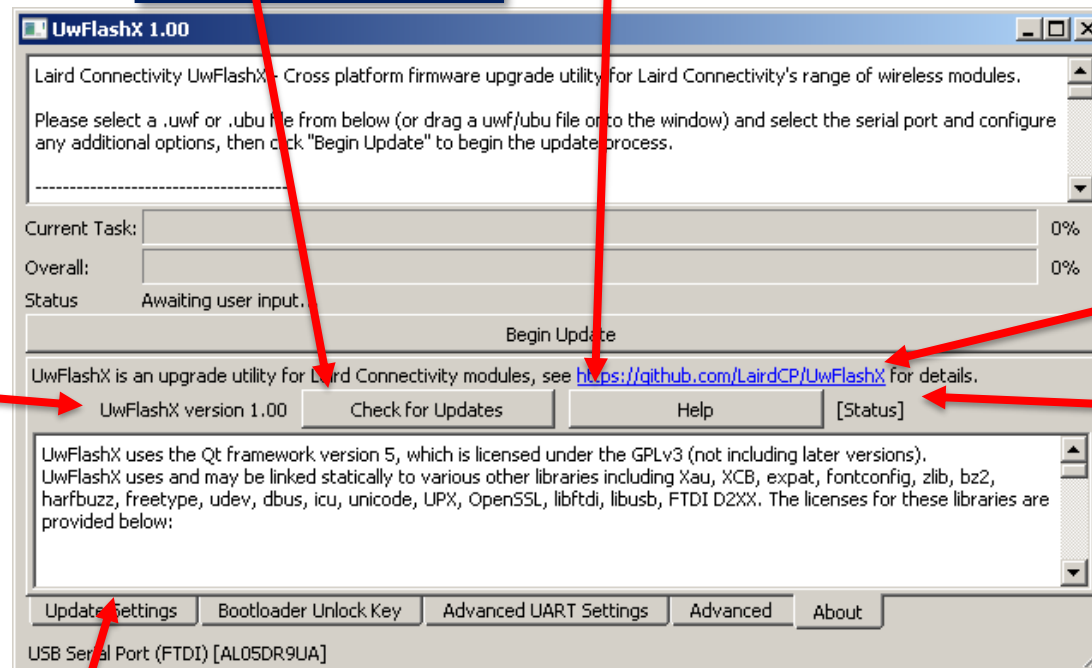

REVISION HISTORY

Version	Date	Notes	Approver
1.0	02 March 2020	Initial Release	Jamie Mccrae

© Copyright 2020 Laird Connectivity. All Rights Reserved. Patent pending. Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials or products rests with the end user since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property right.