E-01 AB-1 / HM-1 power distribution (single line)

51.2 V LFP 16S2P 210 Ah | all DC | wire sizes are copper, 105 C insulation | Agrobo rev A 2026-10-21

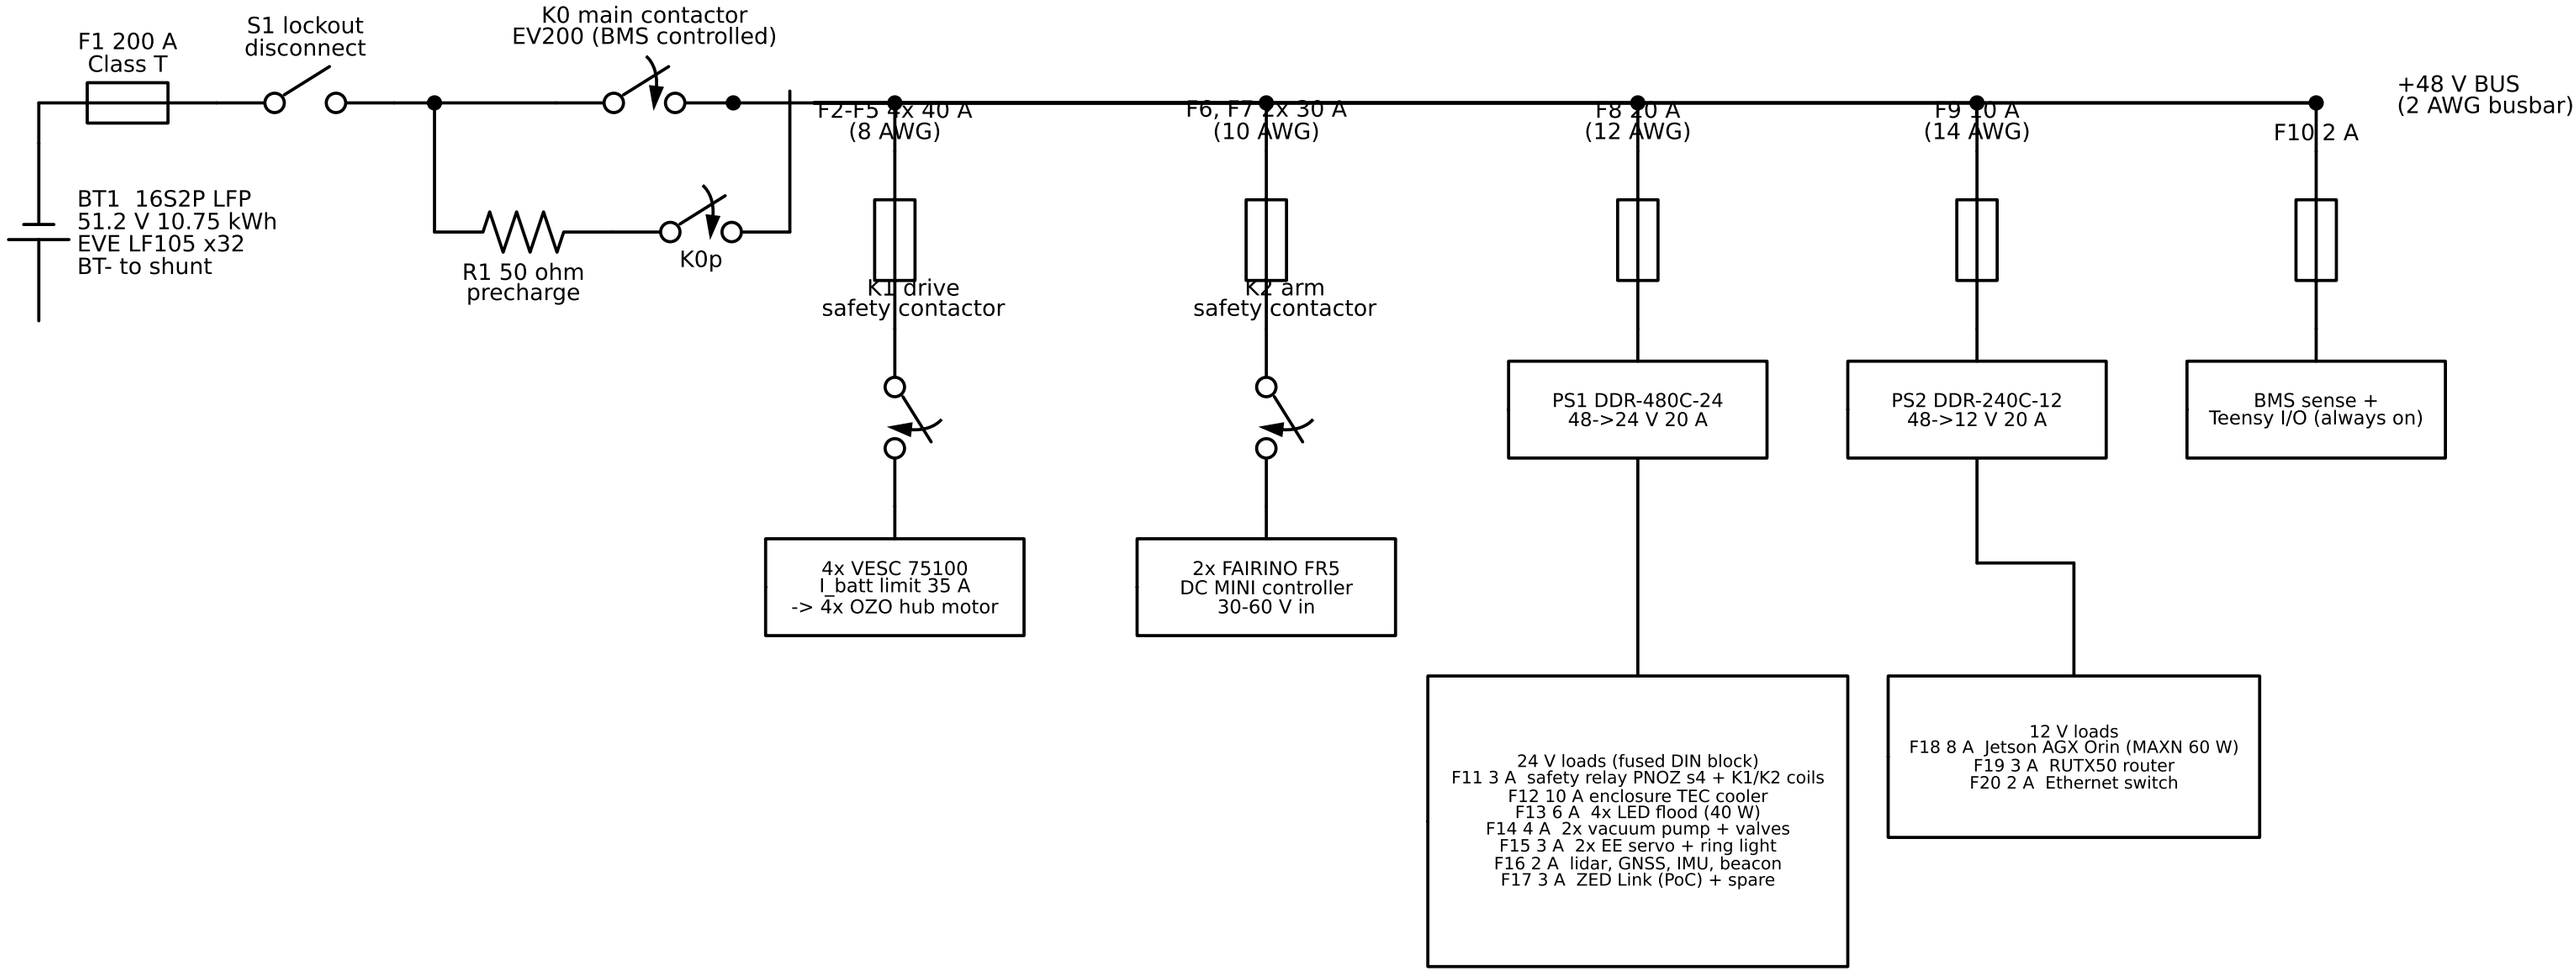

BT- via 500 A shunt (BMS current sense) to chassis-isolated return.
Charge: dock contacts J1 (+/-) -> F21 125 A -> K3 charge contactor (BMS) -> BUS.
Chassis bonded to BT- through 100 kohm + insulation monitor (IMD) input on BMS.