EXPERIMENT 10

Computer Networks Practical Record

Date: 24/8/26 | Reactor

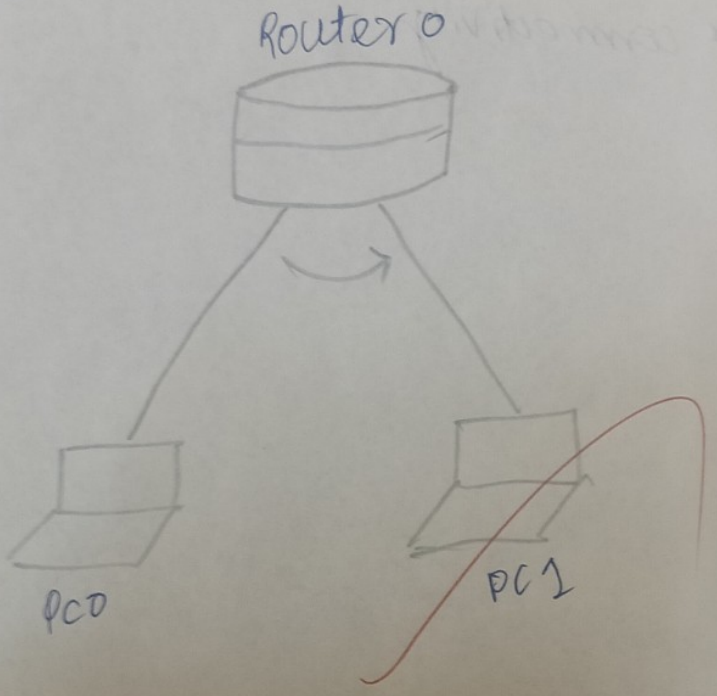
AIM:

To design and configuration a simple internetwork using a router and two in cisco packet tracer.

Step 1: configure Router

1) open cisco packets tracer
2) Select Router → Router
3) open C1 and press inter
4) Enter
   enable
   config
5) configure Fast Ethernet do:
   Interface ~~Fast~~ Ethernet 0/0:
   Ip address 192.168.10.1255.255.0
   No shut down
6) configure Fast Ethernet do;
   Interface FastEthernet 0/1
   Ip address 192.168.19.255.0
   No shut down

Step 2: configure PC0
   Go to PC0 → desktop → Ip configuration


Router 0
PC0
PC1

IP address : 192.168.10.2

Step3: Configure PC1

Clo to PC1 → desktop → IP configuration

IP address : 192.168.20.2

Submit mask : 255.255.255.0

Step4: Connect the devices.

uses copper straight → through cable

Pco Fast ethernet 0 → Router1 Fast

PC1 Fast Ethernet 0 → Router2

Fast Ethernet 0/2

Step5: Test connectivity

1) Select simulation mode

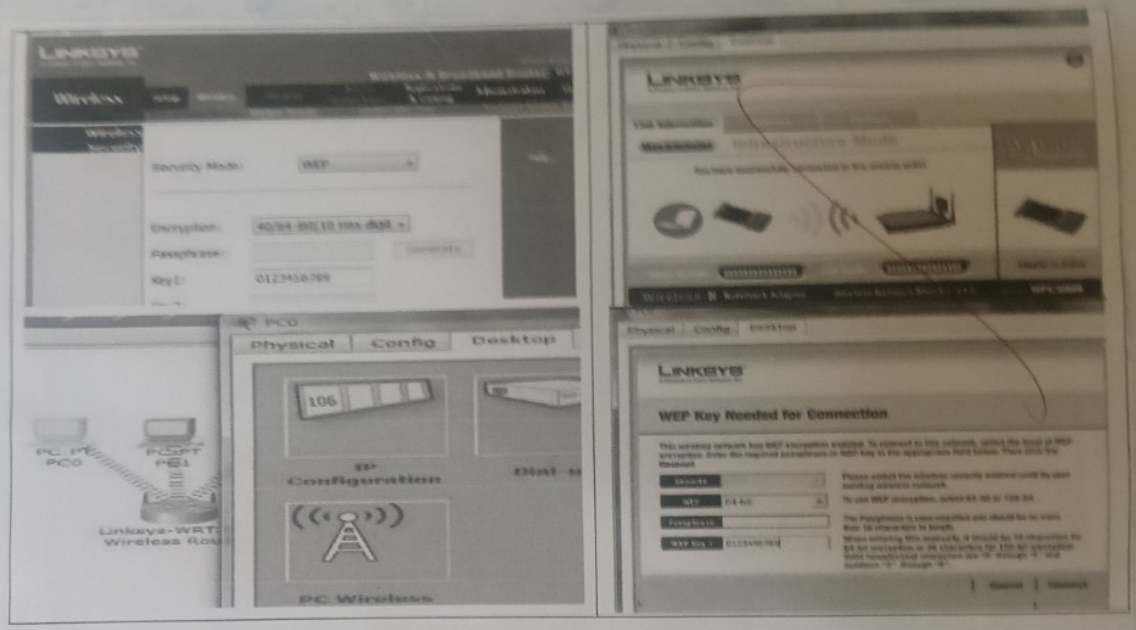
2) choose Add simple PDU

3) click PCO → PC1

4) If the PDU is successful, the two networks are communicating through the router

Result:

The internetworking was successfully designed and configured, and connectivity between PCo and PC1 was verified


LINKSYS
Security Mode:
WEP
Encryption:
Passphrase:
Key1:
0123456789
PC0
Physical
Config
Desktop
106
Configuration
PC Wireless
LINKSYS
Infrastructure Mode
Physical
Config
Desktop
LINKSYS
WEP Key Needed for Connection

Exp no: 10(b) | Wireless router, DHCP server and
Date: 30/8/24 | Internet cloud

AIM:

To design and configure and internetwork using a wireless router DHCP sources and ~~Ban~~ net verify connectivity

Step 1: Built the network

Add:

PL
Wireless Router
Laptop
cable Modem
Internet
cisco consoles

Step 2: connect Devices

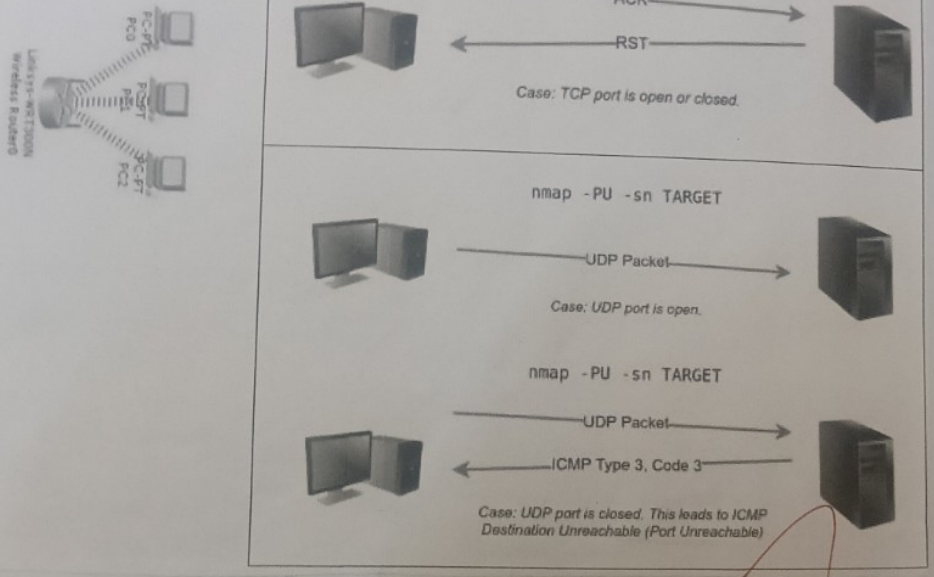
use the appropriated cable

PC → wirelessly router - cable Modem:
copper straight - through

wirelessly Router → cable modem
copper straight through

cable modem - Internet cloudd
coaxial cable

Internet cloud → also. com Server
copper straight → through



Exp no: 10(b)
Date: 30/8/24

AIM:
To desi
using a
and

Step1:
Add

Step2:

PC →
Copy

Step3: Configure wireless router

1) Open wireless Router CLI
2) Go to wireless
3) Set DNS servers as 208.220.200.22
4) Set save setting

Step4: Configure cisco.com server

DHCP

DHCP: ON

Pool name: DHCP pool

default Gateway: 208.67.220.220

Maximum users 50

Click add

Step:5: Test connectivity

1) Open PC → Desktop → command prompt
2) Type: Ipconfig/release
3) Then: Ipconfig/renew
4) Test the config server cisco.com

Result

The wireless interworking was successfully designed using a wirelessly router DHCP server and internet cloud and connectivity was verified using the Ping command