EXPERIMENT 11

Static Routing Configuration Using Cisco Packet Tracer

Expo: 11

Date: 30/3/26

a) simulate static routing protocal configure

AIM:

To simulate and configure static routing between multiple using cisco packet primary and backup static routers using administrative distance

Requirements:

cisco packets tracer

Three routers → Routers 1, 2

PC's two devices

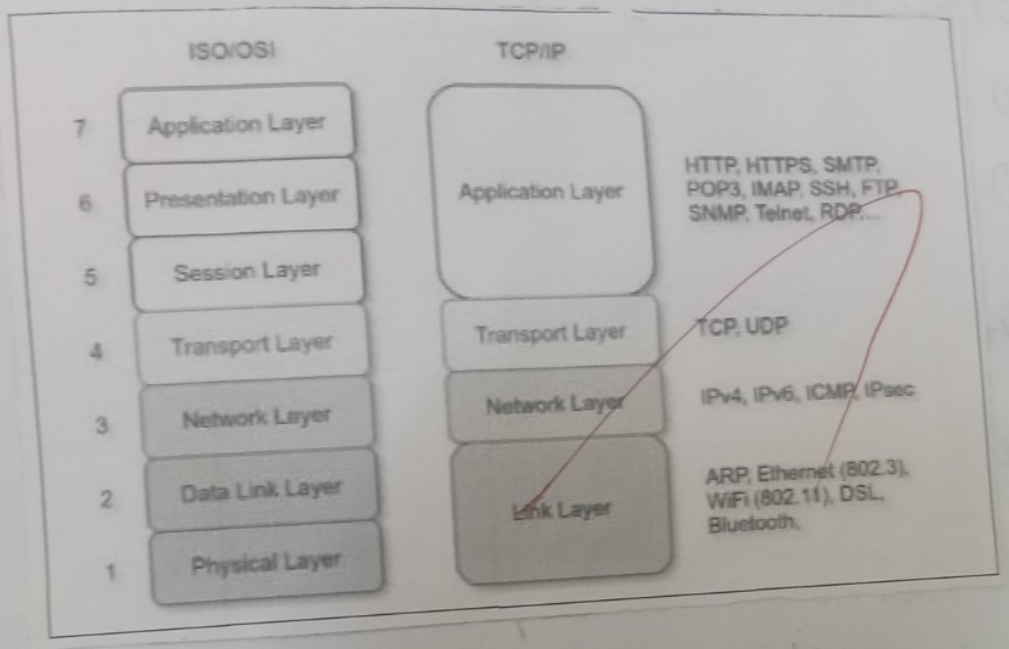
properly assigned IP address

Router 1:

Router 1 was static routes to the 10.00 to 4.00 networks the route through distance primary route the configuration was verified using show IP route.

Router 2:

was configured with static router to the 100 to 30.0.0. db networks the routing table and verified using


ISO/OSI
TCP/IP
7
Application Layer
6
Presentation Layer
5
Session Layer
4
Transport Layer
3
Network Layer
2
Data Link Layer
1
Physical Layer
Application Layer
Transport Layer
Network Layer
Link Layer
HTTP, HTTPS, SMTP, POP3, IMAP, SSH, FTP, SNMP, Telnet, RDP,...
TCP, UDP
IPv4, IPv6, ICMP, IPsec
ARP, Ethernet (802.3), WiFi (802.11), DSL, Bluetooth,

Backup route verification

The main link b/w routers q was disconnected to simulate a link failure connectivity was verified link q tracer

Verification:

Show q router static the routing tables showed the configured static routes q their administrative using the PEN commands

Results

Thus, static routing was successfully configured q simulated using cisco packet tracer

Bill 15/10