



ROUTER INITIAL CONFIGURATION:

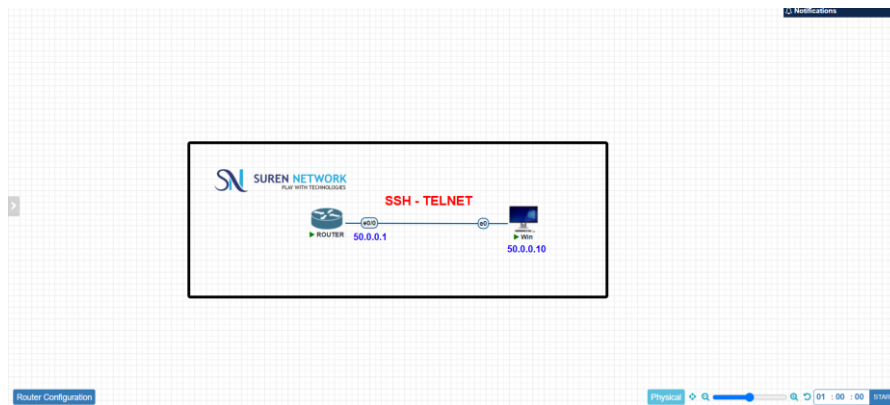


Step 1 : Assign ip address for Windows pc 50.0.0.10

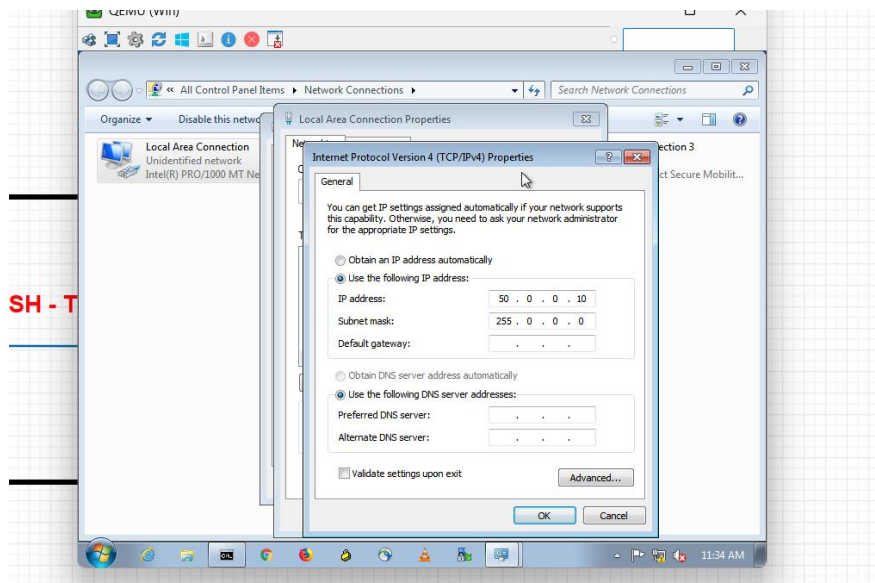


Step 2 : Assign ip address for router ethernet 0/0

```
ROUTER
3, changed state to down
ROUTER#config t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#
ROUTER(config)#exit
ROUTER#co
*Aug  6 11:53:53.341: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#config t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#interface ethernet 0/0
ROUTER(config-if)#ip add 50.0.0.1 255.0.0.0
ROUTER(config-if)#no shutdown
ROUTER(config-if)#exit
ROUTER(config)#
```


Step 3 : Tested the connectivity between the PC and the router. Both devices responded successfully to ping requests.

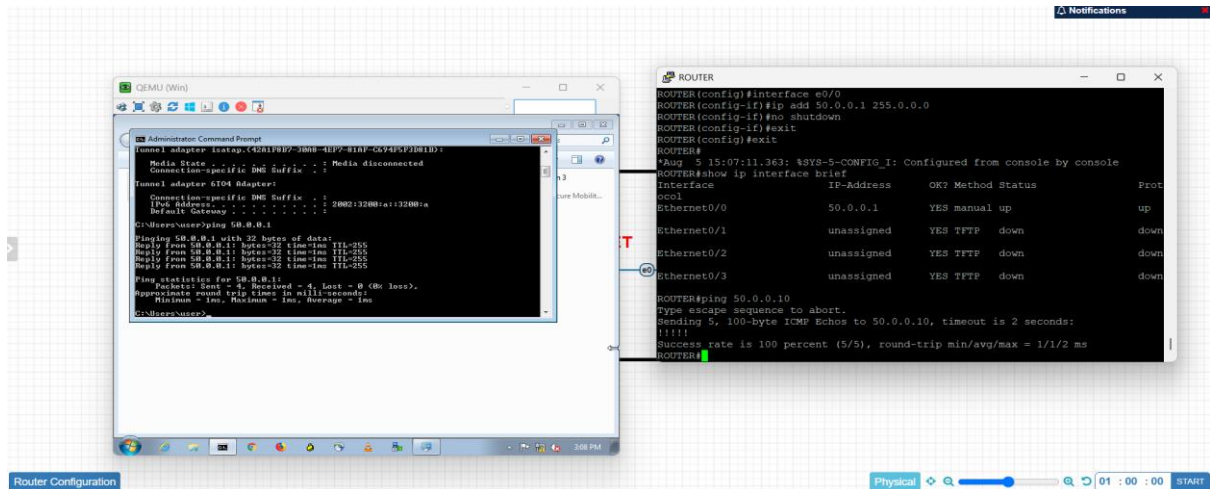

Step 3: Create console authentication for asking username and password.

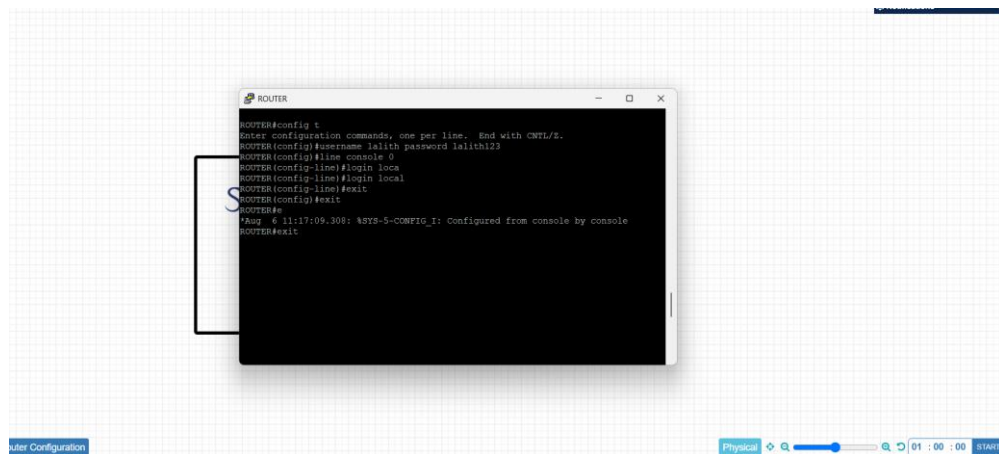

Step 4: created console authentication for asking password only.

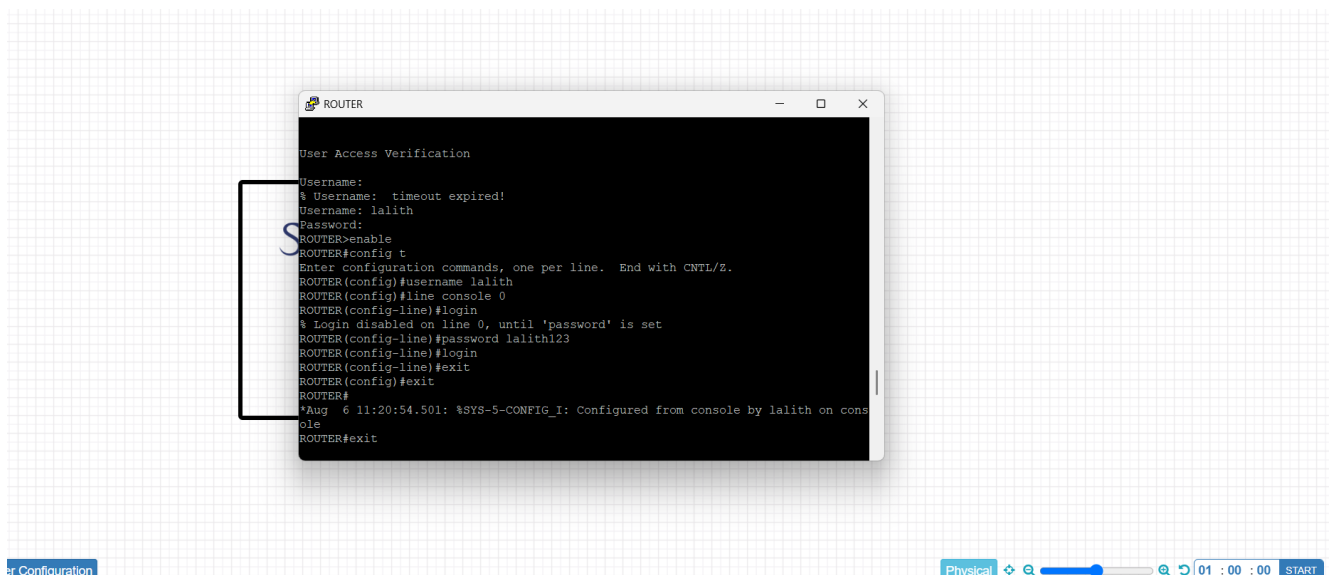

Step 5: Configured Telnet access on the router and verified remote connectivity by connecting from a Windows PC using the PuTTY application and the router's IP address.

