


Measurement: Gain / Phase

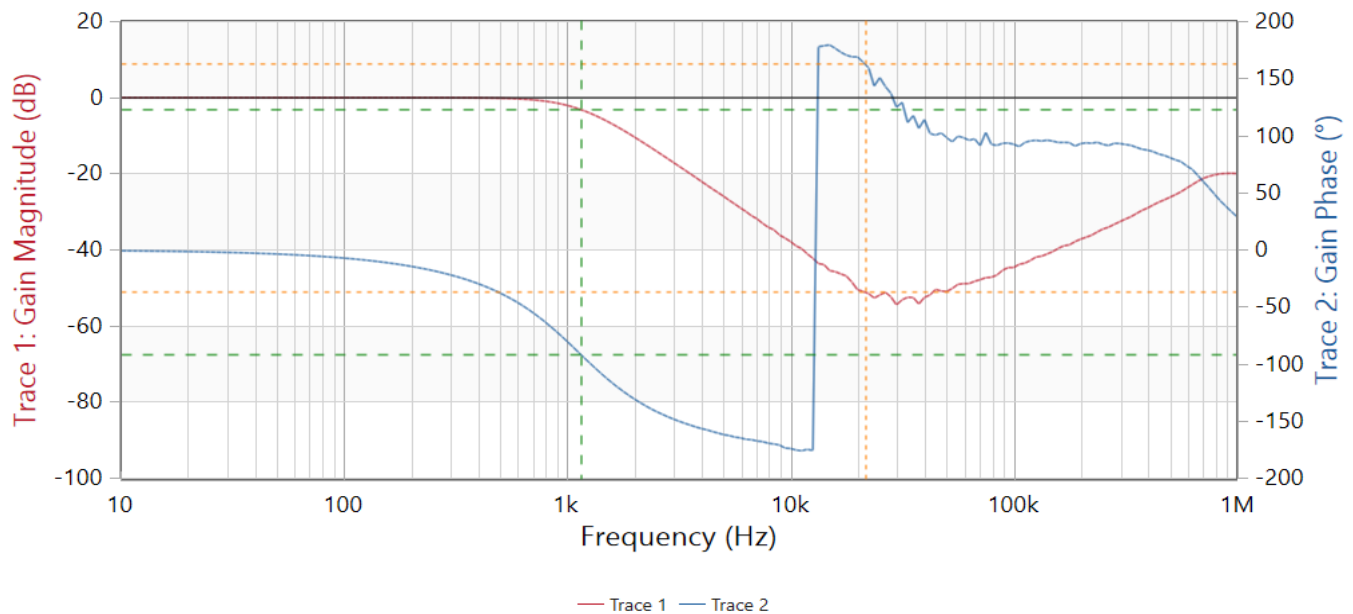

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	1,152 kHz	21,544 kHz	20,393 kHz
Trace 1	Magnitude (dB)	Magnitude (dB)	Magnitude (dB)
Measurement	-3,146 dB	-51,086 dB	-47,94 dB
Trace 2	Phase (°)	Phase (°)	Phase (°)
Measurement	-91,865 °	162,877 °	254,742 °

Sweep	
Start frequency:	10 Hz
Stop frequency:	1 MHz
Center frequency:	500,005 kHz
Span:	999,99 kHz
Sweep mode:	Logarithmic
Numer of points:	201

Hardware setup	
Device type:	Bode100R1
Serial number:	LM472C
Receiver bandwidth:	1 kHz
Output level:	0 dBm
DUT settling time:	0 ms

Calibration	Full-Range	User-Range
Gain	-	-
Termination	Channel 1	Channel 2
Gain	1 MΩ	1 MΩ
Attenuator setting	Channel 1	Channel 2
Transmission	20 dB	20 dB