



uint16_t values[5] = { 7, 39, 12, 72, 50 };

d	Hex	≡ Octett	
7	0x7	0000 0111 _{msb} 1 _{lsb}	<u>00</u> <u>07</u> B ₁ B ₀
39	0x27		<u>07</u> <u>00</u> B ₀ B ₁
12	0xC		
72	0x48		
50	0x32		

Byte Order
 ↳ Big Endian
 ↳ Little Endian

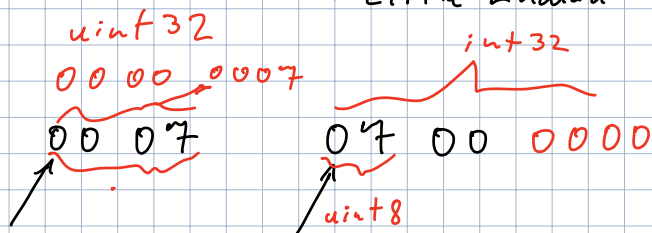


uint16_t values[5] = { 7, 39, 12, 72, 50 };

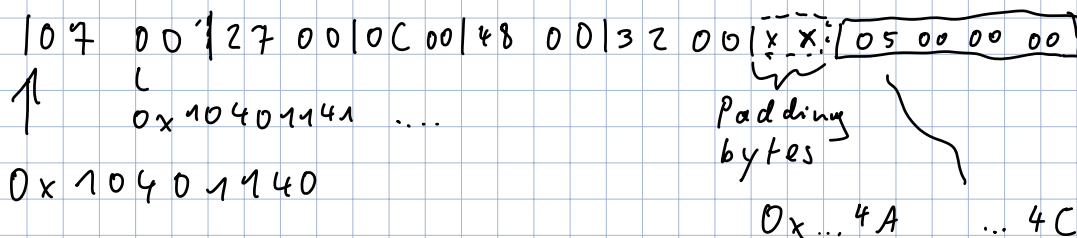


uint32_t count = 5;

Alignment (32bit)

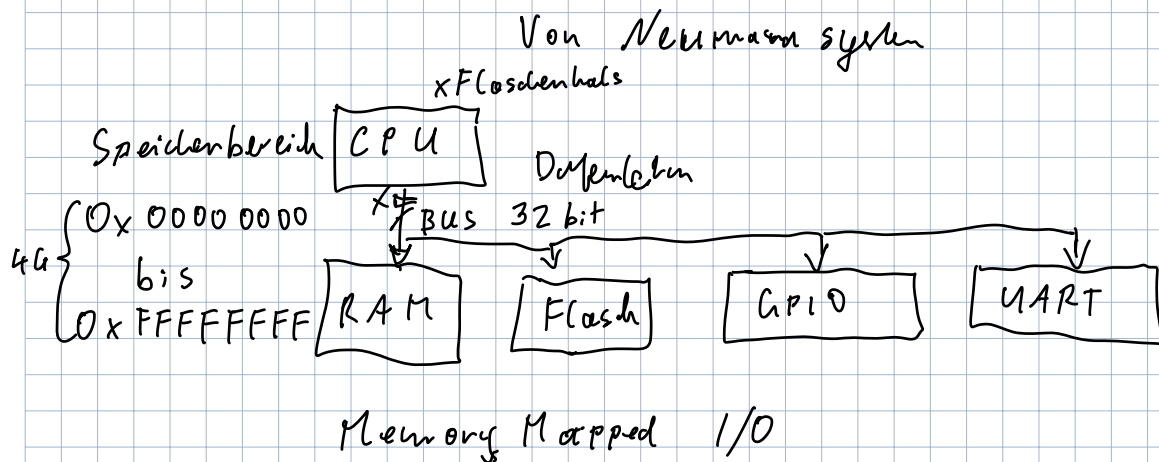

uint 16_t * pAdr =



uint 32_t * pCount = &count;

printf("0x %p:%d\n"), pCount, *pCount);

↳ 0x 1040 114C: 5