



SOLAR ENERGY HARVESTER / SUPERCAP STORAGE / 3V3 SYSTEM RAIL

ESP32-C3 MCU / UART PROGRAMMING HEADER

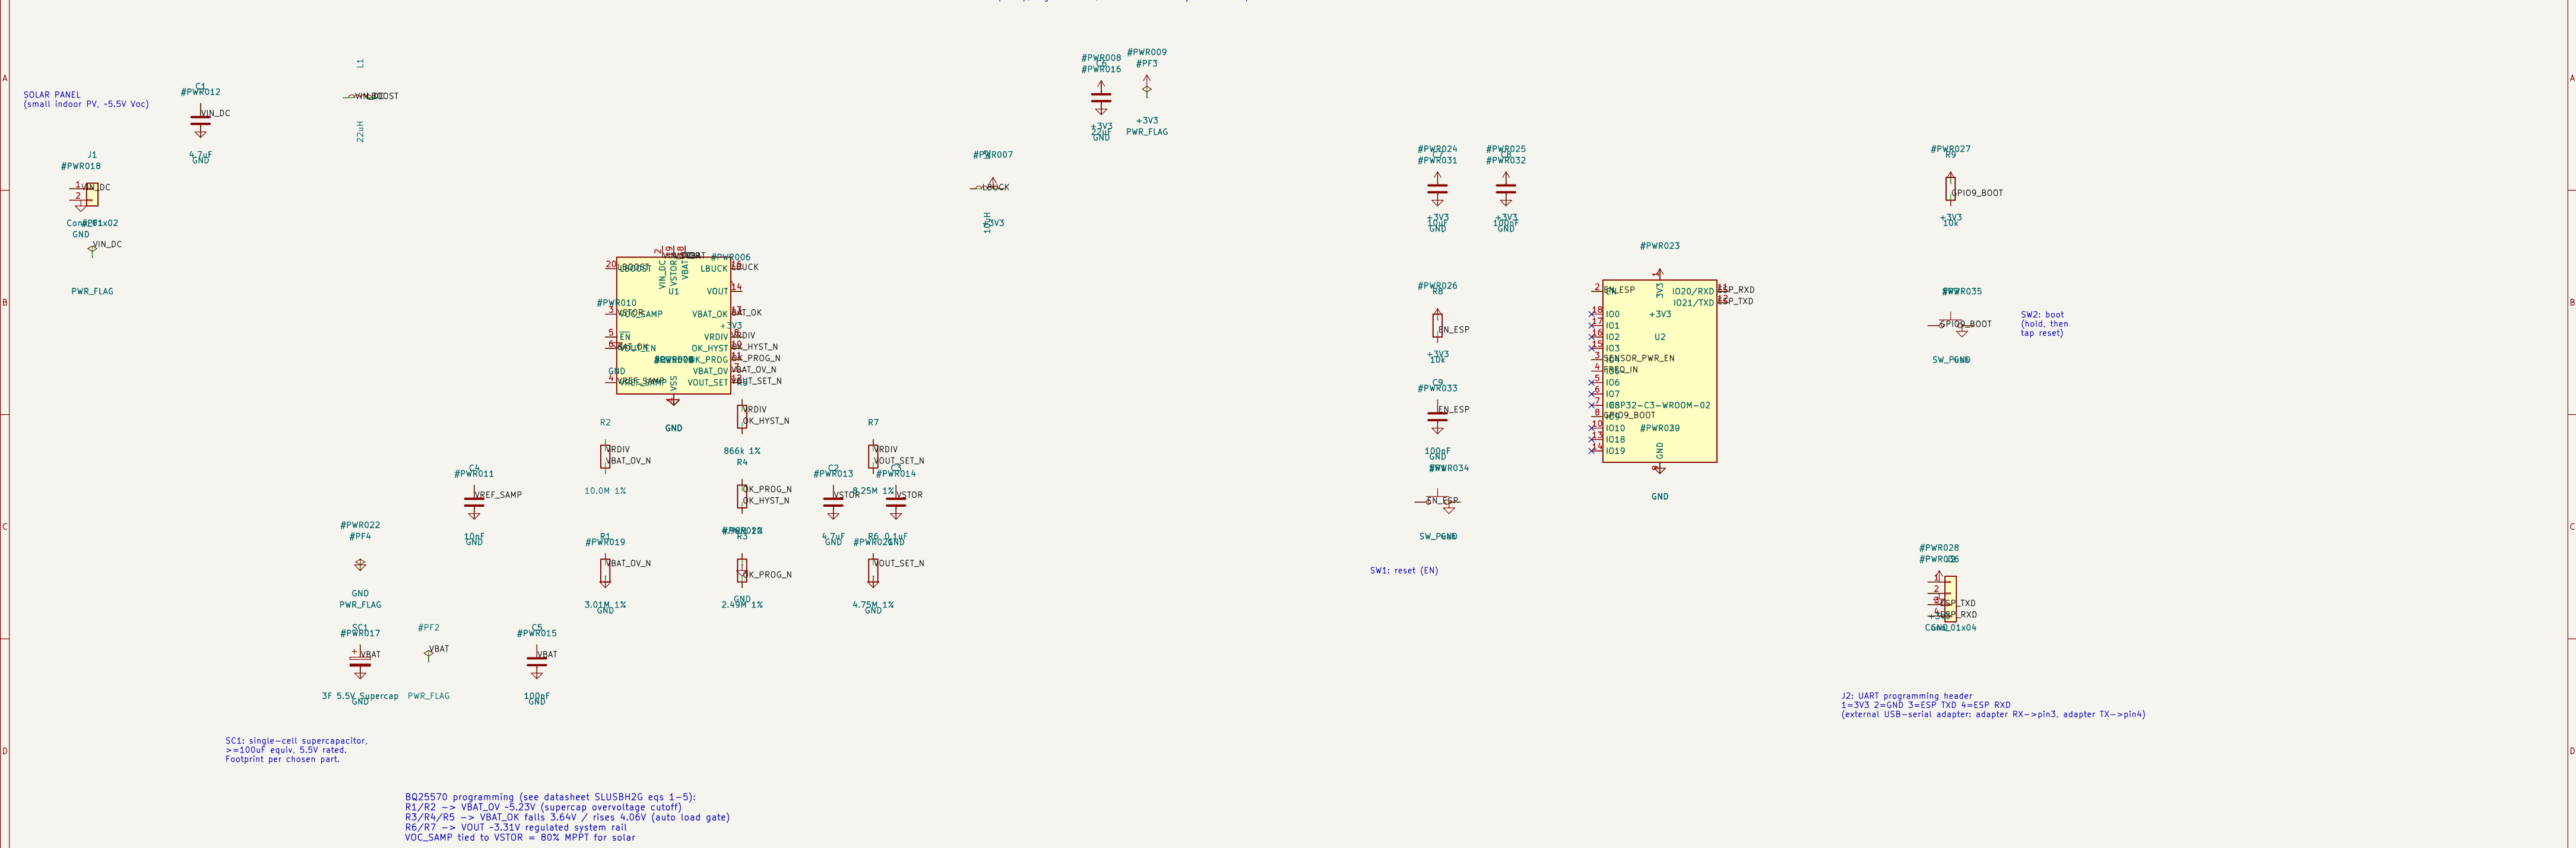

CAPACITIVE PROBE OSCILLATOR (power-gated by MCU)

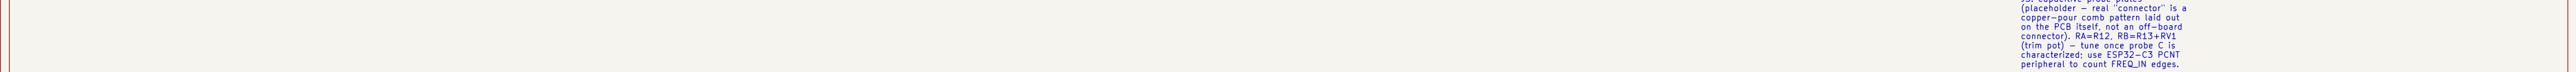

J3: capacitive probe plates (placeholder - real "connector" is a copper-pour comb pattern laid out on the PCB itself, not an off-board connector). RA=R12, RB=R13+RV1 (trim pot) - tune once probe C is characterized: use ESP32-C3 PCNT peripheral to count FREQ_IN edges.

