ASTRELIGHTS INC

LED Panel Frame Light

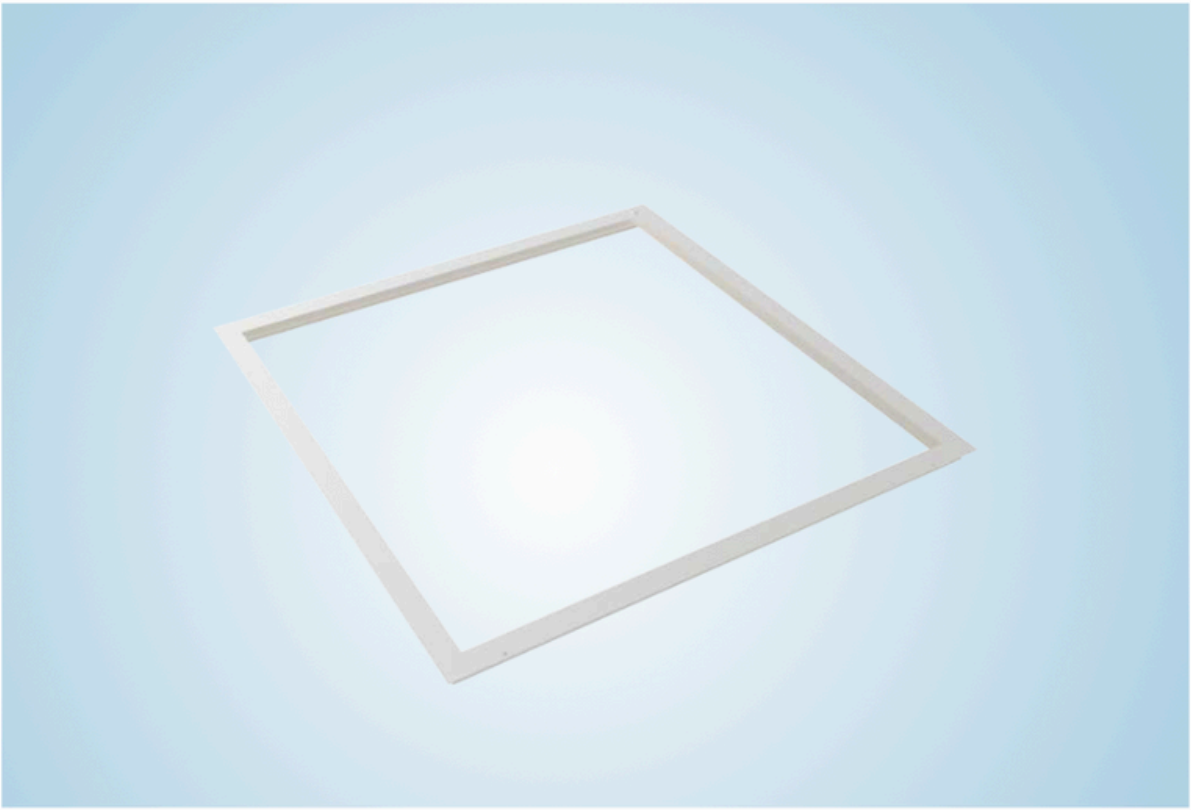

Ra>80 PF>0.9 5 Years warranty

Intertek 5000444

ASTRELIGHTS INC

Product Features

1. The Frame light is mainly used in commercial lighting places, such as office, supermarket and so on.
2. The Frame light has uniform and soft luminance, high luminous efficacy, saving energy and protecting environment.
3. Using high quality material, with great heat dissipation and low light degradation.
4. Using high quality driver, efficiency>90%, PF>0.9.
5. Lifespan>50,000 hours.
6. 0-10V dimming function dimming driver.
7. Dustproof: Zero distance between back cover and the frame protect against dust perfectly.
8. No yellowing problem of Light Guided Plate for this Frame light.
9. CCT Adjustable range: 3500K-4000K-5000K or 3500K-4000K-5000K-5700K-6500K
10. Power Adjustable range.

Specification

Product Model	Power	Working Current	Input Voltage	Luminous Efficacy	CCT	Viewing Angle	Ra	Dimmable	Warranty
FL22-40W-S5-TCP	20/25/30/35/40W	0.36A	AC120-277V	110LM/W	3500K/ 4000K/ 5000K/ 5700K 6500K	120°	≥80	0-10V	5 years
FL24-55W-S5-TCP	20/30/40/50/55W	0.458A							

ASTRELIGHTS INC

Product Dimmension

2X2

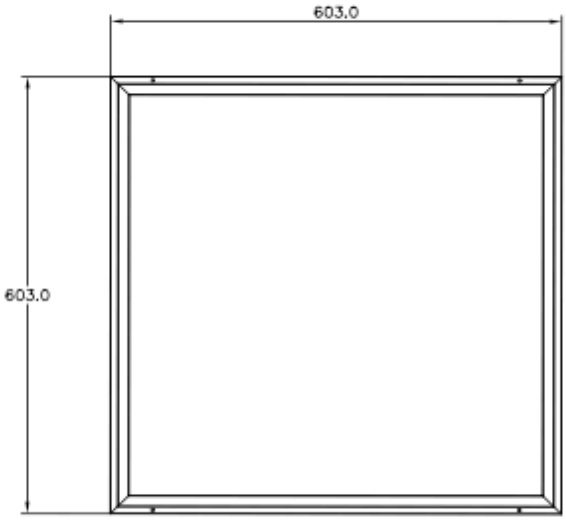

2X4

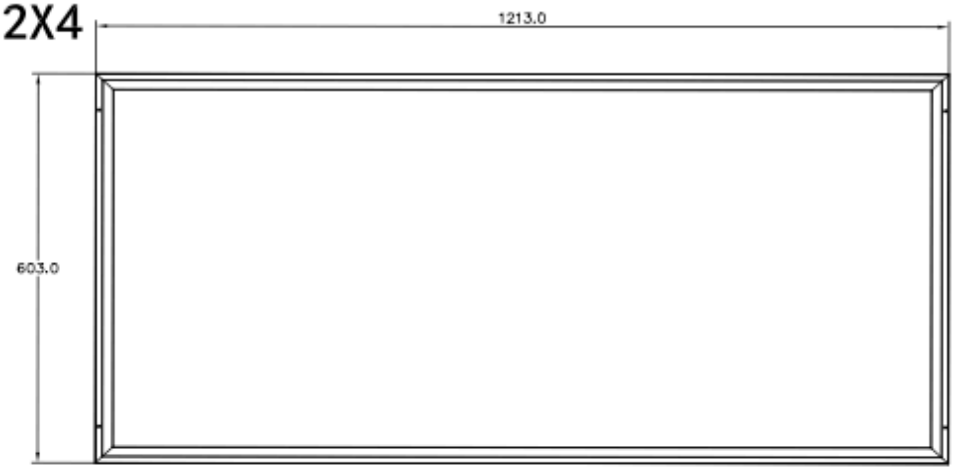

ASTRELIGHTS INC

Applications

Warning

- Make sure the distances between live part and metal part of LED Frame can satisfy reinforced or double insulation.
- The luminaire should only be installed by a qualified electrician.
- Before installation and maintenance of the LED Frame, please disconnect the power to prevent electric shock.
- Before installation and maintenance, LED Frame must be operated by professional and technical personnel, non-professionals do not to remove the light.
- The LED Frame must be installed in an appropriate environment to work. In harsh environments may shorten the life or even damage the light.
- For type Y attachments:If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.