T8 Double Roll LED Tube Light

Features

-Warranty: 5-year limited warranty.
-Flicker free, eyesight protection.
-Efficiency:130Lm/W
-Driver end-cap, easy replacing
-Input voltage: 100-277V
-Certificated: ETL/DLC
-Instant on/off, no noise/UV/shadow

LED | <1sec | >40000 | 50000h | 5 YEAR Replacement Warranty | 120°

Super bright LED tube light is with SMD2835, which has higher lumen efficiency and perfect lighting performance.
With flicker free driver, instant start, no radiation, no noise, no mercury and other material that is harmful to human body and environment.

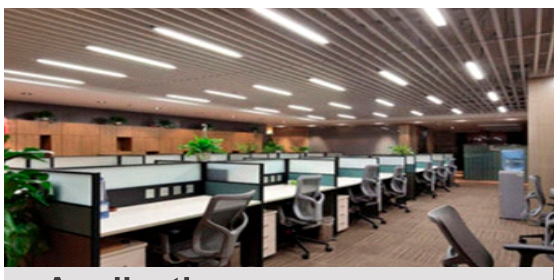

Applications:

- Office lighting.
- meeting room lighting.
- hall lighting.
- hotel lighting.
- super-market.

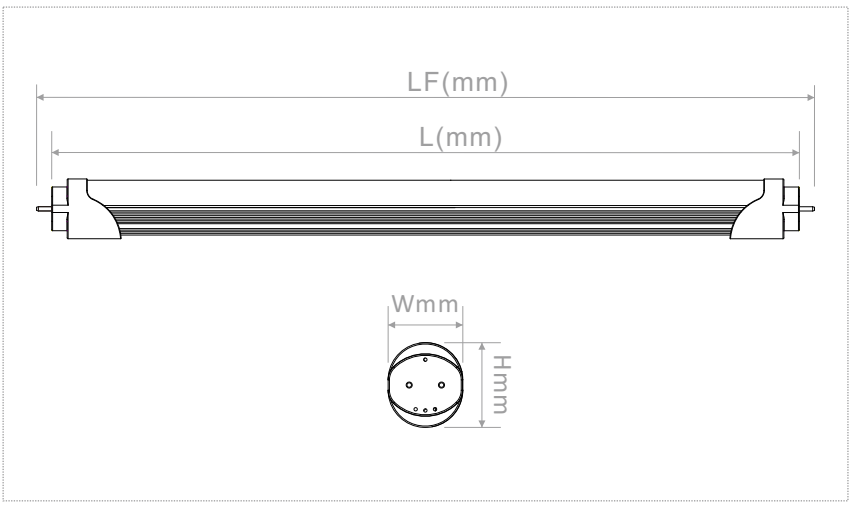

Model No	T8-ER060B-F15W-B	T8-ER090B-F20W-B	T8-ER120B-F22W-B	T8-ER150B-F35W-B	T8-ER180B-F40W-B	T8-ER240B-F50W-B
Watt(W)	15W	20W	22W	35W	40W	50W
Input Voltage(V)	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz	AC100-277V 50/60Hz
Dimensinon (mm)	L603±1mm	L909±1mm	L1213±1mm	L1513±1mm	L1778±1mm	L2389±1mm
LED Model	144pcs SMD2835	192pcs SMD2835	288pcs SMD2835	336pcs SMD2835	384pcs SMD2835	576pcs SMD2835
CCT(K)	6500K	6500K	6500K	6500K	6500K	6500K
Efficiency(lm/W)±5%	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	140lm/W
Luminous Flux(lm)±5%	1950lm	2600lm	3080lm	4550lm	5200lm	7000lm
Beam Angle(°)	120°	120°	120°	120°	120°	120°
Protection Class	Class II	Class II	Class II	Class II	Class II	Class II
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
Working Temp(℃)	-15℃~+45℃	-15℃~+45℃	-15℃~+45℃	-15℃~+45℃	-15℃~+45℃	-15℃~+45℃
Lifetime(hour)	>50000H	>50000H	>50000H	>50000H	>50000H	>50000H
THD	<15%	<15%	<15%	<15%	<15%	<15%
Socket	G13	G13	G13	G13	G13	FA8/R17D
Size(LF*L*W*H)mm	603*588*28*32mm	909*894*28*32mm	1213*1198*28*32mm	1513*1498*28*32mm	1778*1764*28*32mm	2389*2375*28*32mm

Available size

Model	Dimension(mm)	Wattage	Option		Carton weight (LBS)		Carton Size (in)	Qty/CTN	20GP (pcs)	40HQ (pcs)
			PC	Color	N.W/CTN	G.W/CTN				
T8-ER060B-F15W-B	LF603*W28*H32	15W	Clear	6500K	12	14.5	25X14.2X7.5	50	29500	77900
T8-ER090B-F20W-B	LF909*W28*H32	20W	Clear	6500K	9	11	35X14.2X7.5	50	20000	52900
T8-ER120B-F22W-B	LF1213*W28*H32	22W	Clear	6500K	12	14.5	49.2X7.48X7.67	25	14300	40025
T8-ER150B-F35W-B	LF1513*W28*H32	35W	Clear	6500K	15	18.3	61.2X7.2X7.28	25	12800	31800
T8-ER180B-F40W-B	LF1778*W28*H32	40W	Clear	6500K	18	22	71.6X7.2X7.28	25	10950	27175
T8-ER240B-F50W-B	LF2389*W28*H32	50W	Clear	6500K	22	28	95.5X7.2X7.28	25	8200	20475

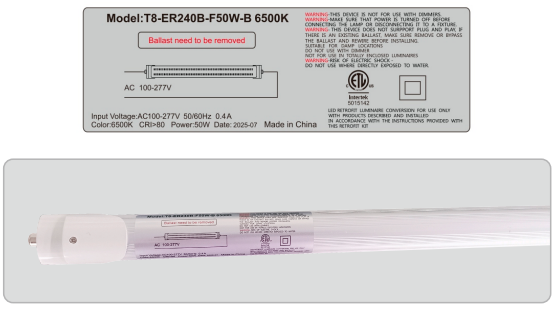

product label

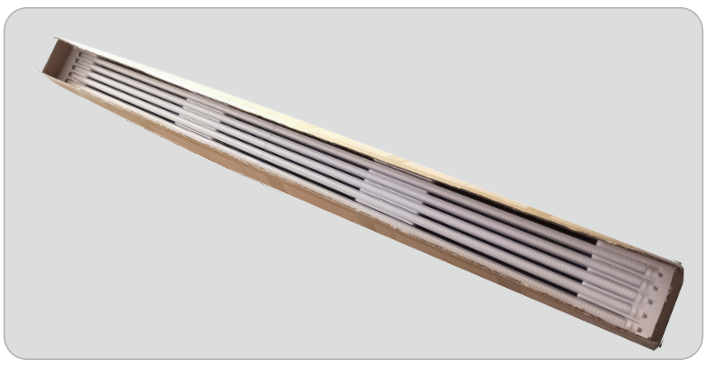

packaging