Lamily Corp

FIELD ADUSTABLE LED FLOOD LIGHTS

CCT & WATTAGE SELECTABLE

15W

30W

60W

100W

150W

5 YEARS WARRANTY

COLOR SELECT

APPLICATION

FIELD ADUSTABLE LED FLOOD LIGHTS

CCT & WATTAGE SELECTABLE

GENERAL FEATURES

- Corrosion resistant die cast aluminum housing
- 3000K/4000K/5000K CCT selectable
- 150-120-90W selectable, 100-80-60W selectable, 60-50-40W selectable, 30-24-18W selectable, 15-12-9W selectable.
- 120-277VAC, 0-10V Dimming
- On/off photocell comes standard on all models
- Available with black, bronze, white finish color
- Mount: 1/2" knuckle or bracket mount
- 50,000+ Hour LED life expectancy
- IP65 rated, for wet location
- 5 years warranty

DIMENSIONS

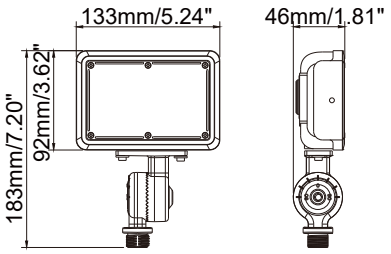

15W

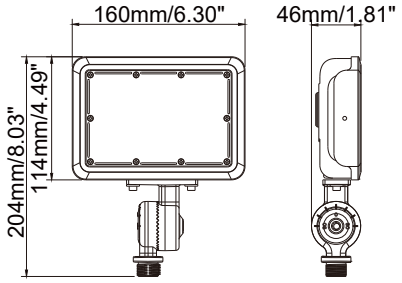

30W

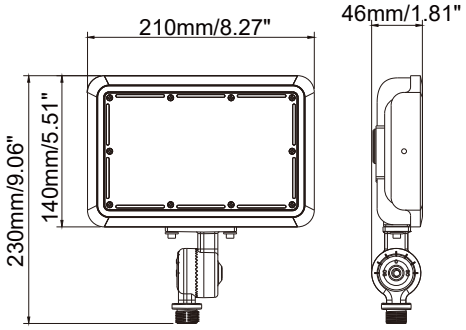

60W

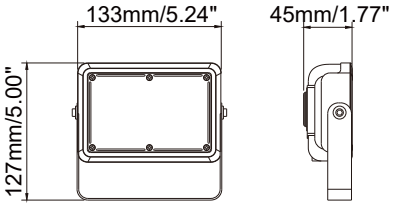

15W

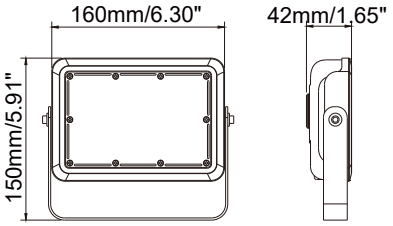

30W

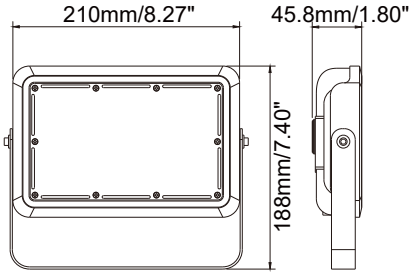

60W

FIELD ADUSTABLE LED FLOOD LIGHTS

CCT & WATTAGE SELECTABLE

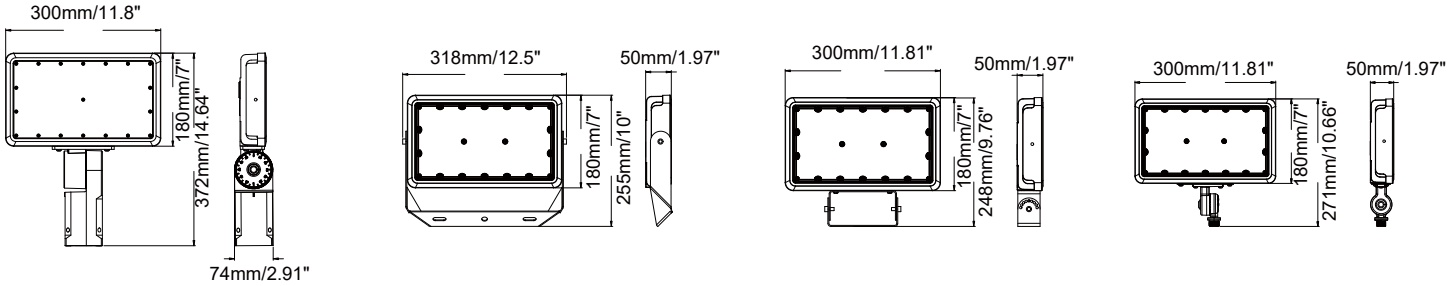

100W

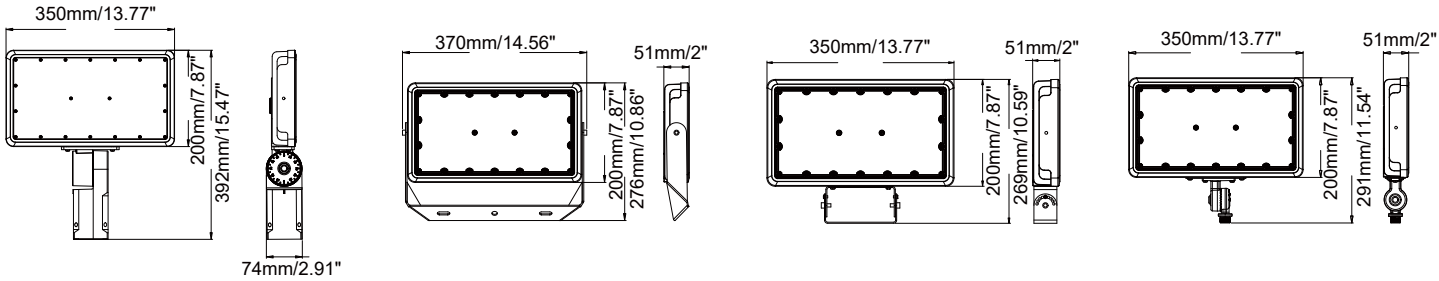

150W

ELECTRICAL SPECIFICATIONS

Static CCT & Wattage

Model #	Watt	LPW	Lumen	CCT	Volt	CRI	Bean Angle
BWFL3-15W-XXXX	15-12-9W	130lm/W	1950-1560-1170lm	3K/4K/5K Selectable	120-277V	>70	7H6V
BWFL3-30W-XXXX	30-24-18W	130lm/W	3900-3120-2340lm	3K/4K/5K Selectable	120-277V	>70	7H6V

CCT & Wattage Selectable

Model #	Watt	LPW	Lumen	CCT	Volt	CRI	Bean Angle
BWFL3-60/50/40W-XXXX	60-50-40W	130lm/W	7800-6500-5200lm	3K/4K/5K Selectable	120-277V	>70	7H6V
BWFL3-100/80/60W-XXXX	100-80-60W	140lm/W	14000-11200-8400lm	3K/4K/5K Selectable	120-277V	>70	7H6V
BWFL3-150/120/90W-XXXX	150-120-90W	140lm/W	21000-16800-12600lm	3K/4K/5K Selectable	120-277V	>70	7H6V

FIELD ADUSTABLE LED FLOOD LIGHTS

CCT & WATTAGE SELECTABLE

CATALOG NUMBER BREAKDOWN

BWFL3-60/50/40W-XXXX

❶ ❷ ❸ ❹ ❺ ❻ ❼

❶ Bestwon Lighting
❷ Flood Light
❸ Wattage
❹ CCT
❺ Arm Options
❻ Color
❼ Internal Code

❸ Wattage

15	15-12-9W
30	30-24-18W
60	60-50-40W
100	100-80-60W
150	150-120-90W

❹ CCT

30	3000K
40	4000K
50	5000K
CS	3000K 4000K 5000K Color Select

❺ Arm Options

K	Knuckle
T	Trunion
KT	both Knuckle and Trunion included

❻ Color

W	White
BR	Bronze
BL	Black

❼ Internal Code

X	Any Letter or Digital Number
Blank	Blank