Lamily Corp

5-POWER & 6-CCT SELECTABLE
BACKLIT LED PANEL

120~277V | 0~10V Dimming | 50,000Hrs | 6CCT Select | CCT FIELD ADJ. | WATT FIELD ADJ.

Product Features

- Backlit technology that offers even lighting distribution without shadowing.
- Wattage/CCT selectable versions: 5 different lumen outputs and 6 CCT in the same product.
- Emergency battery back-up unit.
- The range input voltage 120-277V.
- Up to 125 lumens per watt - CRI >80

Areas of application

The Backlit Panels are the high efficiency solution for offices, schools, hospitality and retail areas.

Accessories

1

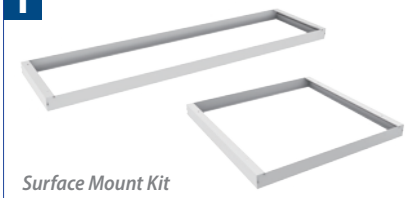

Surface Mount Kit



1X4FT 1228x312x50mm/48.35"x12.28"x1.97"
2X4FT 1222x618x50mm/48.11"x24.33"x1.97"
2X2FT 618x612x50mm/24.33"x 24.09"x1.97"

2



Flange Kit



1X4FT 1252x342x28mm/49.29"x 3.46"x1.10"
2X4FT 1252 x 642x28mm/49.29"x25.28"x1.10"
2X2FT 642x642x28mm/25.28"x25.28"x1.10"

3

8W / 15W Emergency Power Supply

4

Suspension Installation

5

Bluetooth / PIR Motion Sensor

6

Junction Box

Sensor Installation (SR)

Sensor Installation (SR2)

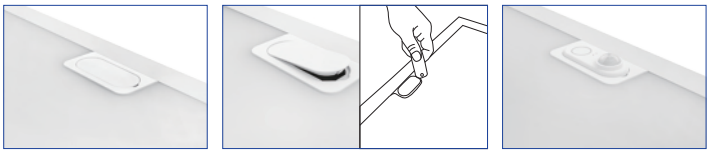

Sensor Installation (SR3)

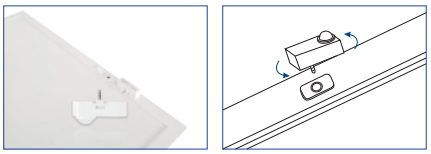

Dimension

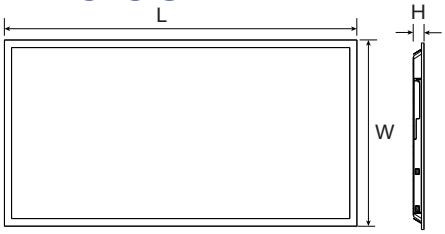

	L x W x H
1x4FT	1214 x 304 x 34mm / 47.80" x 11.97" x 1.34"
2x2FT	604 x 604 x 33mm / 23.78" x 23.78" x 1.30"
2x4FT	1214 x 604 x 33mm / 47.81" x 23.78" x 1.30"

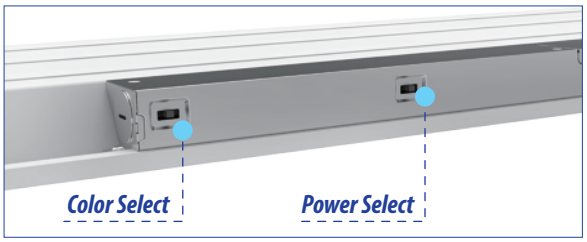

Specification

Model	Size	Wattage	Input Voltage	CCT	Efficiency	Dimming	PF	Ra	THD	Emergency	Sensor Function	Operating Temp.	Lifetime	Safety
ALI-BPL-1X4-15/20/30/40/50W-6CCT-S1	2X2Ft	15-20-30-40-50W (Select)	120-277V (50/60Hz)	30-35-40-50-57-65K (Select)	125lm/W	0-10V (0-100%)	≥0.9	>80	<20%	8W/15W optional	Optional	-20℃to+50℃	50,000Hrs	ETL
ALI-BPL-2X2-15/20/30/40/50W-6CCT-S1	1X4Ft	15-20-30-40-50W (Select)												
ALI-BPL-2X4-20/30/40/50/75W-6CCT-S1	2X4Ft	20-30-40-50-75W (Select)										-20℃to+45℃		

Packing Information

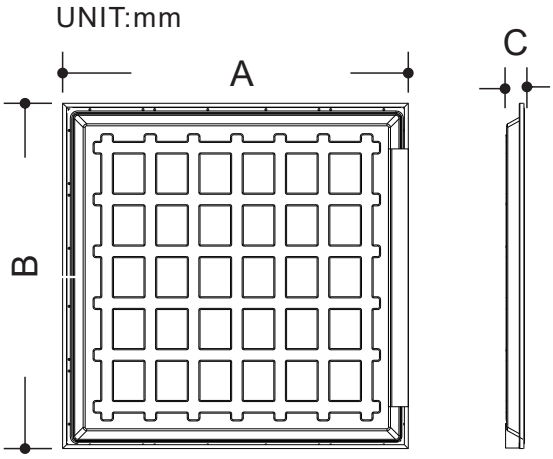

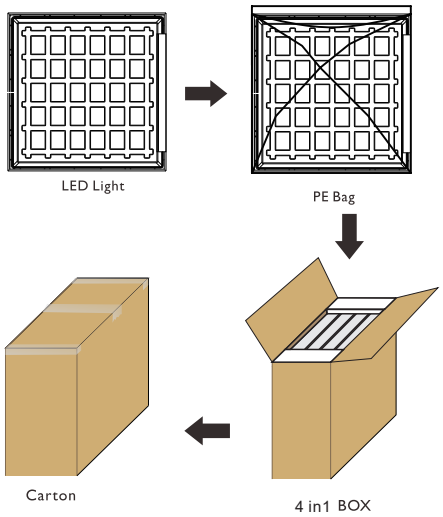

Dimension	*(1X4FT) 1214x304x34mm/47.80"x11.97" x1.34"*	*(2X2FT) 604x604x33mm/23.78"x23.78" x1.30"*	*(2X4FT) 1214x604x33mm/47.81"x23.78"x1.30"*
Carton Box	*1255 x 162 x 358mm / 49.41" x 6.38" x 14.09"*	*645 x 162 x 658mm / 25.39" x 6.38" x 25.91"*	*1255 x 162 x 658mm / 49.41" x 6.38" x 25.91"*
Gross Weight	*9.07kg / 20 lbs*	*8.62kg / 19 lbs*	*15.88kg / 35 lbs*

Order Information

Example: ALI-BPL-1X4-15/20/30/40/50W-6CCT-S1

ALI	***BPL***	***1X4***	***15/20/30/40/50W***
ALI=ASTRELIGHTS INC	*BPL=Back-lit Panel Light*	*1X4=1X4 ft* *2X2=2X2 ft* *2X4=2X4 ft*	*15/20/30/40/50W=15-20-30-40-50W Adjustable* *20/30/40/50/75W=20-30-40-50-75W Adjustable*

6CCT	***S1***
6CCT=30-35-40-50-57-65K Adjustable	*S1=Sensor Available*