Lamily Corp

ETL Recessed Round Pane Light

BQ-YPL-U120-9-T-CCT

BQ-YPL-U175-12-T-CCT

Introduction

CCT Switch Back lighting LED Panel Ligh can choose between 3000K-6500K color temperature values of 3000K/3500K/4000K/5000K/6500K, which is convenient for consumers to choose the color temperature value they like.

The product has high luminous efficiency, lighter weight, long life, environmental protection and no pollution.

This is our private mode product whose frame, electric wire and driver box are all developed by our company.

We have TRIAC dimmable driver that is compatible with LEVITON and Lutron dimmer .

Features

- Ultra-thin 11mm.
- 5 color temperature switching
- Instant on/off, no noise/UV/light leak/shadow
- Frameless design 120 degree beam angle.
- Support SCR dimming
- Certified : ETL

Application Areas

Office & school lighting: office room, meeting room, class room etc.
Commercial lighting: shoppingmall, super market, retailer shops etc.
Home lighting: Balcony, Bathroom, Restaurant,Kitchen, Corridor etc.

Product Image

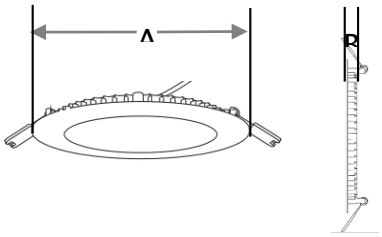

CCT Switc | DIMMABLE TRIAC | Intertek | 120° | PF 0.9 | CRI≥80 | HOURS 50000

Measurement

Model	Dimension(mm)		Cut Size (mm)	Product Weight (Kg)		Package weight (Kg)		Carton Size (mm)	Qty/CTN	20GP (pcs)	40HQ (pcs)
	A	B		N.W/PC	G.W/PC	N.W/CTN	G.W/CTN				
BQ-YPL-U120-9-T-CCT	Φ120*11		Φ105	0.22	0.27	13	14.5	580*270*320	40	25000	6000
BQ-YPL-U175-12-T-CCT	Φ175*11		Φ165	0.32	0.4	12	13.8	590*320*370	30	1000	3200

Technical Data Sheet

Model No.	BQ-YPL-U120-9-T-CCT	BQ-YPL-U175-12-T-CCT
Watt(W)	9W	12W
Dimension(mm)	Φ120*11mm	Φ175*11mm
Input Voltage(V)	100-130V	
LED Model	SMD 2835, 0.2W,27-29lm	
LED Qty(PCS)	27*2pcs	36*2pcs
SDCM	/	
CCT(K)	3000K/3500K/4000K/5000K/6500K (CCT Switch)	
Efficiency (lm/W) ±5%	80lm/W	80lm/W
Luminous Flux(lm) ±5%	750	1000
CRI	≥80	
Beam Angle (°)	120°	
LED Driver	US standard power supply (Compatible with Infineon / Lutron dimmers)	
DIM	SCR Dimming	
Protection Class	/	
IP Rating	IP20	
Material	Aluminum+PMMA+PS	
Lifetime (hr)	50000H	
Warrant	3 years	
Operating Temp.(°C)	-20℃ ~45℃	
Storage Temp.(°C)	-20℃ ~65℃	
Installation	Recessed	
Brand Driver option	/	

`

Driver Datasheet

Model No.	BQ-YPL-U120-9-T-CCT	BQ-YPL-U175-12-T-CCT
Power Type	US standard power supply (Compatible with LEVITON / Lutron dimmers)	
Power(W)	9W	12W
Frequency(HZ)	60HZ	
Input Voltage(V)	AC100-130V	
Power Efficiency	≥87%	
Total load wattage(W)	9W±5%	12W±5%
Power Factor	≥0.9	
Rated Input Current(A)	≤0.1A	≤0.15A
Full load output voltage	DC27-30V	DC45-50V
Output current range	280mA±5%	280mA±5%
Power tolerance	±5%	
Current output tolerance	±5%	
Short circuit protection	PASS	
Over voltage protection	PASS	
Over temperature	PASS	
THD	/	
Surge	L-N 1000V	
Withstand voltage	AC 1500V	

Installation Procedure

WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.

Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.

Recessed into ceiling

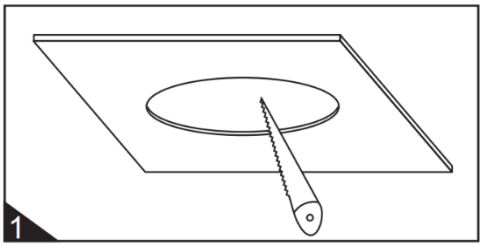

According to the cut size to cut the ceiling hole.

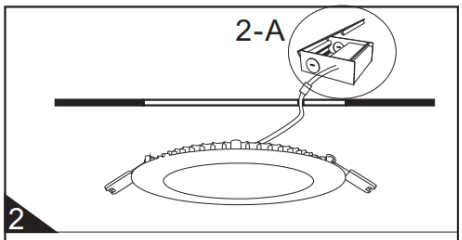

Cut off power,the driver wire connected with ceiling wire.

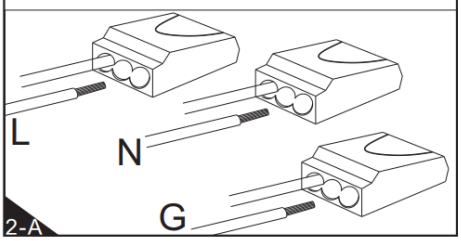

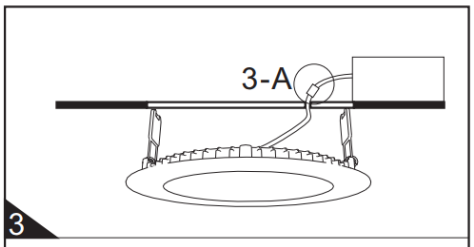

Insert panel light into the ceiling hole

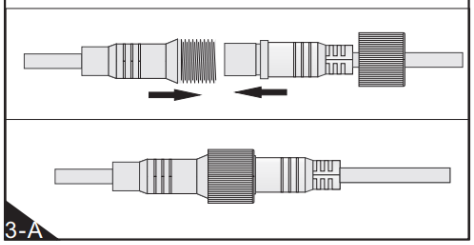

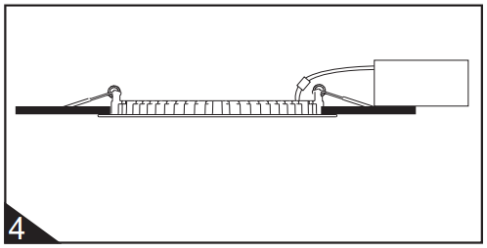

Install finishing