Lamily Corp

UFO HIGH BAY BLADE SERIES

CERTIFIED | DLC PREMIUM | FC | WARRANTY 5 YEARS | IP65 | IK08

120~277V | 0~10V Dimming | 50,000Hrs | CCT 3500~5000K | CCT FIELD ADJ. | WATT FIELD ADJ.

Product Features

- High efficiency LED Driver, the wide range input voltage AC120-277V, Surge protection: 6KV
- Designed to accept easy installation of optional sensor
- Powered by 0–10V driver with independent auxiliary power supply .
- Suspension mounting, surface mounting, pendant mounting
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- 5 years warranty
- PF>0.9, THD<20%, 6kV surge protection, IP65, IK08

Areas of application

Used for commercial and industrial high bay lighting applications, such as warehouses, gymnasiums and other industrial applications.

Accessories

1	2	3	4	5
				
Surface Mount U-bracket	*PC Refractor & Refractor Cover*	*Aluminum Reflector*	*Wire Guard*	*Safe Rope*

6	7	8	9
			
Emergency Driver	*Remote Control*	*PIR / Microware*	*Loop*

Dimension

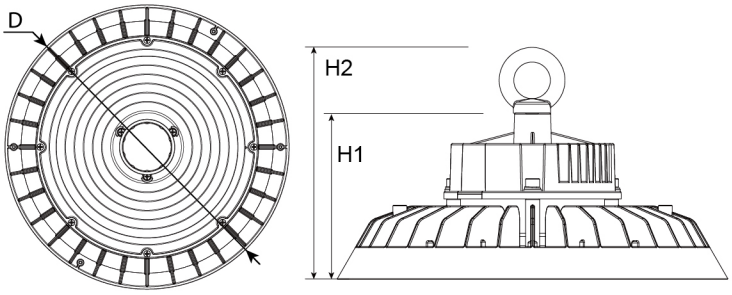

Wattage	D	H1	H2
300W	340mm/13.39"	123mm/4.84"	151mm/5.94"

Black

(Customizable Colors)



White

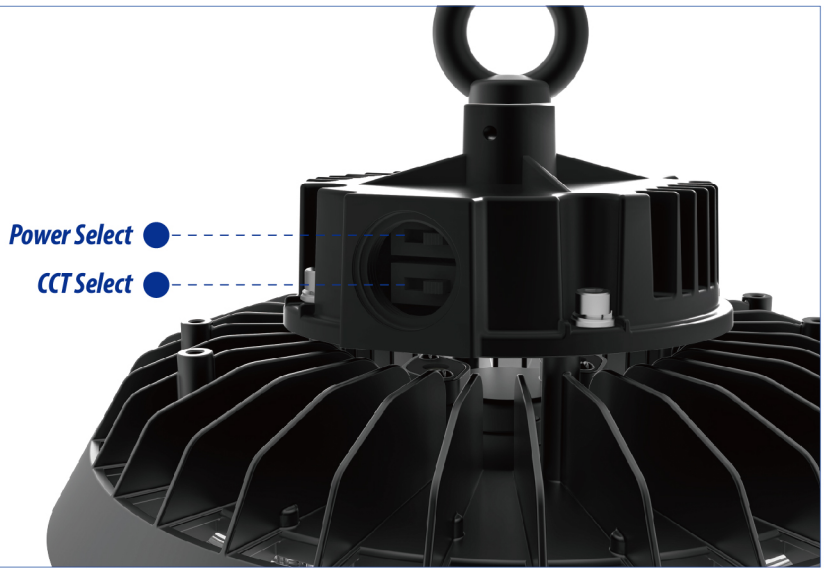

Specification

OPTICAL	Model	ALI-UFO-200/240/300W-3CCT-PRO-S2
	Input Power (± 10%)	300-240-200W select
	CCT	3500K-4000K-5000K selectable
	Efficacy(-3%)	Up to 150lm/W
	CRI	Ra80 (Ra70 is optional)
	SDCM	< 6
	Beam angle	110°
	UGR	< 28
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz
	PF (Tolerance: -3%)	≥0.9
	THD	≤20%
	Flicker Percent	< 10%
	Driver Surge protection	L/N-PE: 6kV, L-N: 6kV
	Dimming	0-10V dimming with 12V independent auxiliary power supply
	Sensor Type	Audio jack receptacle
MATERIALS	LED Brand	Brideglux
	Housing	Die-cast aluminum
	Housing Color	White, Black or Customized
	IK	IK08
	Waterproof Rating	Wet location (IP65)
OTHERS	Optional Accessory	Microwave Sensor, PIR sensor, Bluetooth sensor, wire guard, surface mounting bracket, PC refractor & refractor cover, Al reflector, emergency driver, safe rope
	Operating Temperature	Without Motion Sensor: -40℃ TO 50℃; With Sensor: -35℃ TO 50℃
	Storage Temperature	-40℃ TO 80℃
	Certificate	cULus, FCC, DLC Premium
	Warranty	5 years

Packing Information

	Outer Carton	QTY/CTN	QTY(20GP)	QTY(40HQ)	QTY(53HQ)
300W	350 x 360 x 155mm / 13.78" x 14.17" x 6.10"	1 PC	1536pcs	3168pcs	5117pcs