Lamily Corp

LED GARAGE & CANOPY LIGHT -GCP8

Adjustable + Switchable + Photocell

Description

LED canopy lights are versatile and energy saving fixtures, which are ideal for covered parking area, garages, walkways, and entrances. It comes with CCT and wattage selectable, allowing you to customize the LED light output to best fit your project. These products are energy-efficient replacements of existing surface mount products.

Application

- Covered Parking area
- Garages
- Walkways
- Gas station
- Entrances

Certificate

- UL
- DLC

5WATTS SELECTABLE | 3CCT SELECTABLE | CERTIFIED | DLC LISTED PREMIUM | 3 in1 PHOTOCELL | IP65 | 5 YEARS WARRANTY

LED GARAGE & CANOPY LIGHT - GCP8

Key Features

- DLC category meet both Canopy & Garage.
- 3CCT(3000/4000/5000K) and 5Wattages Selectable offer SKU reduction.
- 3-in-1 Color Temperature, Power, and integrated Photocell ON/OFF switch.
- Quick installation with flip-open cover.
- Plug-in sensor receptacle optional.
- 120-277 VAC for options.

Flip-open cover design

Makes mounting to a recessed junction box or conduit entry point both quick and trouble-free.

Die-cast aluminum housing provides great heat dissipation



3-in-1 Switch Button

- CCT Selectable
- Wattage Selectable
- Photocell ON/OFF

GCP8: Polycarbonate lens achieve 135° beam angle meet both Canopy & Garage DLC category.

Microwave Motion sensor/PIR sensor

LED GARAGE & CANOPY LIGHT - GCP8

Performance Summary

Model NO. #	Watts	CCT	LPW	Lumens(±10%)	Voltage	DIM	CRI	Beam Angle
GCP8-20/40/60/70/80W-3CCT	80/70/60/40/20W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	12000lm @80W	120-277V	0-10V	CRI>80	135°/145°

Remarks: 1. All above efficacy and lumens are subject to CRI>80 @5000K , please check IES files for accurate data.
2. GCP8-20/40/60/70/80W-3CCT, Z denotes voltage, L=AC120-277V, M=AC120-347V; A denotes function, S = microwave motion sensor, S1 = PIR sensor,
S2 = Photocell, E = emergency driver, M = Microwave motion sensor & emergency driver, M1 = PIR sensor & emergency driver,
M2 = Photocell & emergency driver; D5C3 denotes 0-10V dimming, 5 wattage selectable, and 3 CCT selectable.
3. CCT & Power Selectable models ship preset at the highest CCT and the highest wattage.
4. Factory default settings for Photocell and Microwave motion sensor are ON.

Performance

- LED Type: SMD2835
- Frequency: 50/60Hz
- THD: <20%
- Power Factor: ≥0.90
- IP Rating: IP65
- Operating Temp.: −40°F to 113°F (-40°C to +45°C) for Standard, 32°F to 104°F (0°C to +40°C) for EM version
- Surge Protection: L/N 6KV, L/N-P 6KV for Standard, L/N 1KV, L/N-P 2KV for EM version

Construction

- Lens: Polycarbonate
- Housing: Die-cast aluminum
- Finish: Bronze(Standard), Custom finishes available

Mounting

- Surface Mounting
- Pendant Mounting

Accessories (Sold separately)

Picture	Item #	Description
	ANT-5-4T	Sharkward Plug-in microwave motion sensor

Product Dimension

(unit: mm & inch)

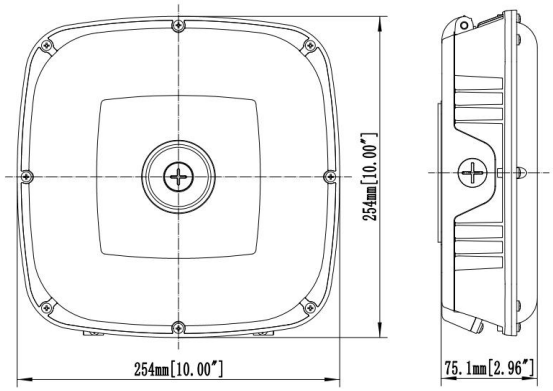

GCP8

LED GARAGE & CANOPY LIGHT - GCP8

Packing Info.

Product Size(inch & mm)	Product Weight (kg)		Package Weight (kg)		Carton Size(mm)	Q'ty/BOX (PCS)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
	N.W./PC	G.W./PC	N.W./CTN	G.W./CTN					
GCP8 (Standard) 10.00"*10.00"*2.96" 254.0*254.0*75.1mm	2.10	2.40	8.40	10.26	414*286*295	1	4	2968	7072