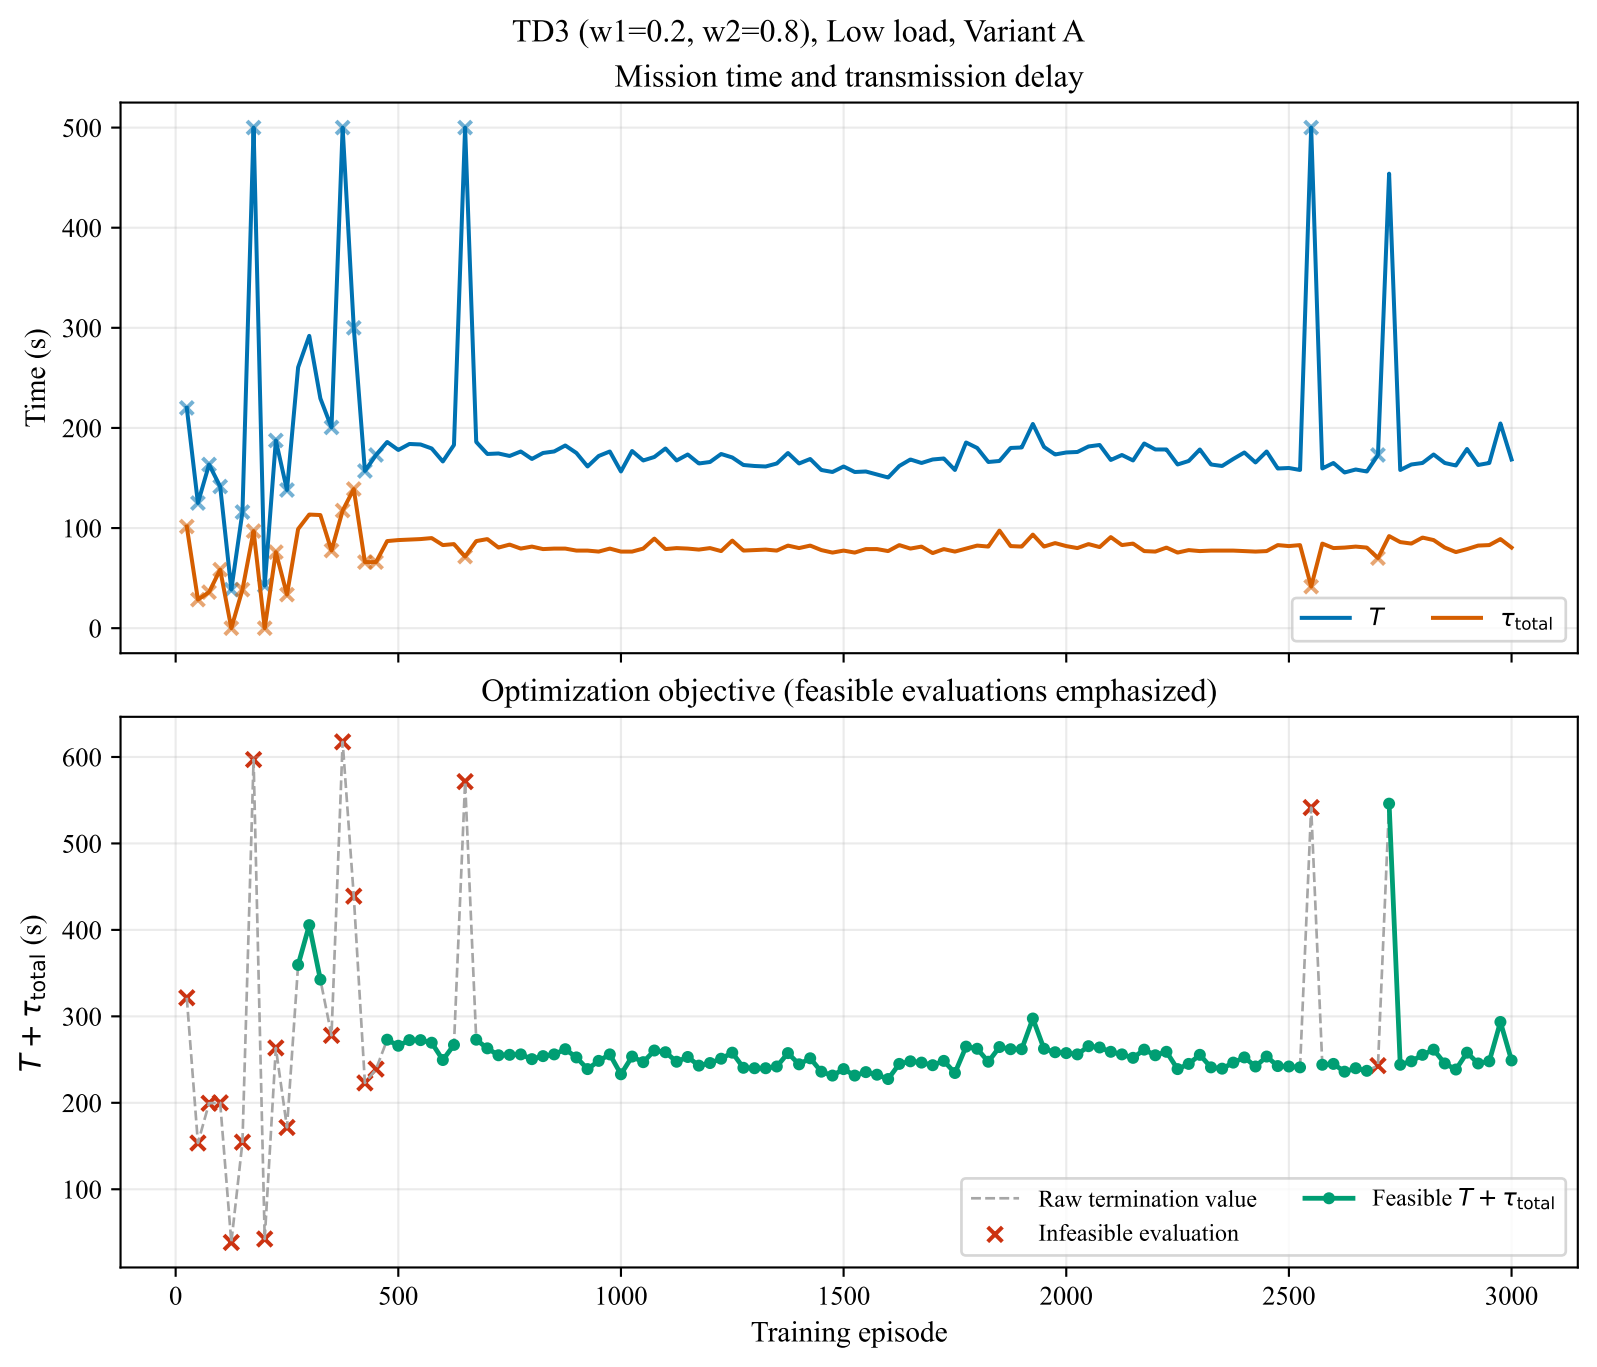
TD3 (w1=0.2, w2=0.8), Low load, Variant A
Mission time and transmission delay
Time (s)
0
100
200
300
400
500
T
τ_{total}
Optimization objective (feasible evaluations emphasized)
$T + \tau_{\text{total}}$ (s)
100
200
300
400
500
600
Raw termination value
Infeasible evaluation
Feasible $T + \tau_{\text{total}}$
0
500
1000
1500
2000
2500
3000
Training episode