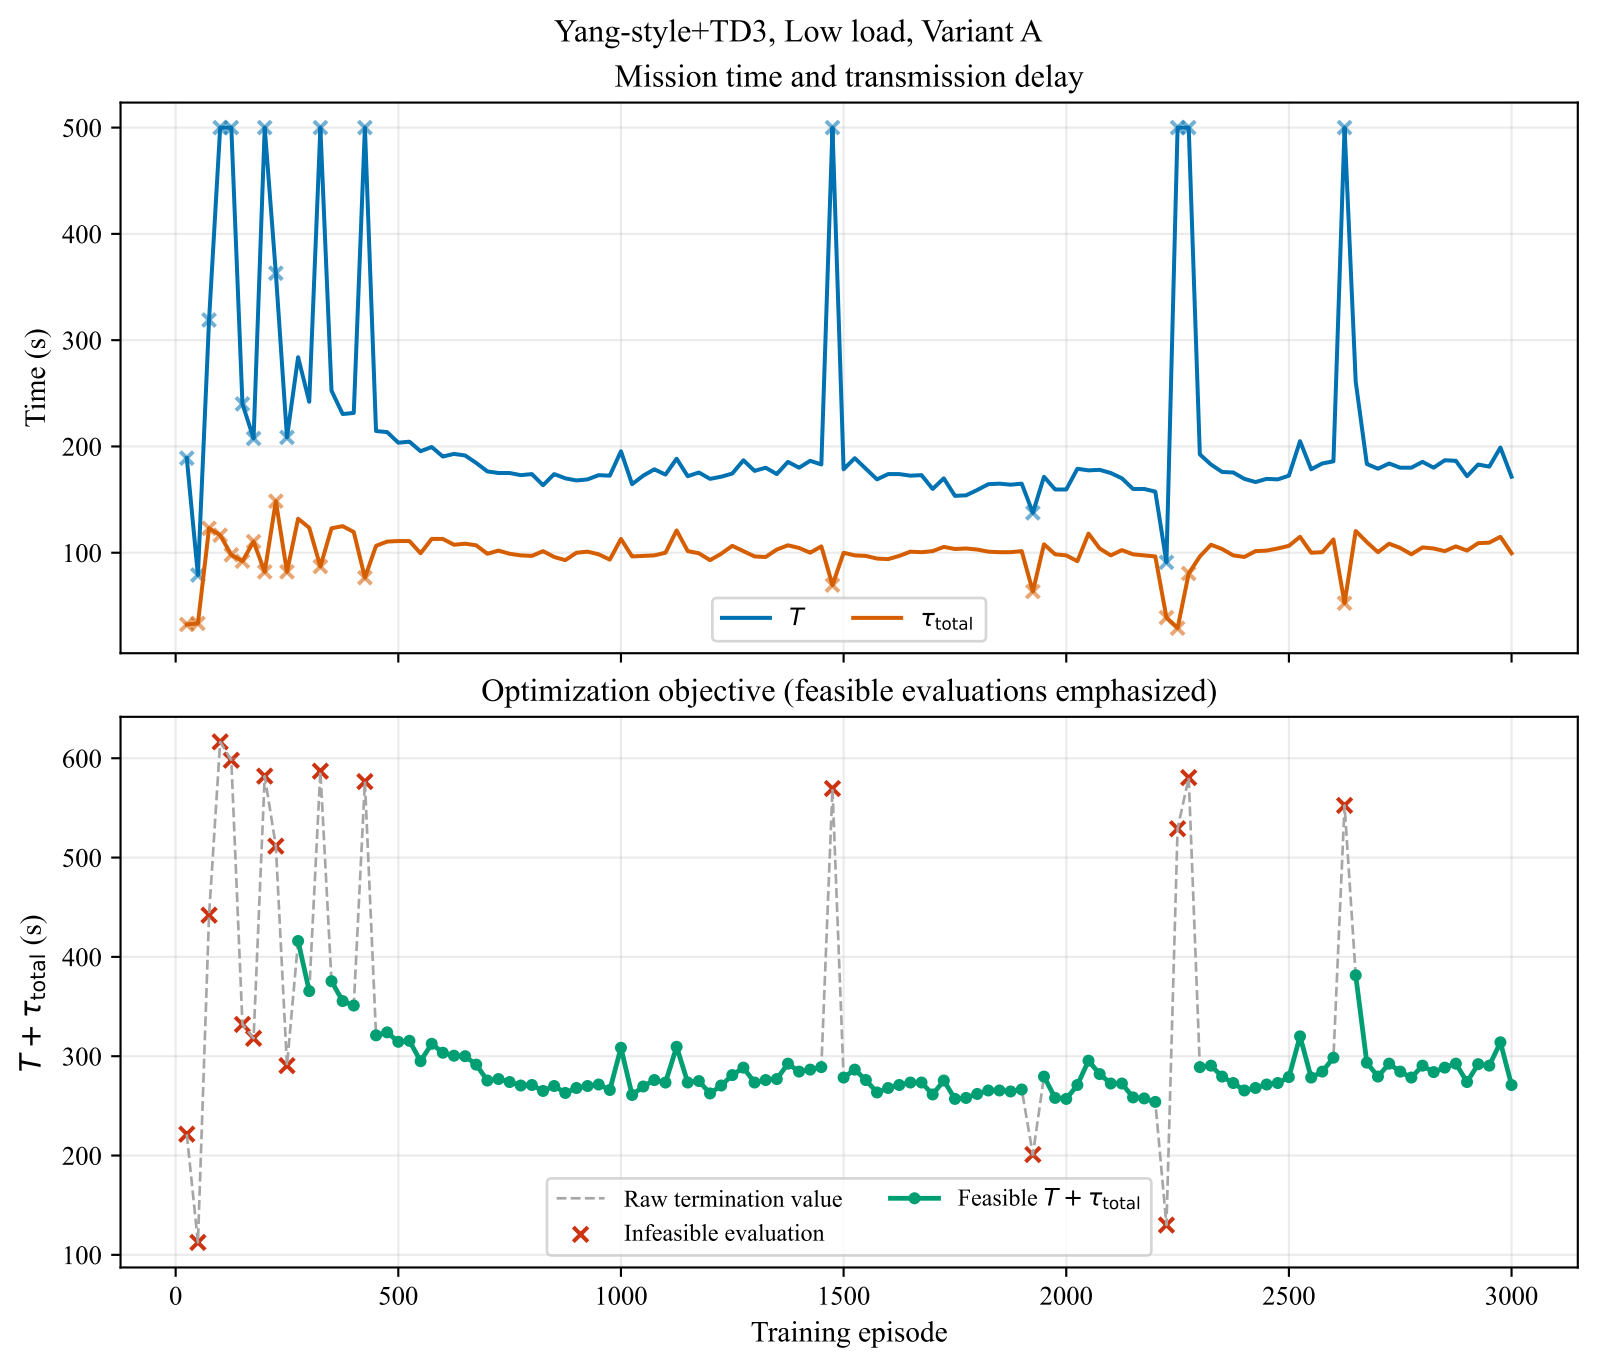
Yang-style+TD3, Low load, Variant A
Mission time and transmission delay
Time (s)
500
400
300
200
100
T
τ_{total}
Optimization objective (feasible evaluations emphasized)
$T + \tau_{\text{total}}$ (s)
600
500
400
300
200
100
Raw termination value
Infeasible evaluation
Feasible $T + \tau_{\text{total}}$
0
500
1000
1500
2000
2500
3000
Training episode