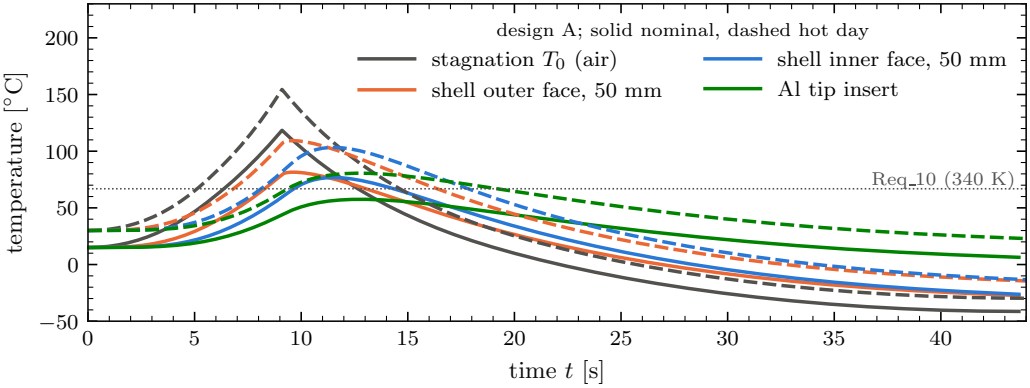

design A; solid nominal, dashed hot day
stagnation T_0 (air)
shell outer face, 50 mm
shell inner face, 50 mm
Al tip insert
Req_10 (340 K)
temperature [°C]
time t [s]
200
150
100
50
0
−50
0
5
10
15
20
25
30
35
40