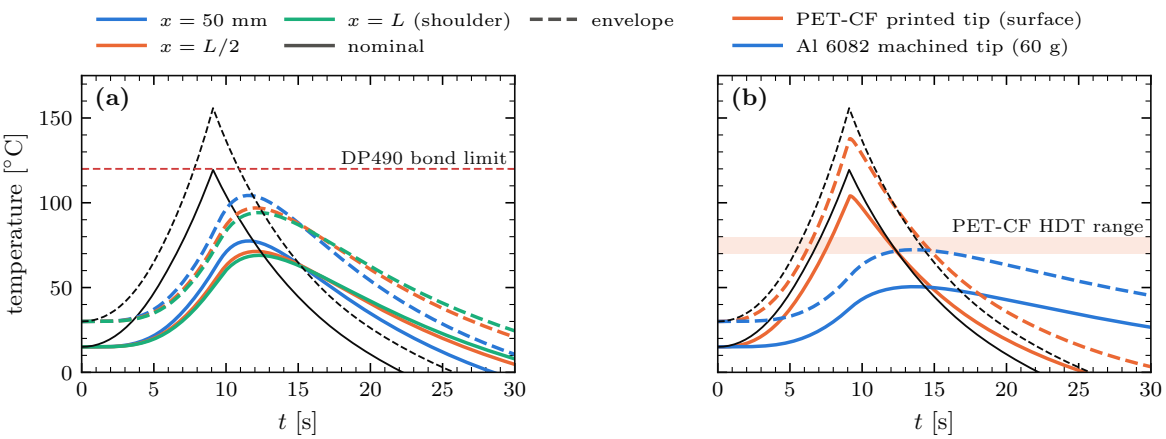

x = 50 mm
x = L/2
x = L (shoulder)
nominal
envelope
PET-CF printed tip (surface)
Al 6082 machined tip (60 g)
(a)
(b)
DP490 bond limit
PET-CF HDT range
temperature [°C]
t [s]
0
50
100
150
0
5
10
15
20
25
30