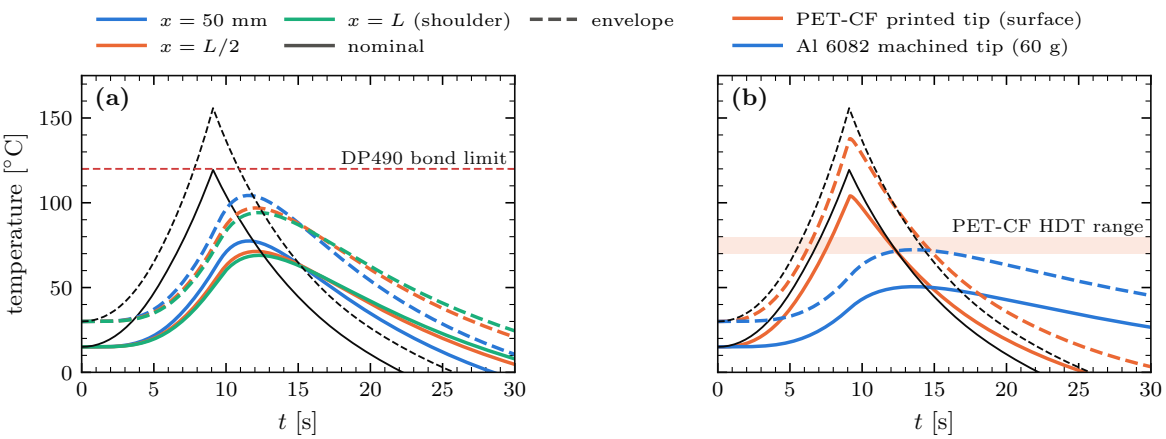

x = 50 mm
x = L/2
x = L (shoulder)
nominal
envelope
(a)
DP490 bond limit
temperature [°C]
t [s]
PET-CF printed tip (surface)
Al 6082 machined tip (60 g)
(b)
PET-CF HDT range
t [s]