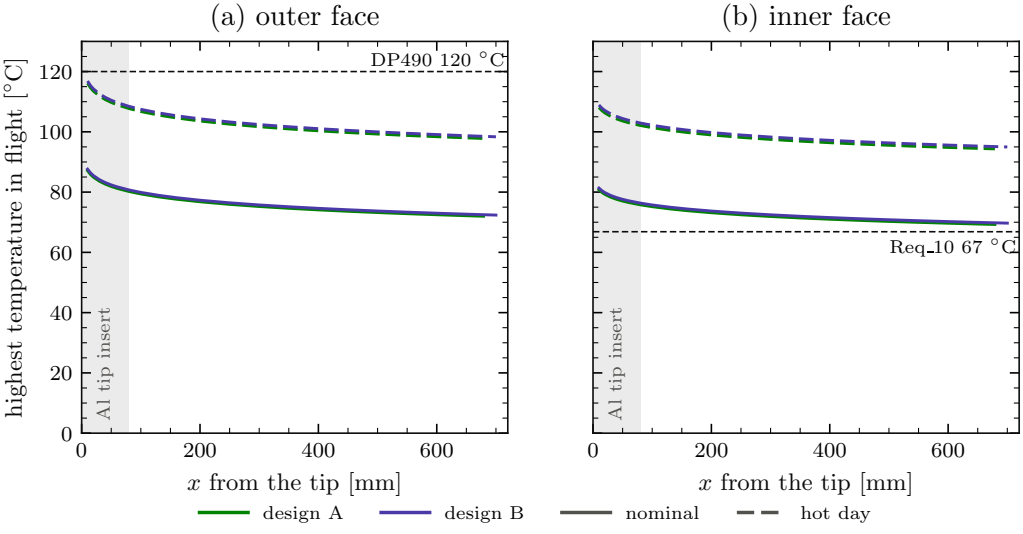

(a) outer face
(b) inner face
DP490 120 °C
Req_10 67 °C
Al tip insert
Al tip insert
highest temperature in flight [°C]
0
20
40
60
80
100
120
0
200
400
600
0
200
400
600
x from the tip [mm]
x from the tip [mm]
design A
design B
nominal
hot day