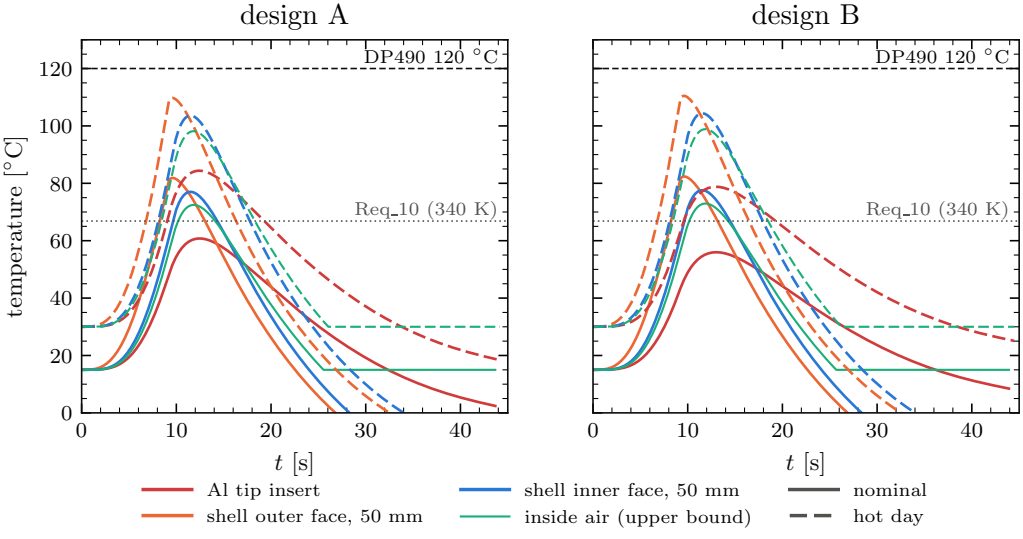

design A
design B
DP490 120 °C
Req_10 (340 K)
temperature [°C]
t [s]
0
20
40
60
80
100
120
10
30
Al tip insert
shell outer face, 50 mm
shell inner face, 50 mm
inside air (upper bound)
nominal
hot day