




7.5.3.1. 8-bit Data Bus for 16-bit/pixel (RGB 5-6-5 bits input), 65K-color

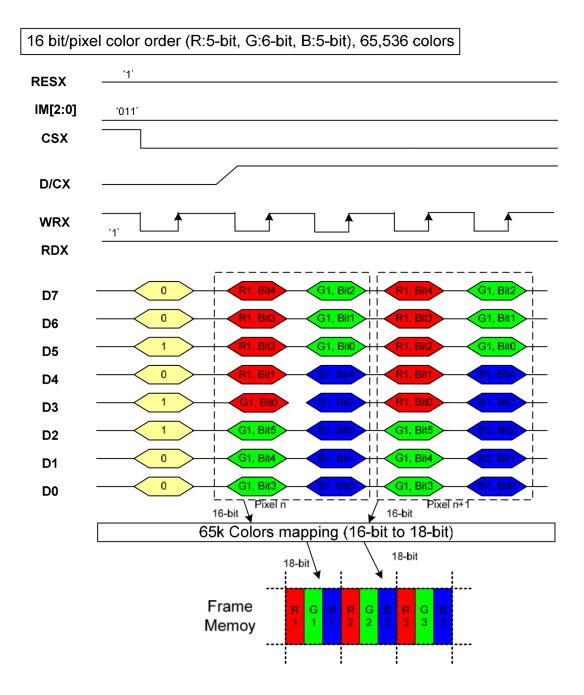

Note 1: The data order is as follows, MSB=D7, LSB=D0 and picture data is MSB=Bit 5, LSB=Bit 0 for Green data and MSB=Bit 4, LSB=Bit0 for Red and Blue data.

Note 2: 2-times transfer is used to transmit 1 pixel data with the 16-bits color depth information.


Note 3: '-'= Don't care - Leave these pins to Open.

Page 50 of 219 Version: 0.06





7.5.3.2. 8-bit Data Bus for 18-bit/pixel (RGB 6-6-6 bits input), 262K-color

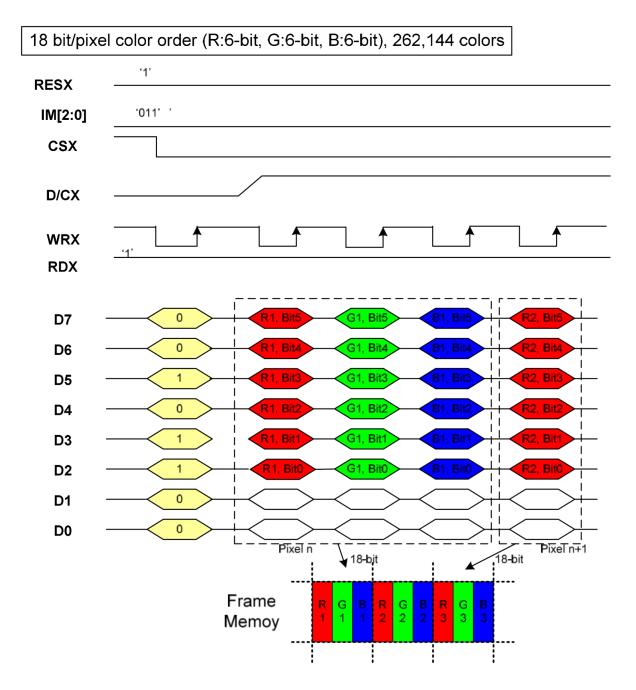

Note 1: The data order is as follows, MSB=D7, LSB=D0 and picture data is MSB=Bit 5, LSB=Bit 0 for Green, Red and Blue data.

Note 2: 3-times transfer is used to transmit 1 pixel data with the 18-bits color depth information.

Note 3: '-'= Don't care - Leave these pins to Open.

Page 51 of 219 Version: 0.06