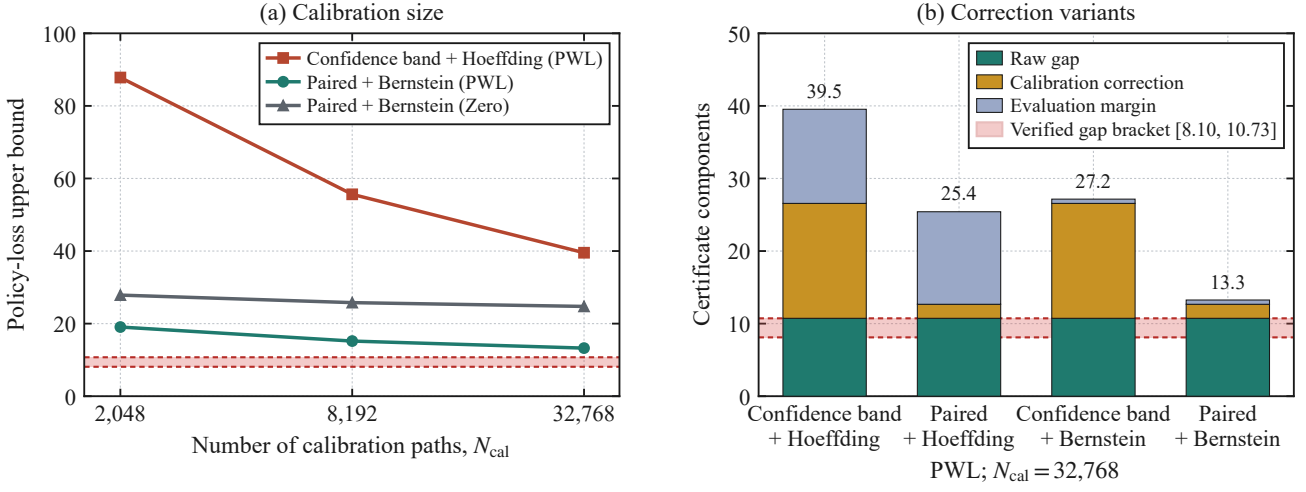
(a) Calibration size
Policy-loss upper bound
Number of calibration paths, N_{cal}
Confidence band + Hoeffding (PWL)
Paired + Bernstein (PWL)
Paired + Bernstein (Zero)
100
80
60
40
20
0
2,048
8,192
32,768
(b) Correction variants
Certificate components
Raw gap
Calibration correction
Evaluation margin
Verified gap bracket [8.10, 10.73]
39.5
25.4
27.2
13.3
50
40
30
20
10
0
Confidence band + Hoeffding
Paired + Hoeffding
Confidence band + Bernstein
Paired + Bernstein
PWL; $N_{\text{cal}} = 32{,}768$