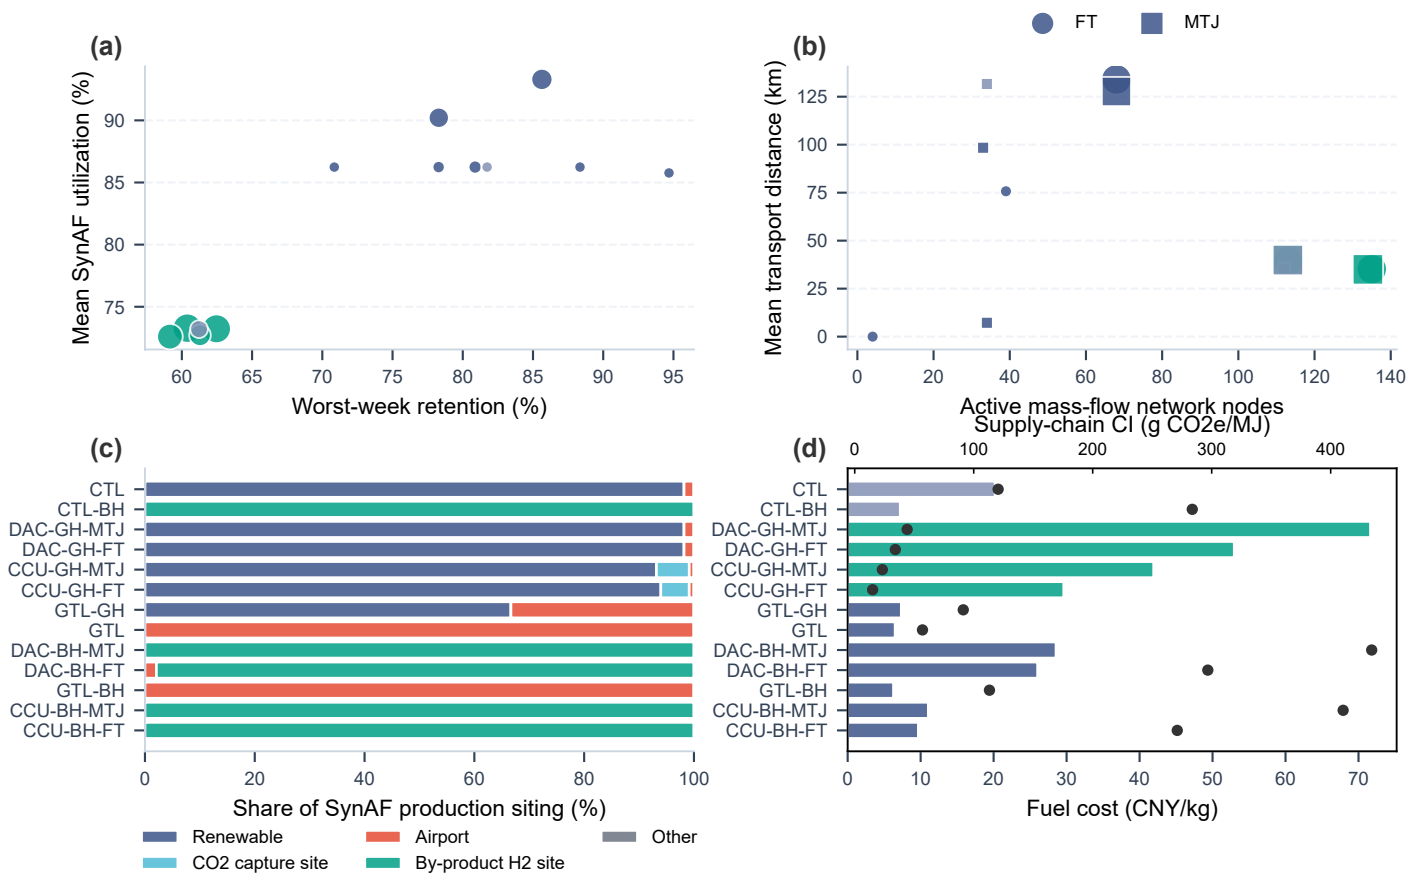
(a)
Mean SynAF utilization (%)
90
85
80
75
60
65
70
75
80
85
90
95
Worst-week retention (%)
(b)
FT
MTJ
Mean transport distance (km)
125
100
75
50
25
0
0
20
40
60
80
100
120
140
Active mass-flow network nodes
Supply-chain CI (g CO2e/MJ)
(c)
CTL
CTL-BH
DAC-GH-MTJ
DAC-GH-FT
CCU-GH-MTJ
CCU-GH-FT
GTL-GH
GTL
DAC-BH-MTJ
DAC-BH-FT
GTL-BH
CCU-BH-MTJ
CCU-BH-FT
0
20
40
60
80
100
Share of SynAF production siting (%)
Renewable
Airport
Other
CO2 capture site
By-product H2 site
(d)
0
100
200
300
400
CTL
CTL-BH
DAC-GH-MTJ
DAC-GH-FT
CCU-GH-MTJ
CCU-GH-FT
GTL-GH
GTL
DAC-BH-MTJ
DAC-BH-FT
GTL-BH
CCU-BH-MTJ
CCU-BH-FT
0
10
20
30
40
50
60
70
Fuel cost (CNY/kg)