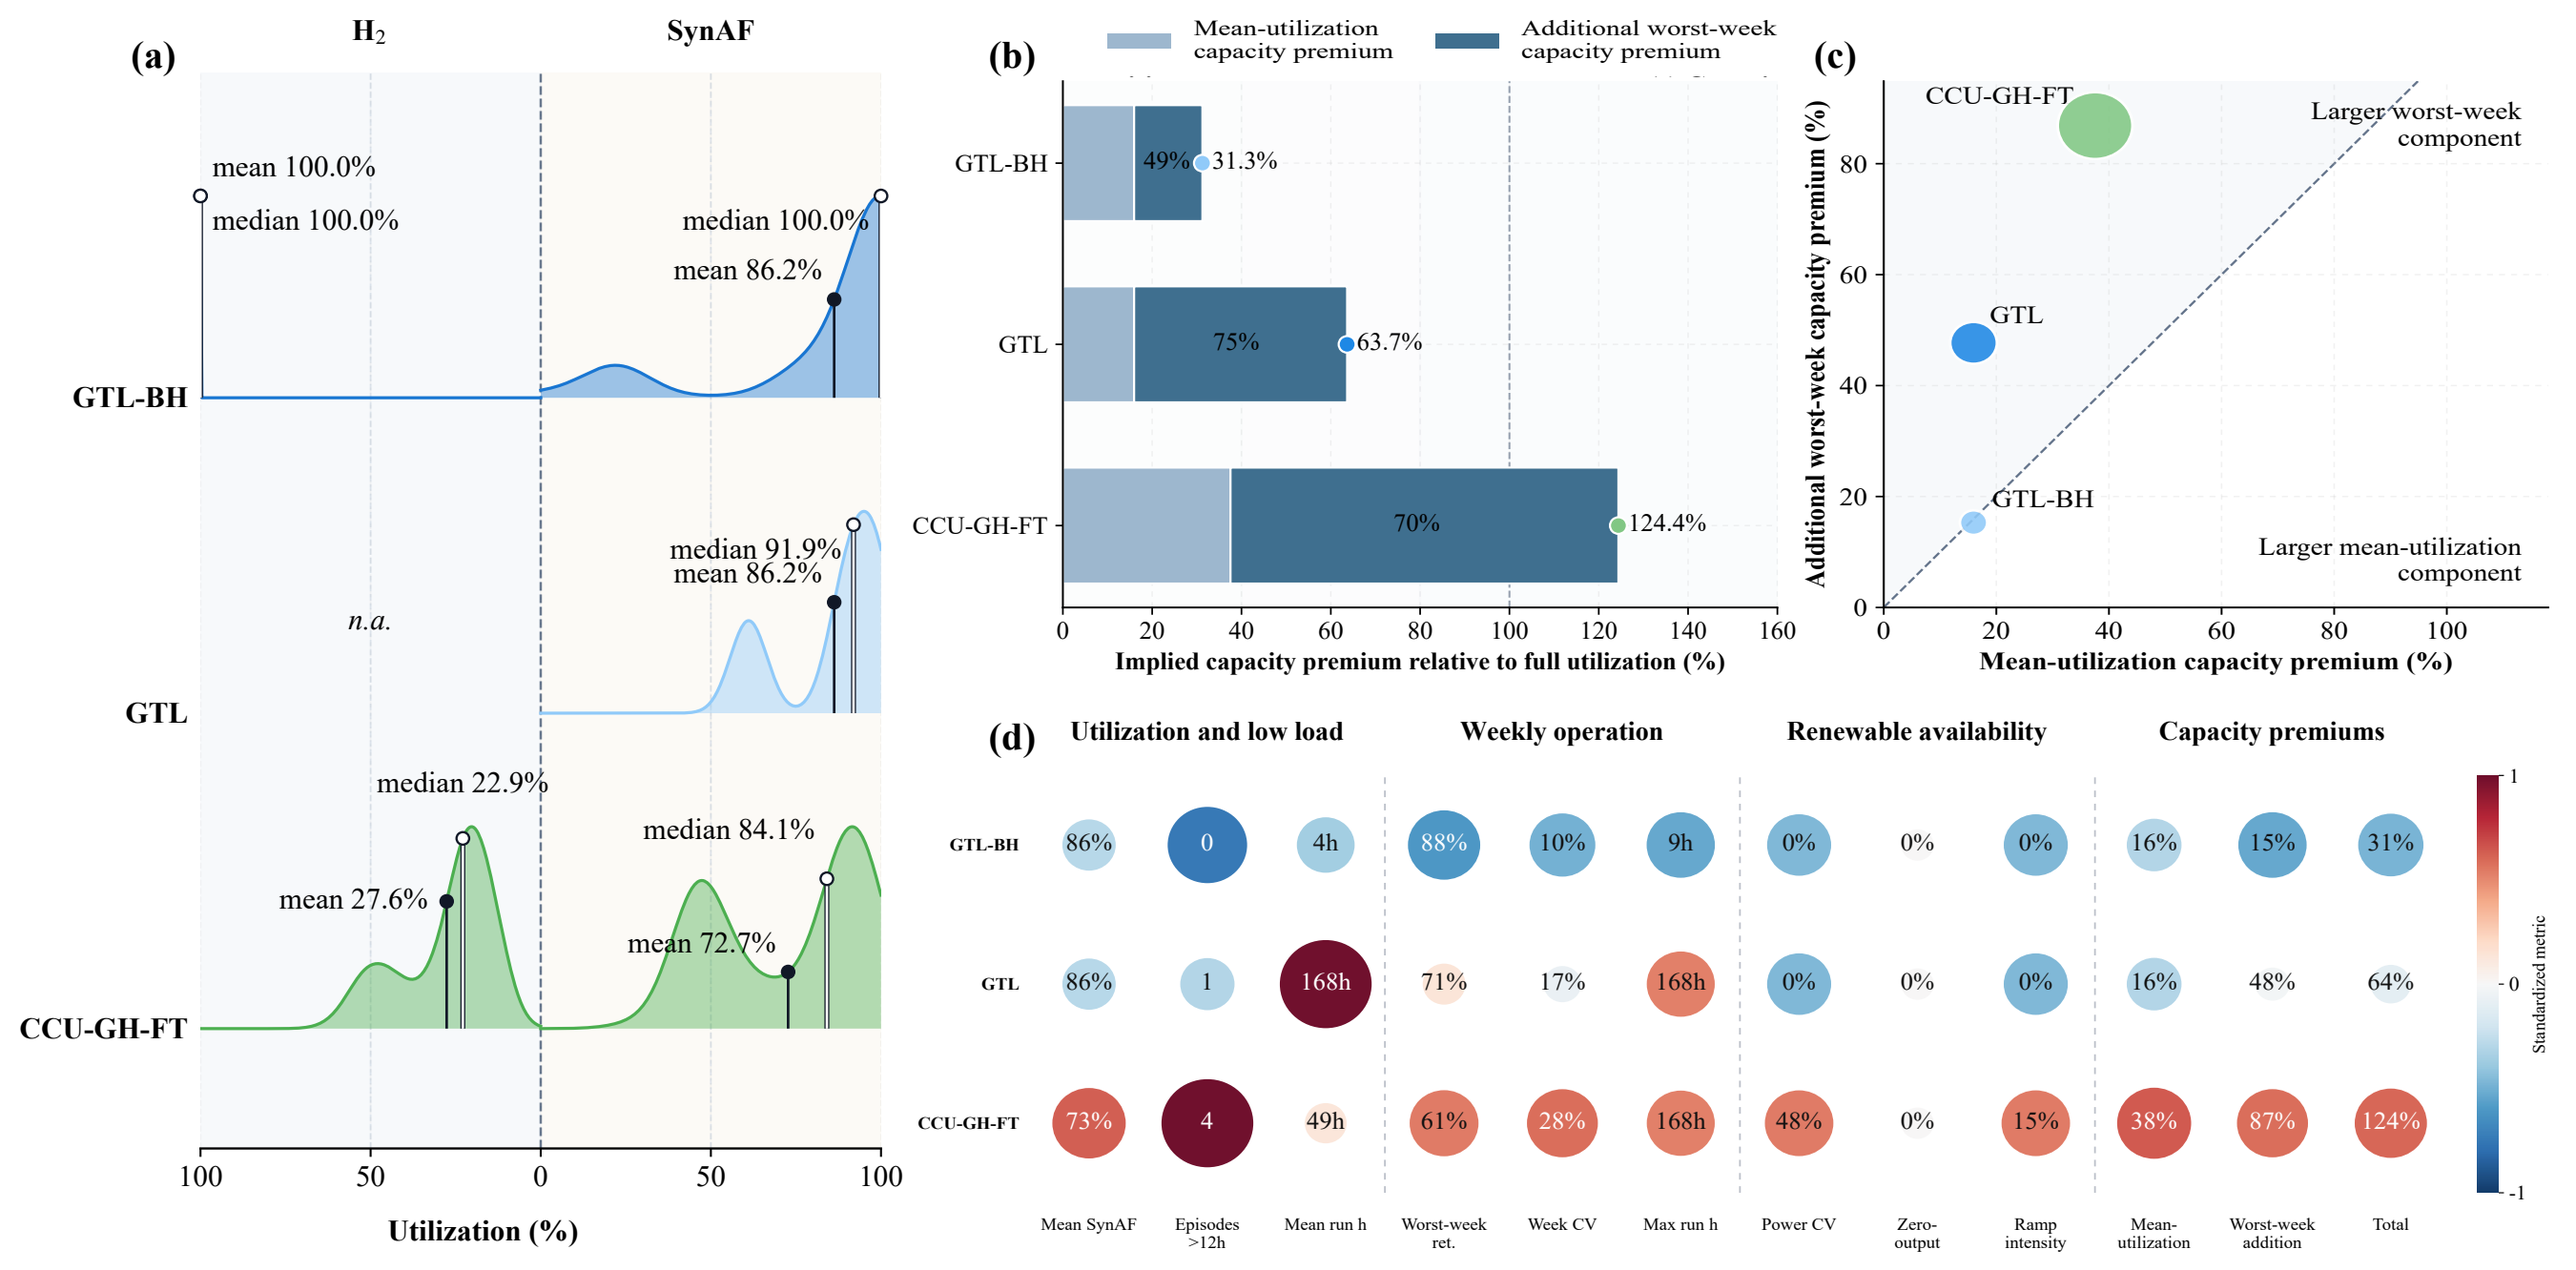

(a)
H2
SynAF
mean 100.0%
median 100.0%
median 100.0%
mean 86.2%
GTL-BH
n.a.
median 91.9%
mean 86.2%
GTL
median 22.9%
median 84.1%
mean 27.6%
mean 72.7%
CCU-GH-FT
100
50
0
50
100
Utilization (%)
(b)
Mean-utilization capacity premium
Additional worst-week capacity premium
GTL-BH
49%
31.3%
GTL
75%
63.7%
CCU-GH-FT
70%
124.4%
0
20
40
60
80
100
120
140
160
Implied capacity premium relative to full utilization (%)
(c)
CCU-GH-FT
Larger worst-week component
GTL
GTL-BH
Larger mean-utilization component
Additional worst-week capacity premium (%)
Mean-utilization capacity premium (%)
(d)
Utilization and low load
Weekly operation
Renewable availability
Capacity premiums
GTL-BH
86%
0
4h
88%
10%
9h
0%
0%
0%
16%
15%
31%
GTL
86%
1
168h
71%
17%
168h
0%
0%
0%
16%
48%
64%
CCU-GH-FT
73%
4
49h
61%
28%
168h
48%
0%
15%
38%
87%
124%
Mean SynAF
Episodes >12h
Mean run h
Worst-week ret.
Week CV
Max run h
Power CV
Zero-output
Ramp intensity
Mean-utilization
Worst-week addition
Total
Standardized metric
1
0
-1