MRDVS
Mobile Robot Vision Expert

www.mrdvs.com

S Series dToF RGB-D Cameras

Perception That Persists, Outdoors and Beyond


The S Series redefines industrial 3D sensing by overcoming the physical limits of iToF and stereo vision. Where competitors lose fidelity in harsh sunlight, our dToF architecture delivers stable, high-confidence depth data consistently.



「S10」 「S11」

Ethernet Interface

Use Cases

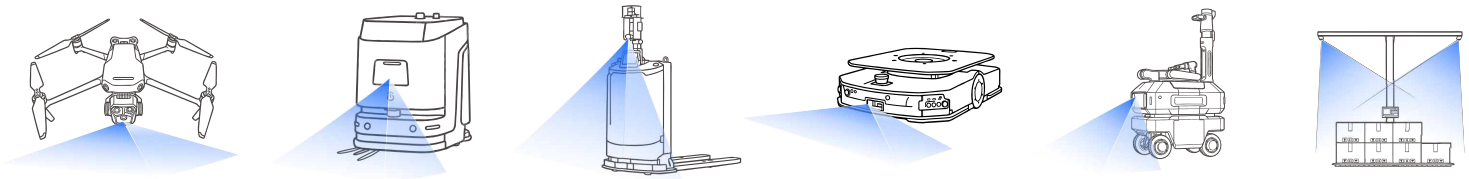

Superior by Design

Challenging Surfaces

Detects glossy and pitch-black objects with ease.

Multipath Resilience

Delivers distortion-free data on walls and 90° corners.


Unfazed by Light Shifts


Reliable through indoor-to-outdoor light changes.

Wide-FOV Coverage


Expansive field of view, minimized blind spots.

Model	Ranging Distance	Depth Resolution	Depth FOV	Interface Support
S10	0.3-8m	240 × 160 @ 15 FPS	120° × 80°	Ethernet/GMSL
S11	0.1-5m	240 × 96 @ 10 FPS	136° × 56°	Ethernet/USB/MIPI






Multiple Application Scenarios




AGV/AMR




Embodied Humanoid



UAV




Volume Measurement



Quadruped Robot



Cleaning Robot



Robotic Lawn Mower



Autonomous Delivery Robot

MRDVS
Mobile Robot Vision Expert

www.mrdvs.com

M4 Mega iToF RGB-D Camera

Powered by Sony's iToF Sensor Technology

The M4 Mega delivers high-resolution 3D perception with 640 × 480 depth resolution, and is designed for target working distances up to 5 meters, it provides reliable depth data independent of lighting conditions and object textures, making it an efficient, compact solution for indoor and outdoor robotic applications.



M4 Mega

Ethernet Interface


High-resolution Depth


Accurate 3D Measurement


RGB-D Data Fusion


Industrial-grade Design

Use Cases











Detection Algorithm

⟶ *Depalletizing*


Combines 2D imaging and 3D point clouds to identify soft packs and provide 3D position and pose data for robotic arms






⟶ *Pallet Detection Onboard*

Pre-integrated pallet recognition algorithm for forklift docking. Supports wooden/plastic/dark-colored pallets





Model	Depth Resolution	Depth FOV	Ranging Distance	Accuracy	Interface Support
 M4 Mega	640 × 480 @ 15fps	86° × 61°	0.2 ~ 5 m	±3 mm + 0.25% × depth	Gigabit Ethernet / CAN

Multiple Application Scenarios



Embodied Dexterous Grasping



Bin Stacking



Pallet Pocket Recognition



Depalletizing