

siteco



NEW

Types,
data sheets,
configuration –
everything at a glance:

Apollon 21




Apollon 21

Modularity and efficiency in perfection.

Modularity and efficiency in perfection.

The Apollon portfolio combines maximum efficiency with maximum modularity – modern lighting for new office environments.

Apollon – Quantum leap panels.

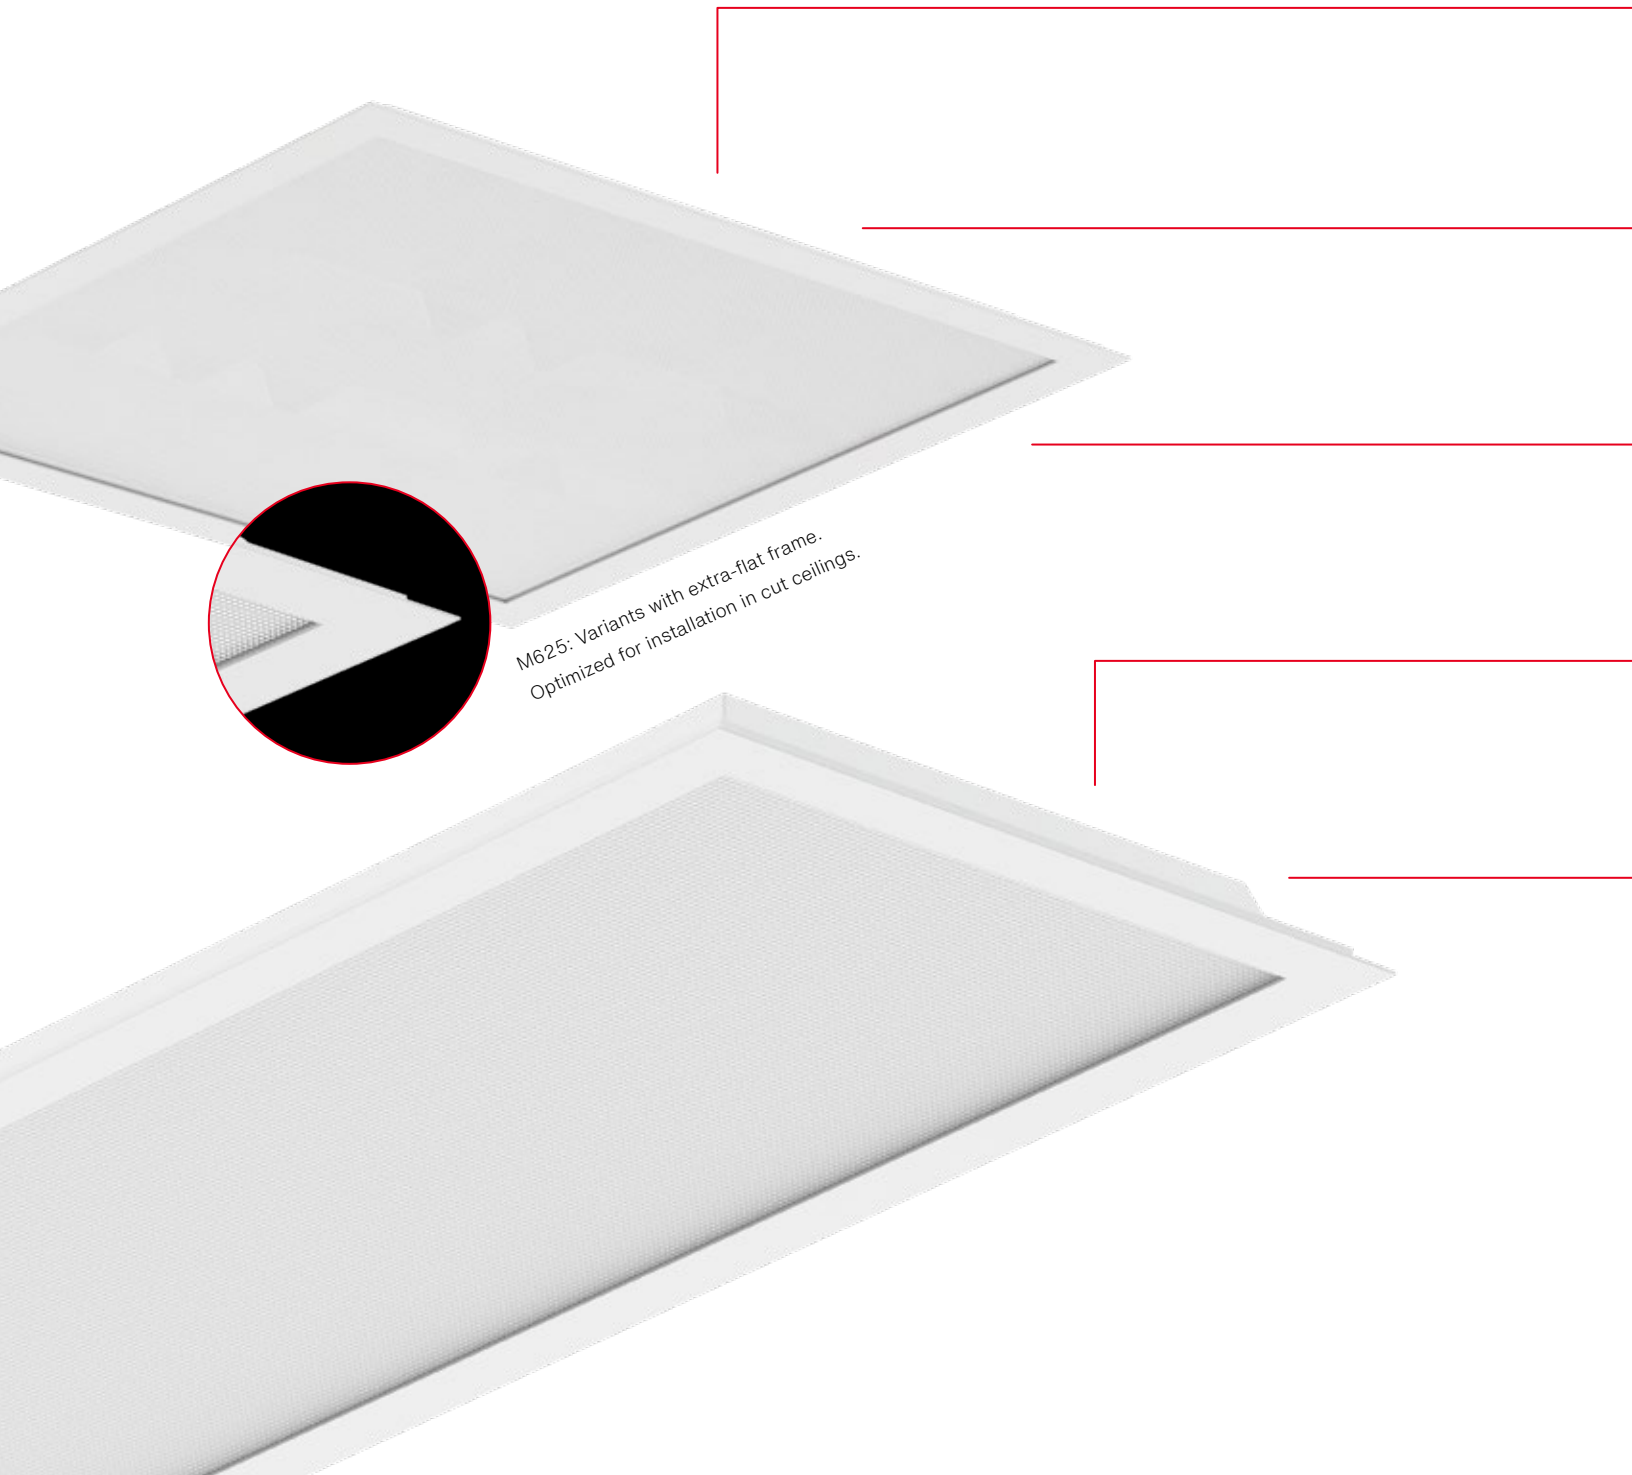

M625: Variants with extra-flat frame.
Optimized for installation in cut ceilings.

Modular

5 ECGs for luminous flux from 1,000 to 7,400 lm. Electronic components replaceable

Flexible

A wide range of light colors, 10 sizes, and extensive accessories for various mounting options.

Innovative

Microprismatic lighting technology for uniform illumination and maximum glare control, UGR ≤ 19 (BAP-compliant).

Efficient

Up to 180 lm/W: maximum energy efficiency –for lower operating costs and rapid amortization.


Robust

Emergency lighting certification according to IEC 60598-2-22. High room-side protection rating IP50. Square versions available with up to IP54. Lifetime 100,000 h (L80/B50).


Up to
180
lm/W

Apollon 21


Mounting variants.

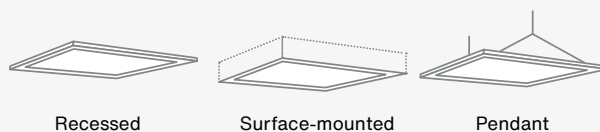

Sizes.

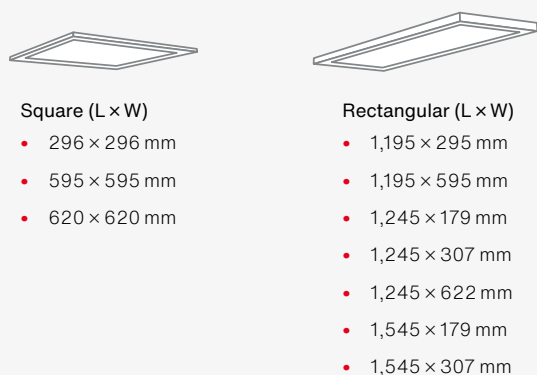


Light colors.

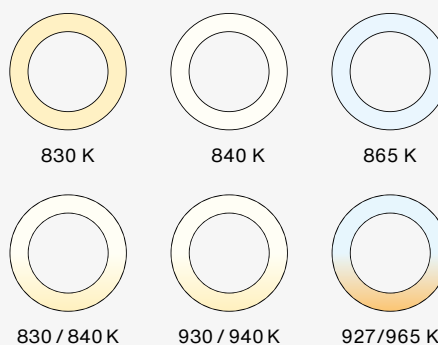

Drivers.

- ON / OFF Multilumen
- DALI 2 Multilumen
- High Lumen ON / OFF Multilumen
- High Lumen DALI 2 Multilumen + DALI parts 25x
- High Lumen CLO DALI 2 Multilumen + DALI parts 25x

Apollon 21 at a glance.

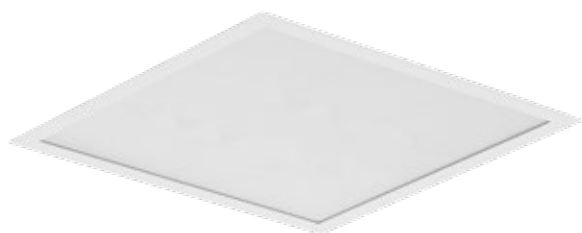

Apollon 21 square

Technical data

Luminous flux: 1,000 ... 7,400 lm

Luminous Efficacy: up to 180 lm/W

Service life: 100,000 h (L80) with CLO (L100)

Color temperature: 3,000 K | 4,000 K | 6,500 K

Color rendering index: CRI ≥ 80



Apollon 21 rectangular

Technical data

Luminous flux: 1,000 ... 7,500 lm

Luminous Efficacy: up to 180 lm/W

Service life: 100,000 h (L80) with CLO (L100)

Color temperature: 4,000 K | Multicolor 3,000 K / 4,000 K

Color rendering index: CRI ≥ 80

Apollon 21 square IP54

Technical data

Luminous flux: 1,300 ... 6,400 lm

Luminous Efficacy: up to 165 lm/W

Service life: 100,000 h (L80)

Color temperature: Multicolor 3,000 K / 4,000 K | TW

Color rendering index: CRI ≥ 80 | CRI ≥ 90

Technical data Apollon 21 (cross-size)

Power: up to 46 W

Light distribution: wide

Electrical connection: junction box terminal
0.75 ... 2.5 mm² – terminal for through-wiring.

Contact.

Siteco GmbH

Georg-Simon-Ohm-Str. 50
83301 Traunreut, Germany
Phone +49 8669 330
sales-int@siteco.com

[siteco.com](https://www.siteco.com)

Types,
data sheets,
configuration –
everything at a glance:

Apollon 21

