


SAVVY^{TREND} Analysis


N205EN · RV-10 · IO-540 · 2020

Includes 165 flights between Jul 26, 2022 and Jul 26, 2026 ,compared with 81862 flights by a cohort of 392 RV-10 aircraft.

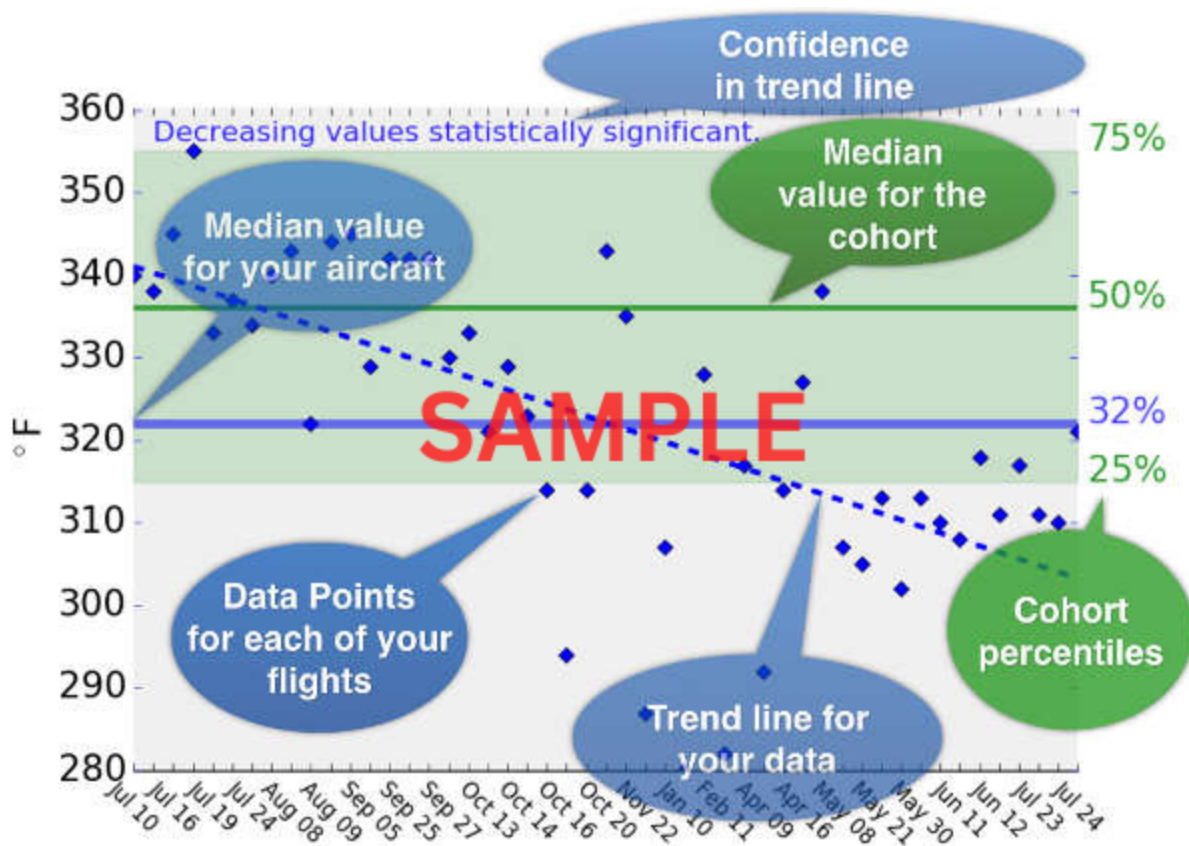

PERCENT POWER IN CRUISE

Measures your engine's power output during cruise flight. High power output for extended periods can contribute to reduced fuel efficiency, elevated CHT and reduced cylinder life.

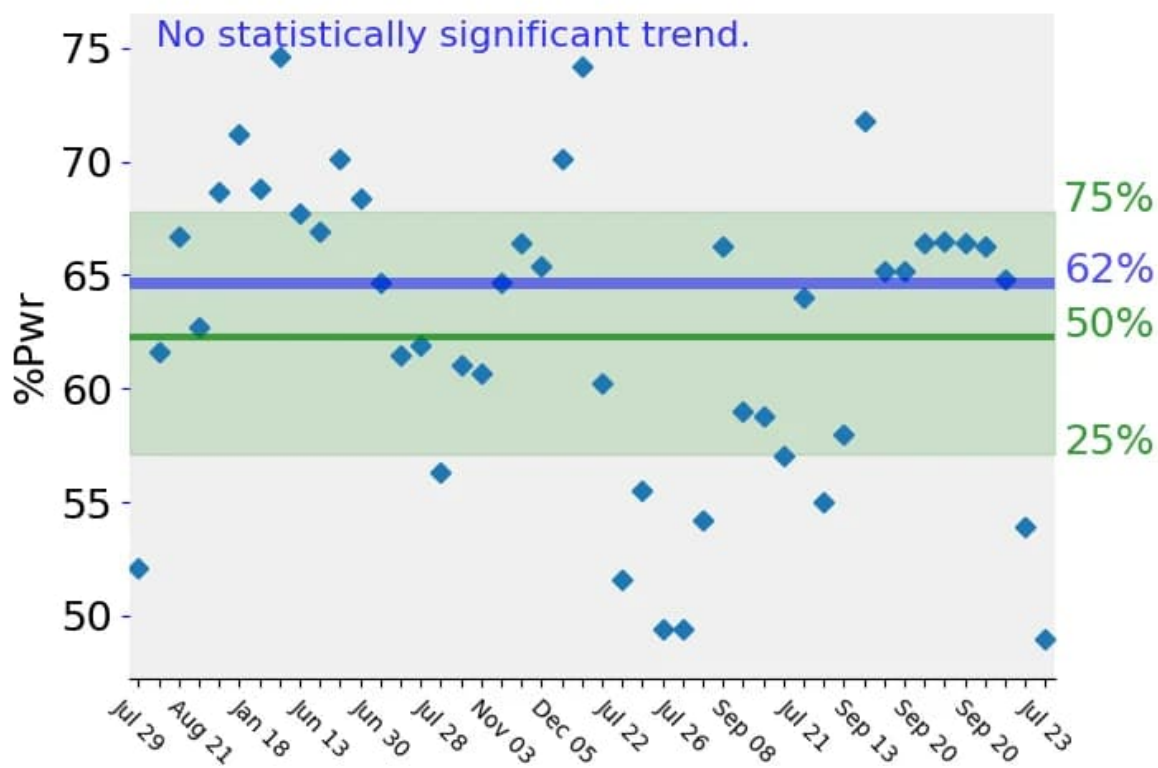


SAVVY SAYS...

The median of your engine's power output during cruise flights is about average.

ALTITUDE IN CRUISE (MSL)

Measures the altitude during the cruise phase of flight. For turbocharged aircraft, higher altitudes generally provide better performance and efficiency.

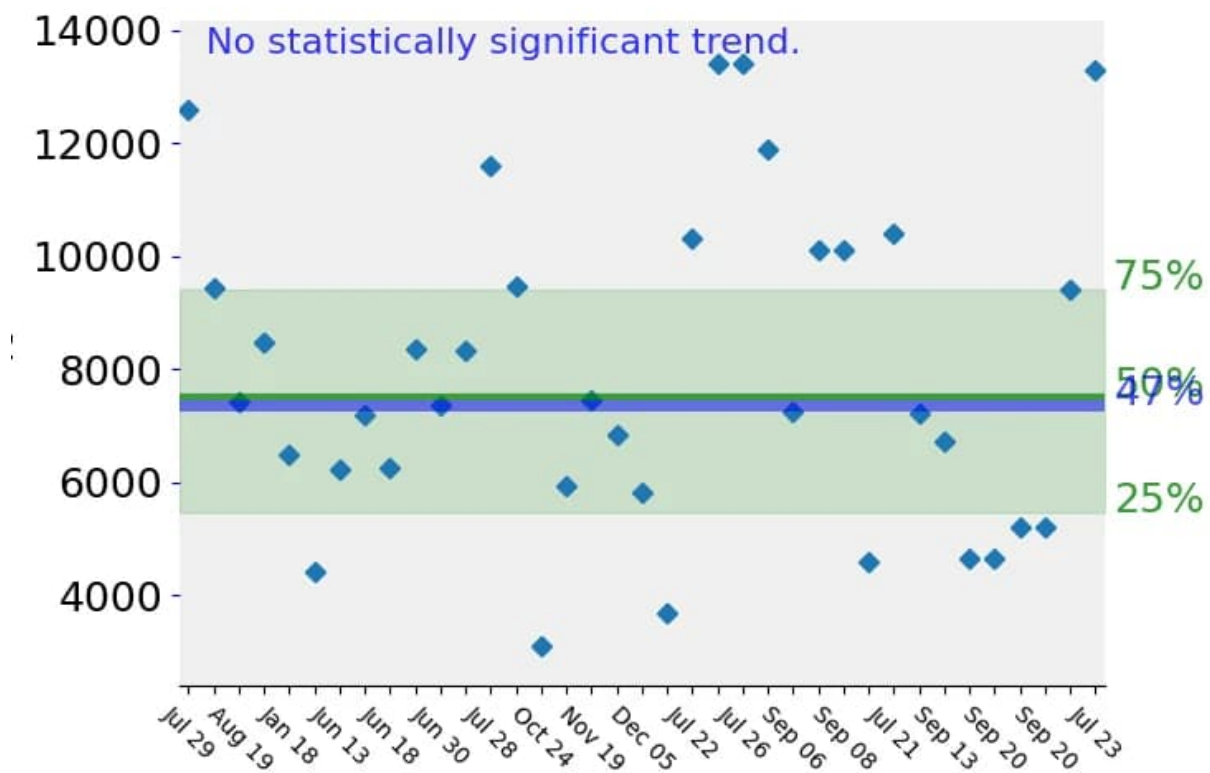


SAVVY SAYS...

Your cruising altitudes tend to be at mid-levels, resulting in average fuel efficiency and performance.

TRUE AIRSPEED

This is the true airspeed in cruise, if available. Higher speed might be due to high power output, resulting in high CHT and reduced cylinder life, or possibly operation at higher, more efficient altitudes.

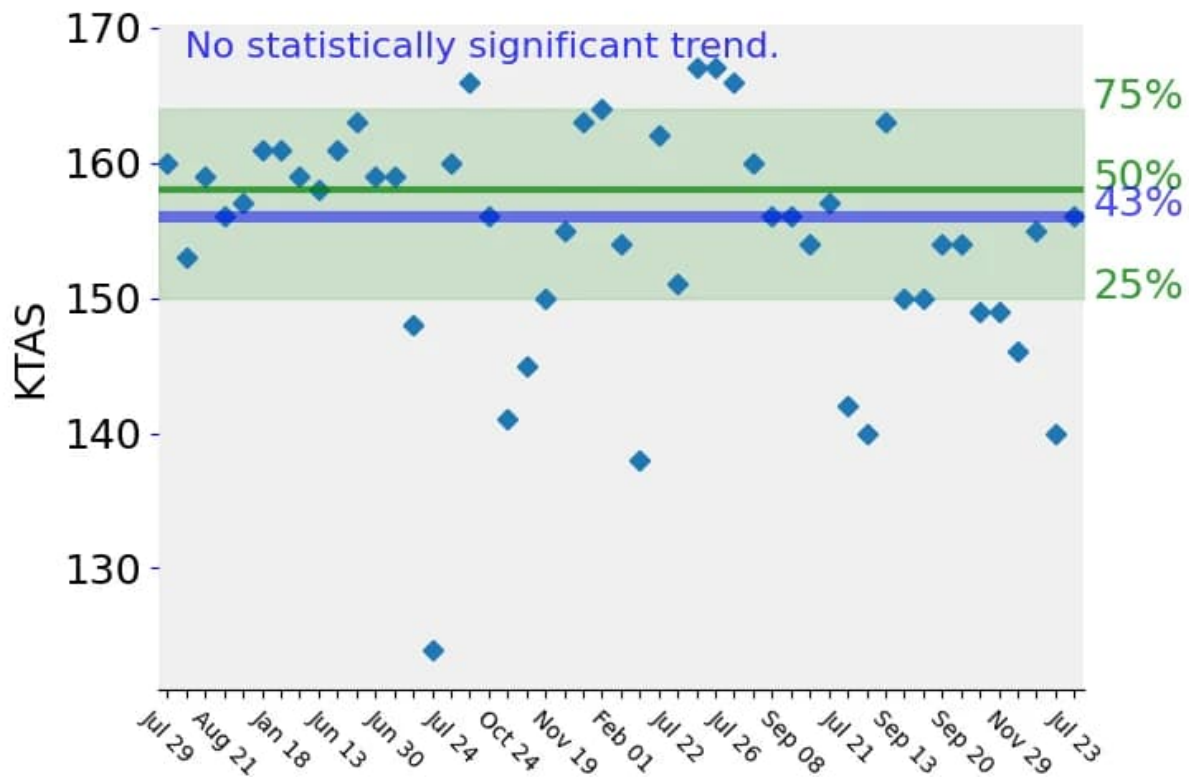


SAVVY SAYS...

Your cruise speed is average when compared with your cohort.

FUEL EFFICIENCY (NM PER GAL.)

Measures your aircraft's fuel efficiency during cruise flight.

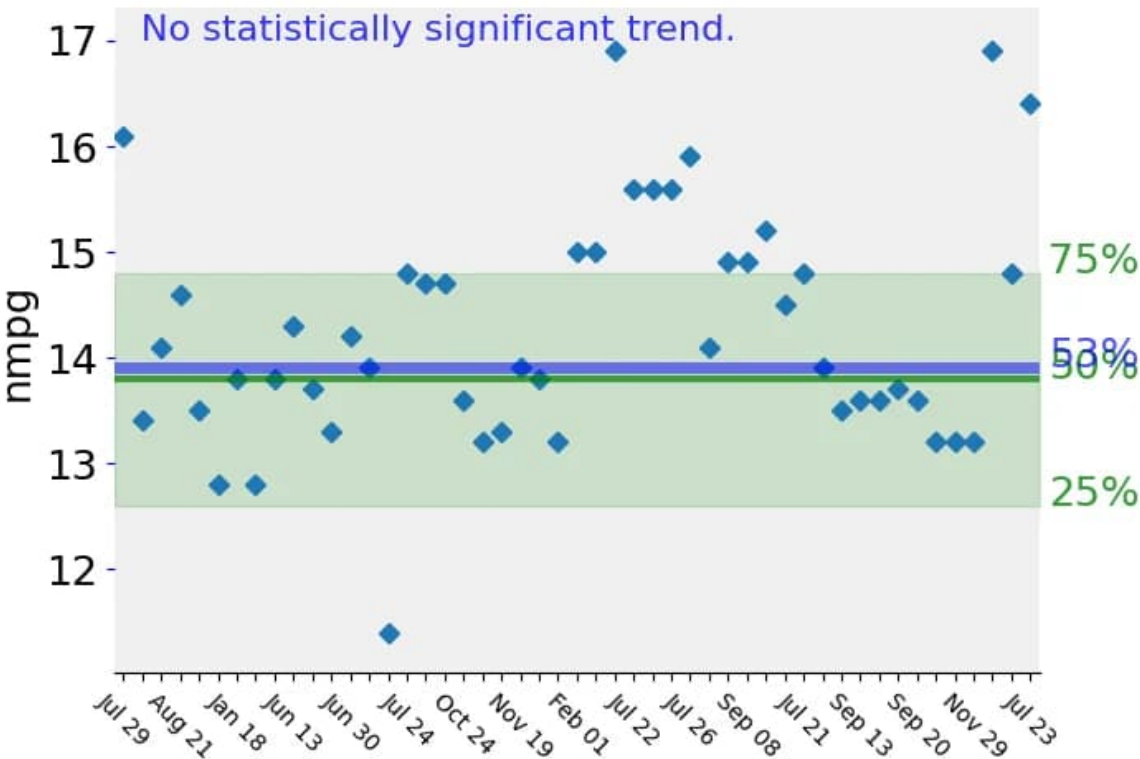


SAVVY SAYS...

Your aircraft's fuel efficiency is average when compared to your cohort.

MAXIMUM CHT DURING FLIGHT (DEG. F.)

Measures the maximum CHT attained during each flight, most likely during climb phase. Prolonged periods of high CHT can contribute to reduced cylinder life.

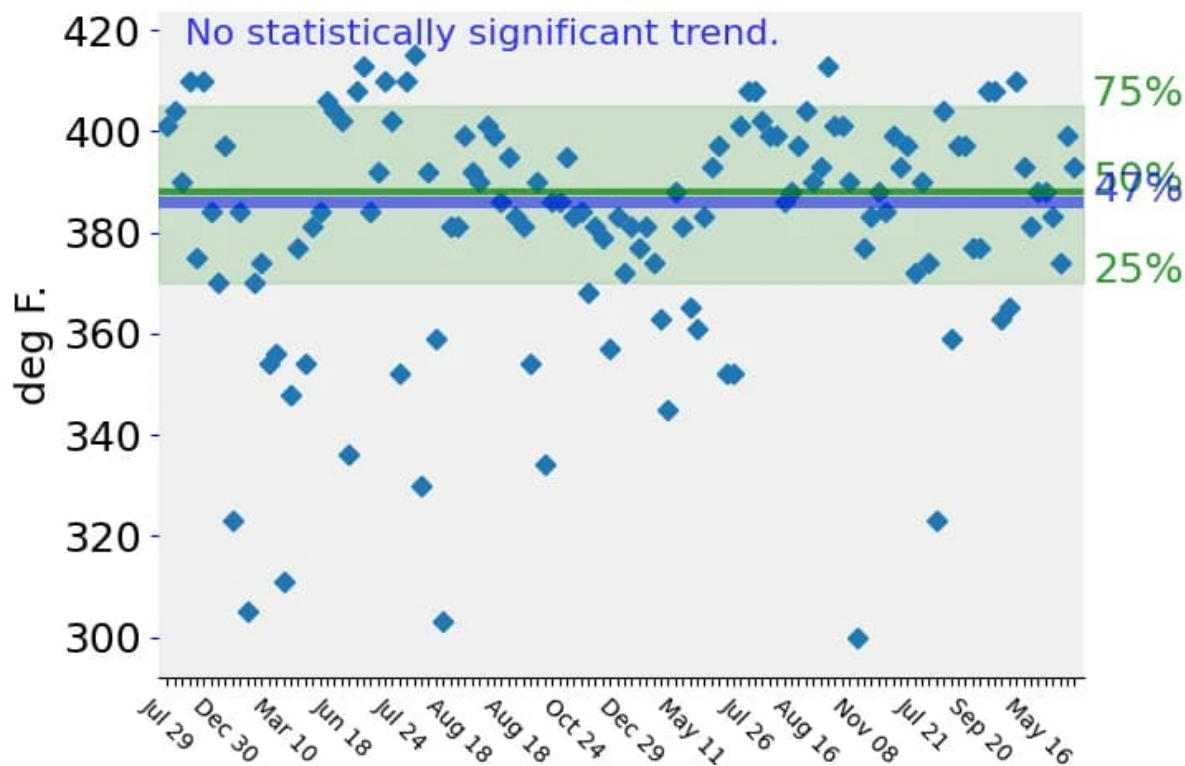


SAVVY SAYS...

Nice. The median of the maximum CHTs attained during your flights has been lower than 53% of the cohort. We think you can expect average longevity of your cylinders if you continue operating with your current power settings.

MAXIMUM CHT IN CRUISE (DEG. F.)

Measures the maximum cylinder head temperature (CHT) during the cruise phase of flight, an indication of the stress placed on your engine's reciprocating components. High CHT correlates with reduced longevity of cylinder assemblies.

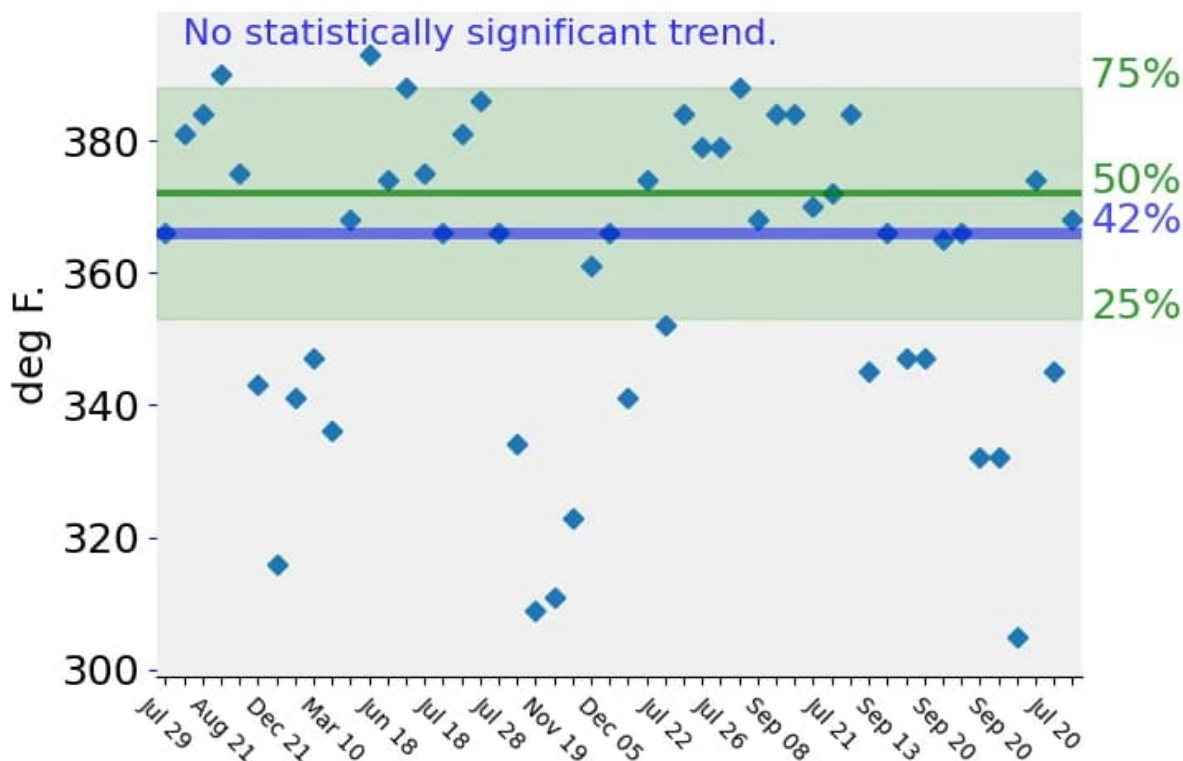


SAVVY SAYS...

Nice. Your cruise CHTs have been moderate, with a median value lower than 58% of the cohort. We think you can expect average longevity of your cylinders if you continue operating with your current leaning procedures and/or power settings.

MAXIMUM CHT SPREAD IN CRUISE (DEG. F.)

Measures the median temperature spread between your hottest and coolest cylinders at maximum CHT during cruise. The spread is an indication of mixture distribution and the adequacy of cooling airflow to all cylinders.

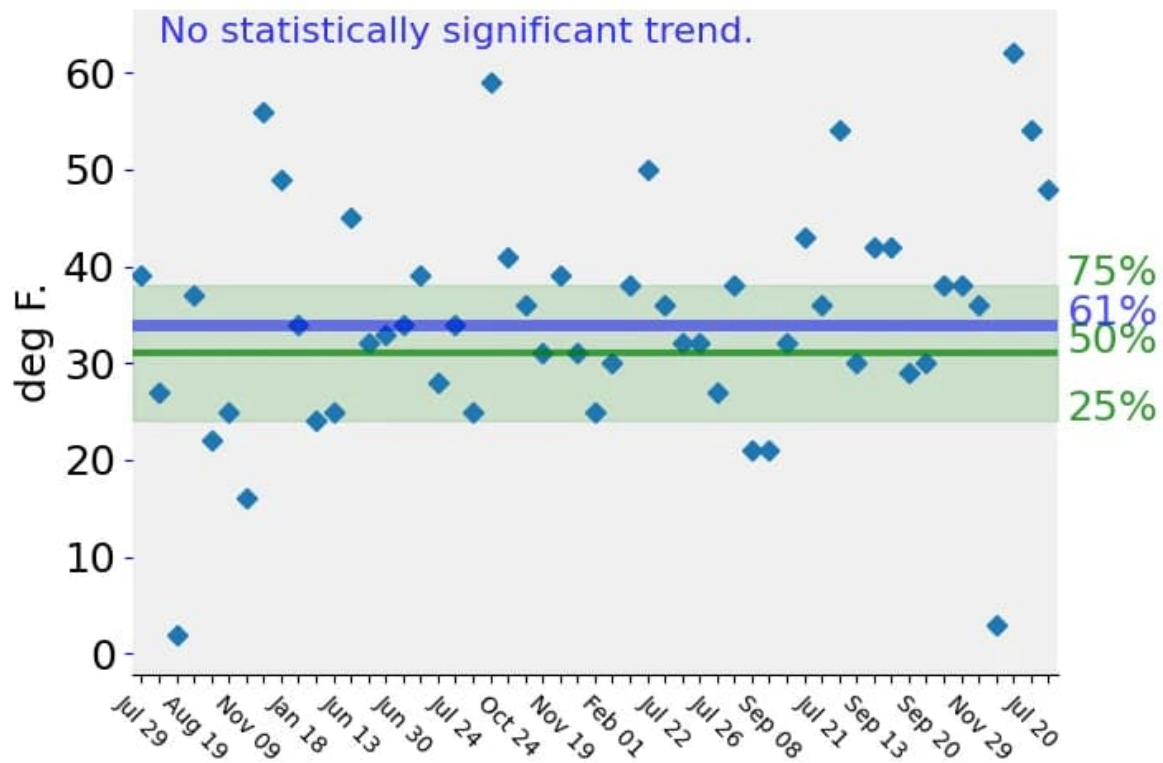


SAVVY SAYS...

The median value of the maximum CHT spread during cruise flights is higher than 61% of the cohort.


OIL PRESSURE IN CRUISE (PSI)

Measures the average oil pressures during cruise for your flights.

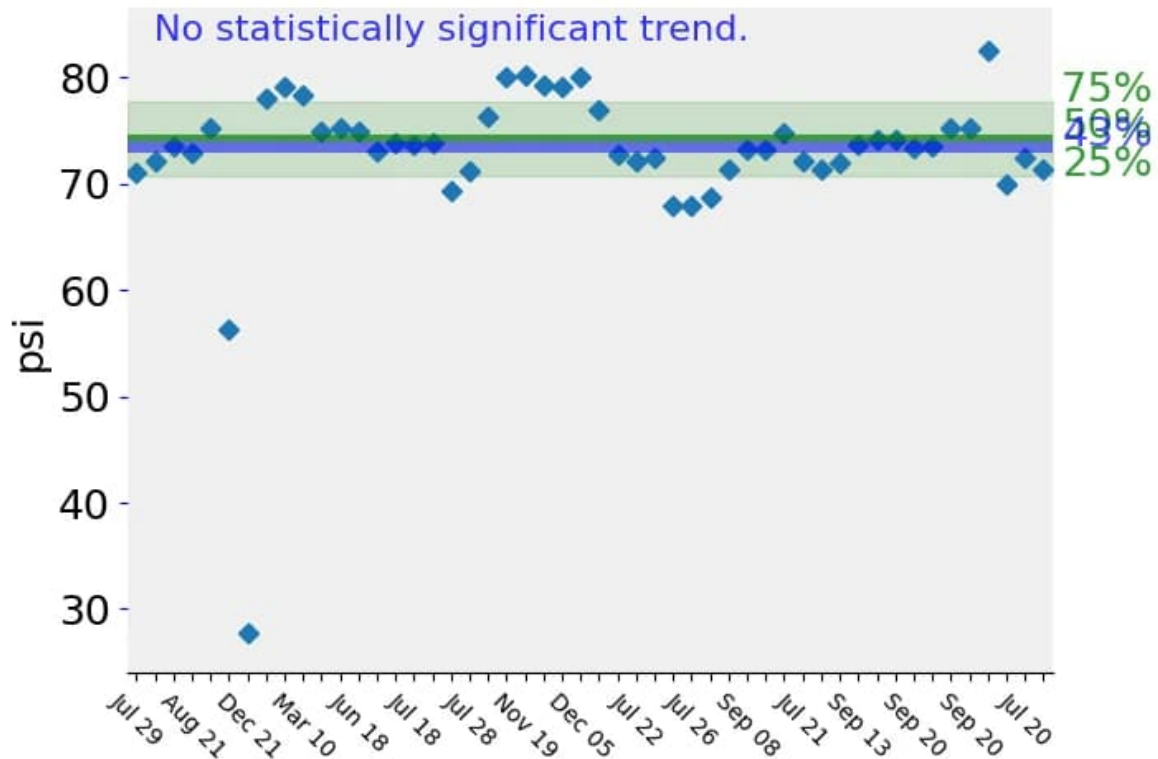

OIL TEMPERATURE IN CRUISE

Measures average oil temperature during cruise.

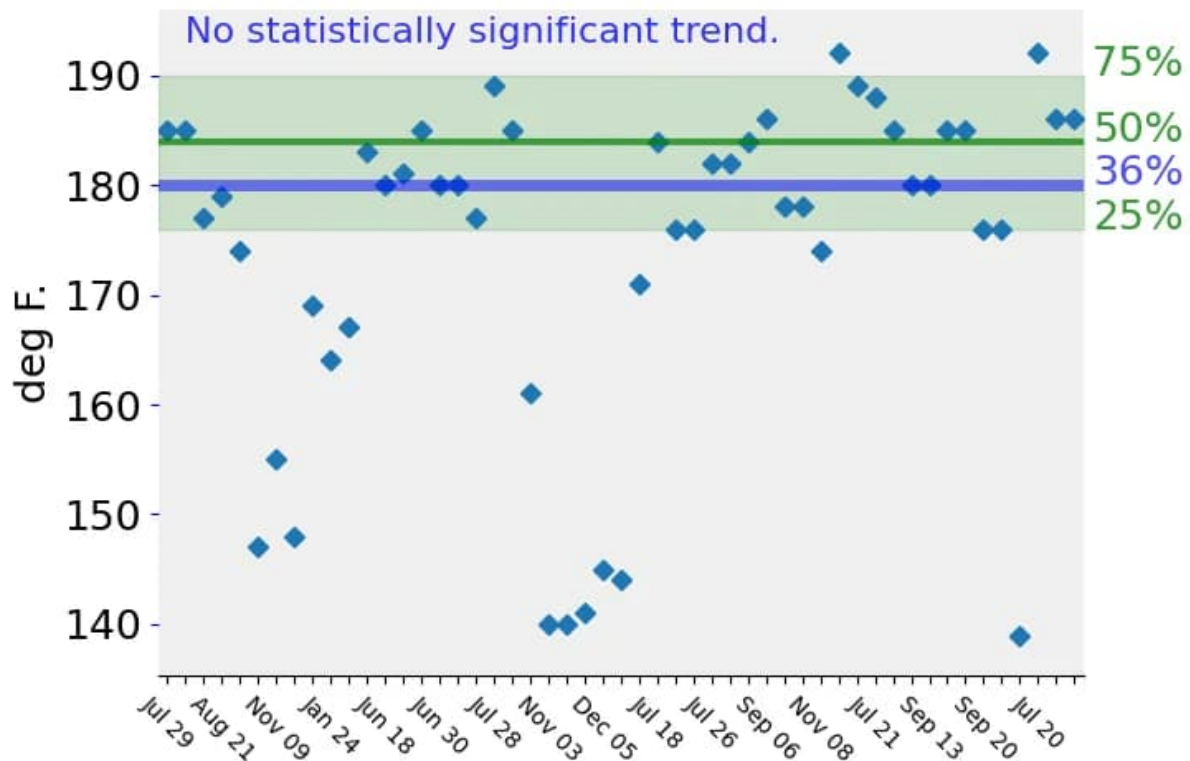


SAVVY SAYS...

The median of your average oil temperatures during cruise are about average when compared with the cohort. Your oil temperatures are in the normal range.

MAXIMUM FUEL FLOW DURING FLIGHT

Measures maximum fuel flow during flight, most likely during takeoff. Sufficient fuel flow is important for proper cylinder cooling during high power operations

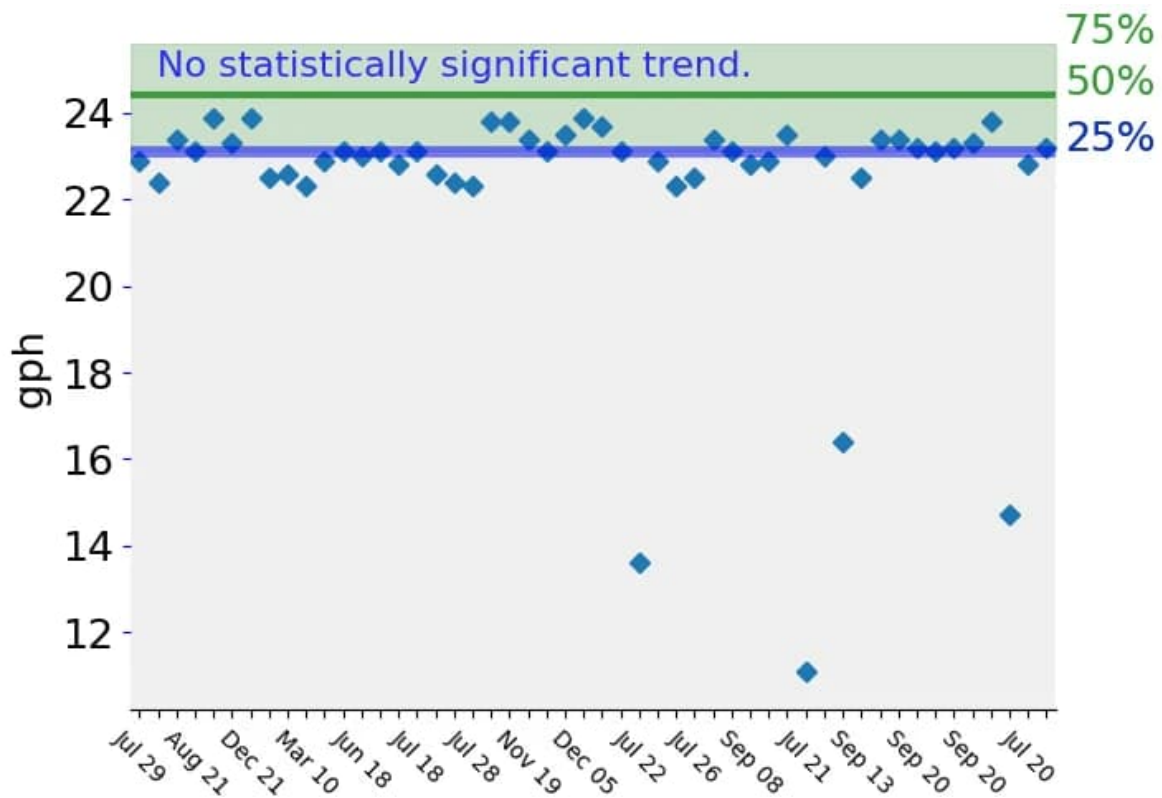


SAVVY SAYS...

Your maximum fuel flow is below average when compared with your cohort.

MAXIMUM RPM DURING FLIGHT

Measures maximum rpm during flight, most likely during takeoff. Maximum permitted RPM is necessary for the engine to develop full rated power during takeoff and in initial climb.

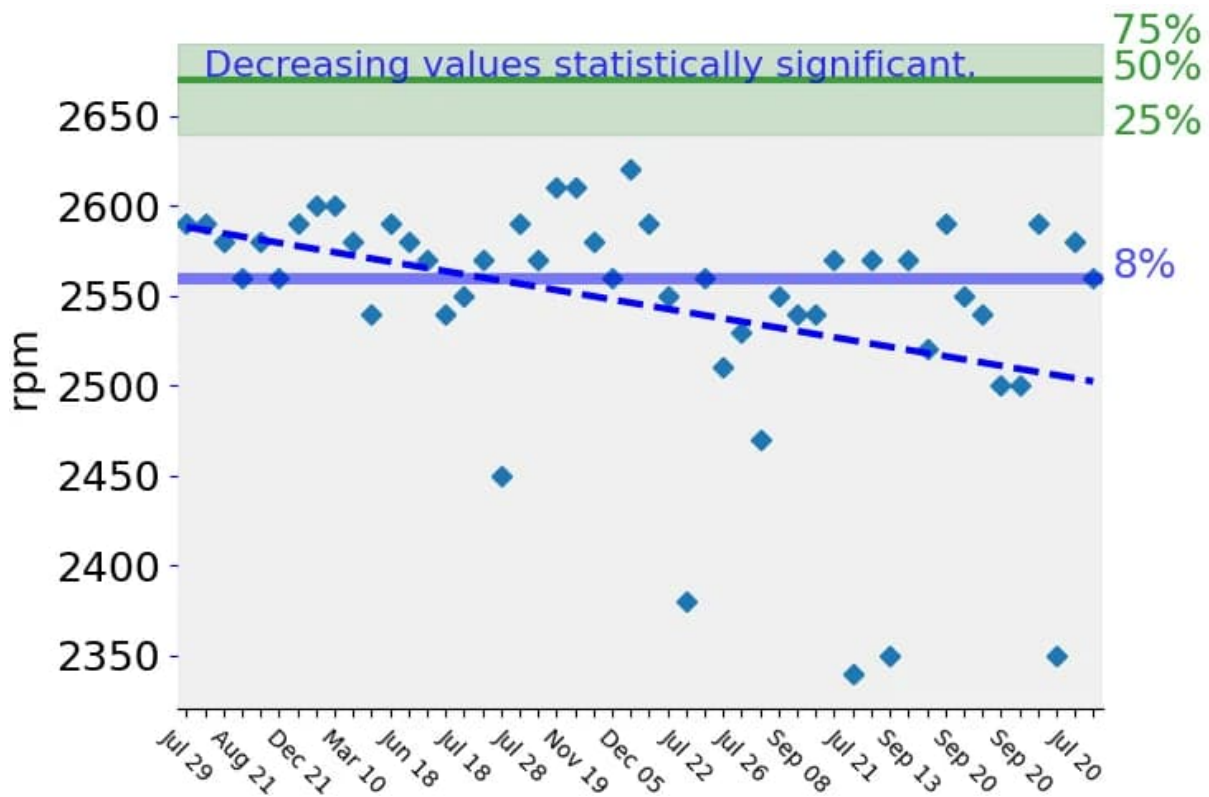


SAVVY SAYS...

Your maximum RPM is below average when compared with your cohort.

MAXIMUM MAP DURING FLIGHT

Measures maximum manifold pressure during flight, most likely during takeoff. Sufficient MAP, not to exceed redline, is necessary for the engine to develop full rated power during takeoff and initial climb

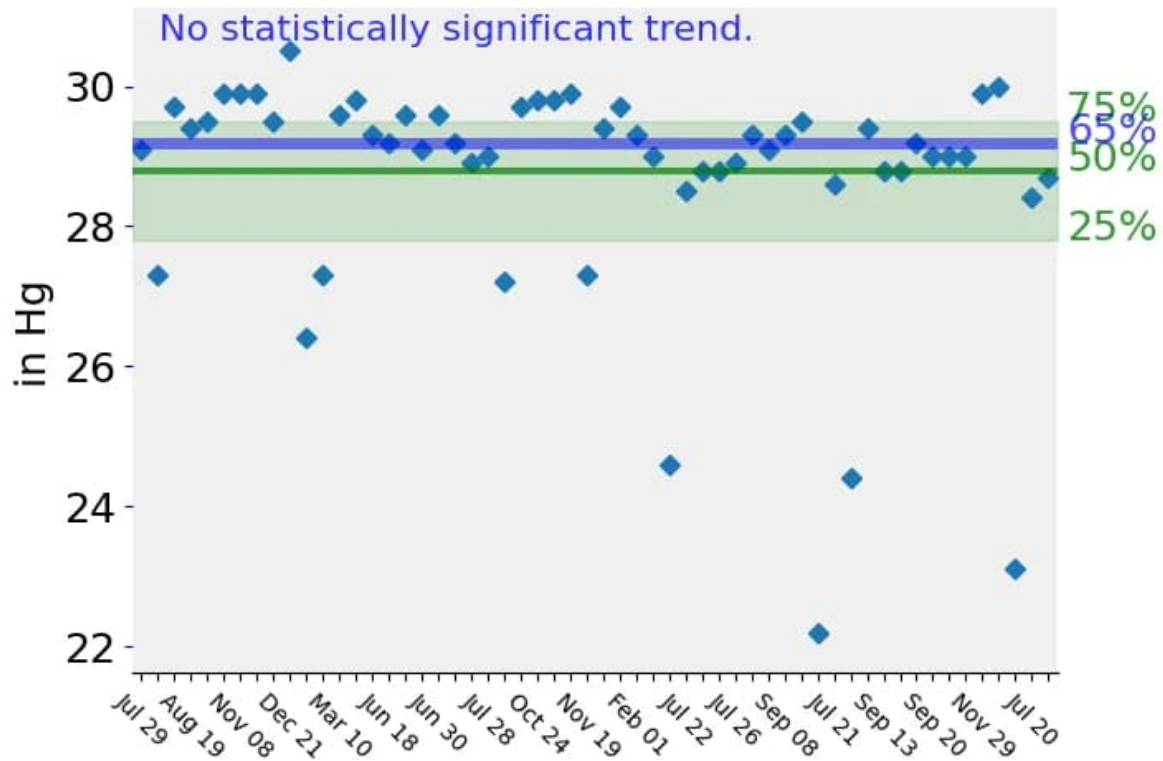


SAVVY SAYS...

Your maximum MAP is average when compared with your cohort.

INACTIVITY PERIODS (DAYS)

Measures the number of days your aircraft was inactive between flights. Inactivity can contribute to engine corrosion and reduced life of engine components.

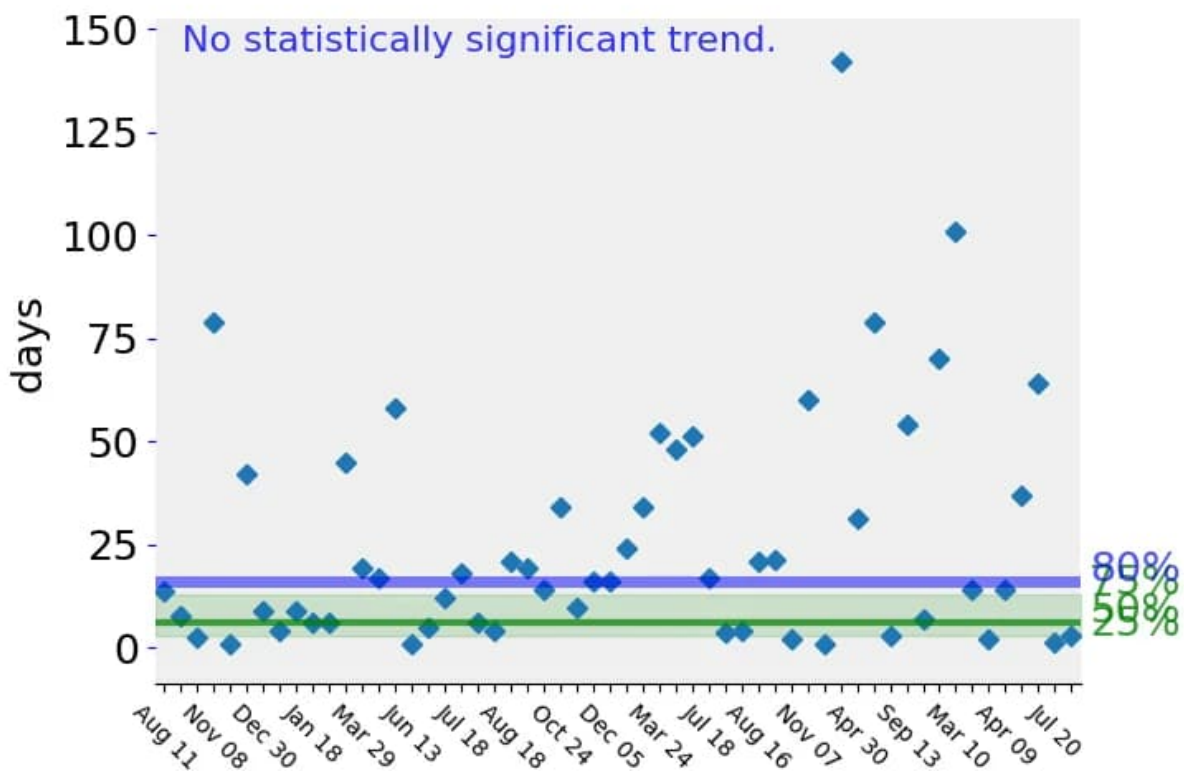

SAVVY SAYS...

Your engine has been inactive for periods of time longer than average. Savvy recommends flying more frequently.

This is the ground speed during cruise, if available. For a given true airspeed, higher ground speeds are a result of operating with more favorable winds.



Your ground speed is average when compared with your cohort.

For more information about the contents of this SavvyAnalysis Report Card and how to interpret it, see our [FAQ page](#).

If you have questions or comments, please [let us know](#).

Copyright SavvyAviation, Inc. All rights reserved.