



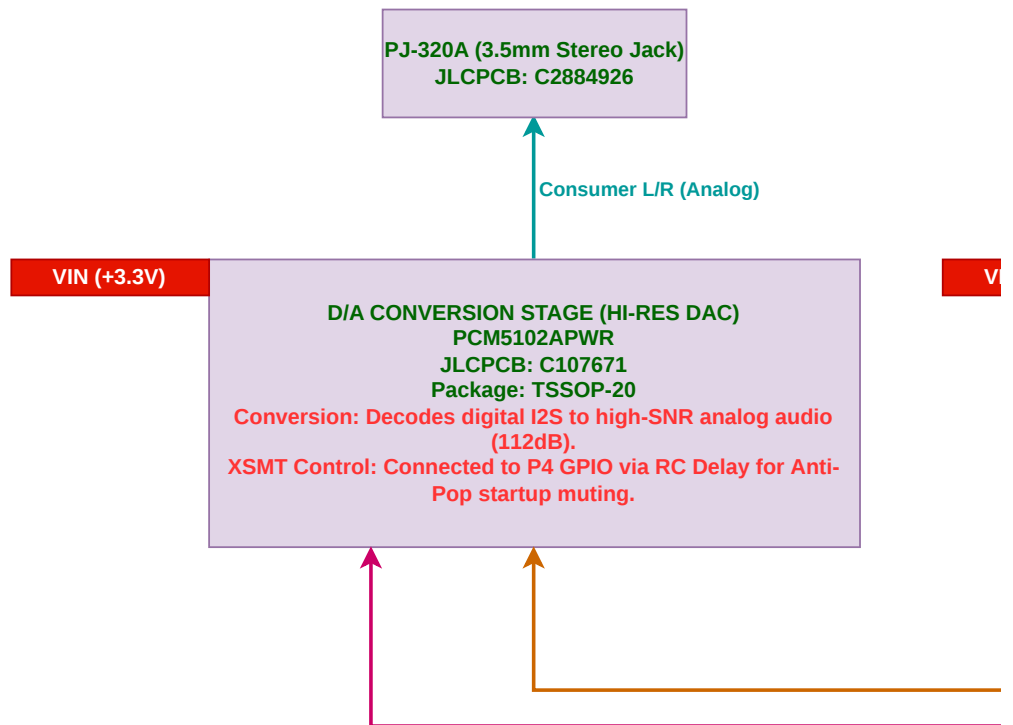

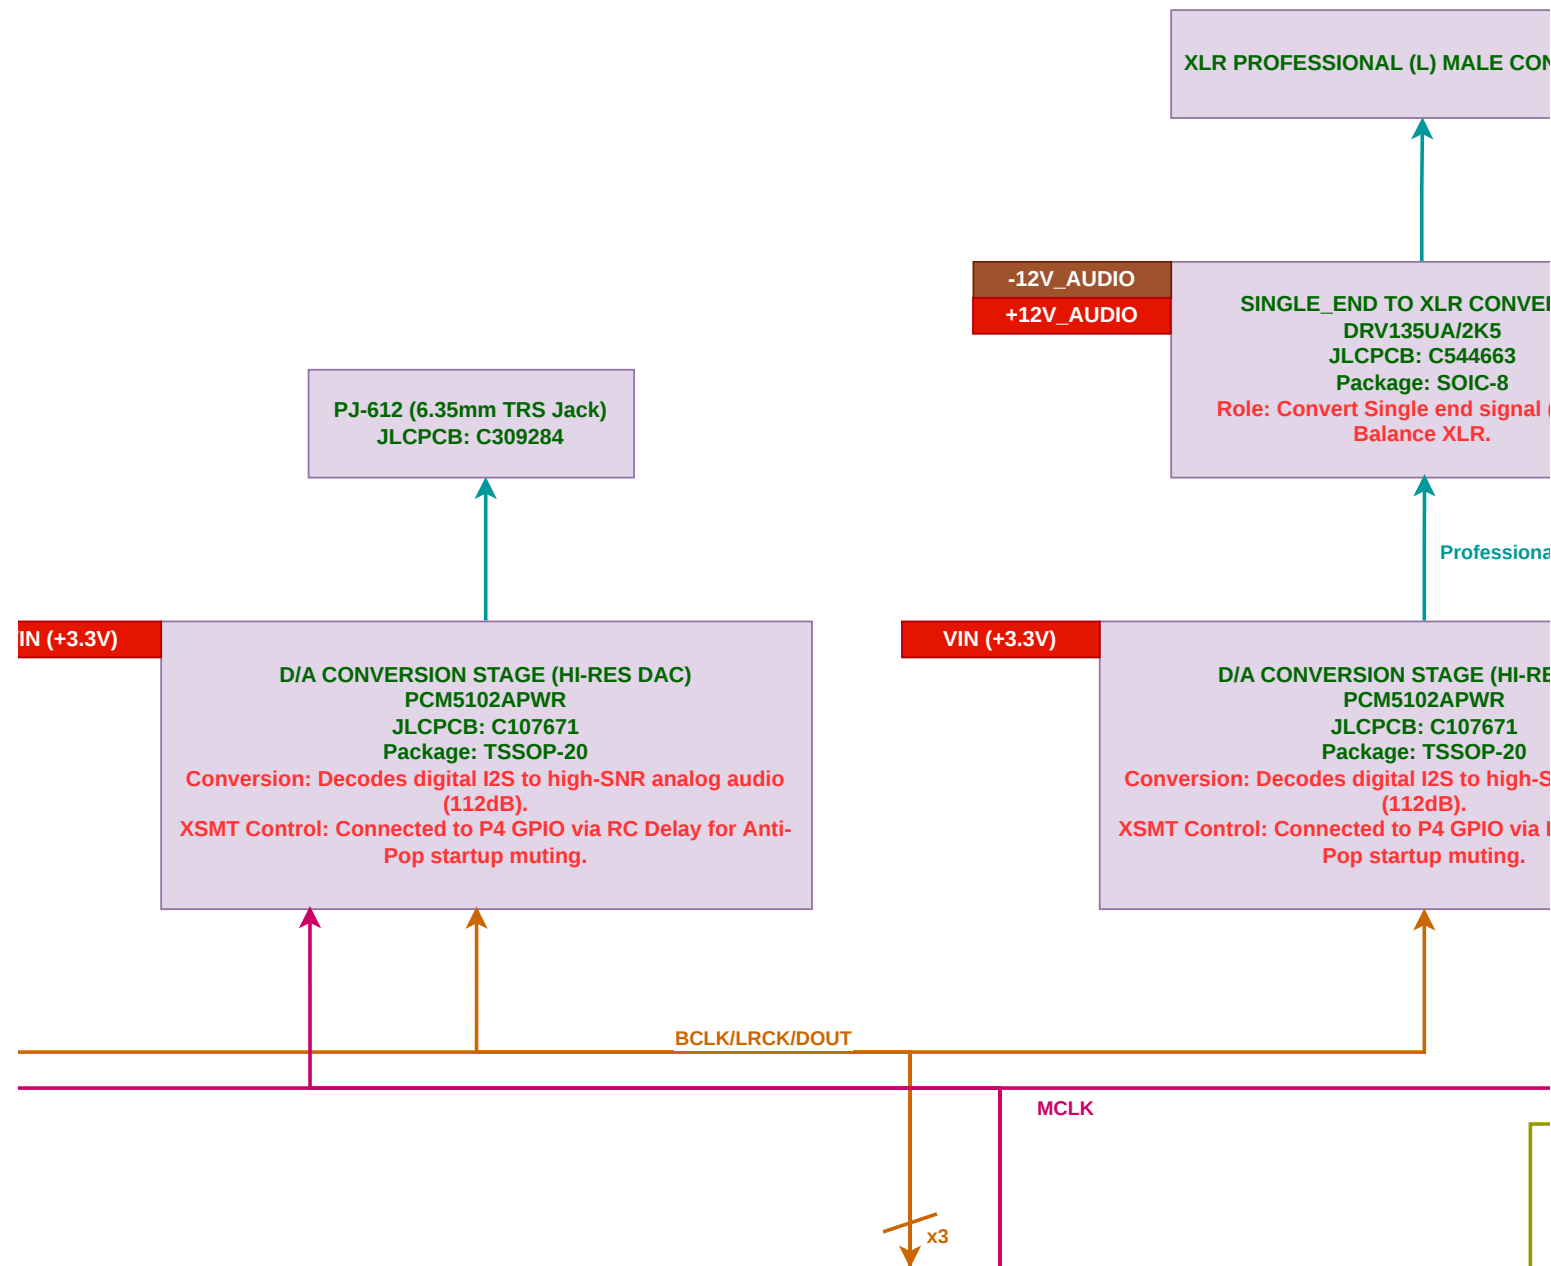

CONNECTORS

XLR PROFESSIONAL (R) MALE CONNECTORS

CONVERTER

(Left) to

SINGLE_END TO XLR CONVERTER
DRV135UA/2K5
JLCPCB: C544663
Package: SOIC-8
Role: Convert Single end signal (Right) to
Balance XLR.

-12V_AUDIO
+12V_AUDIO

analog L (Analog)

Professional R (Analog)

ANALOG DAC)


SNR analog audio
RC Delay for Anti-

VOL_GPIOA/B/SW

CN1_BUTTON



CN2_BUTTON


CN3_BUTTON

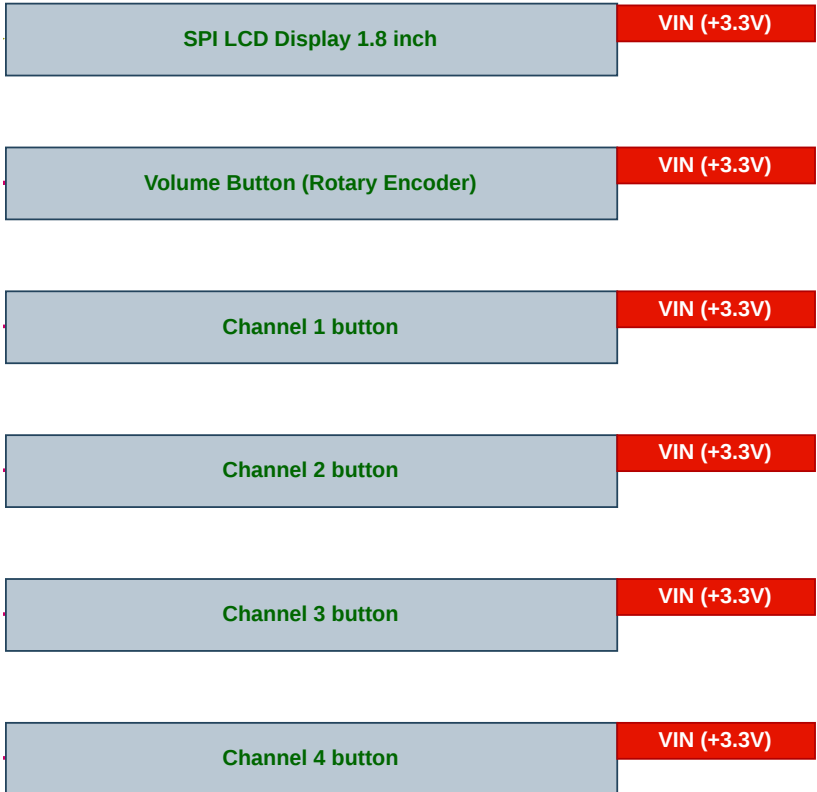


SIGNAL LEGEND:

	I2S (Audio Digital)	
	UART/USB (inter-MCU command)	
	Analog audio	
	Power rail	

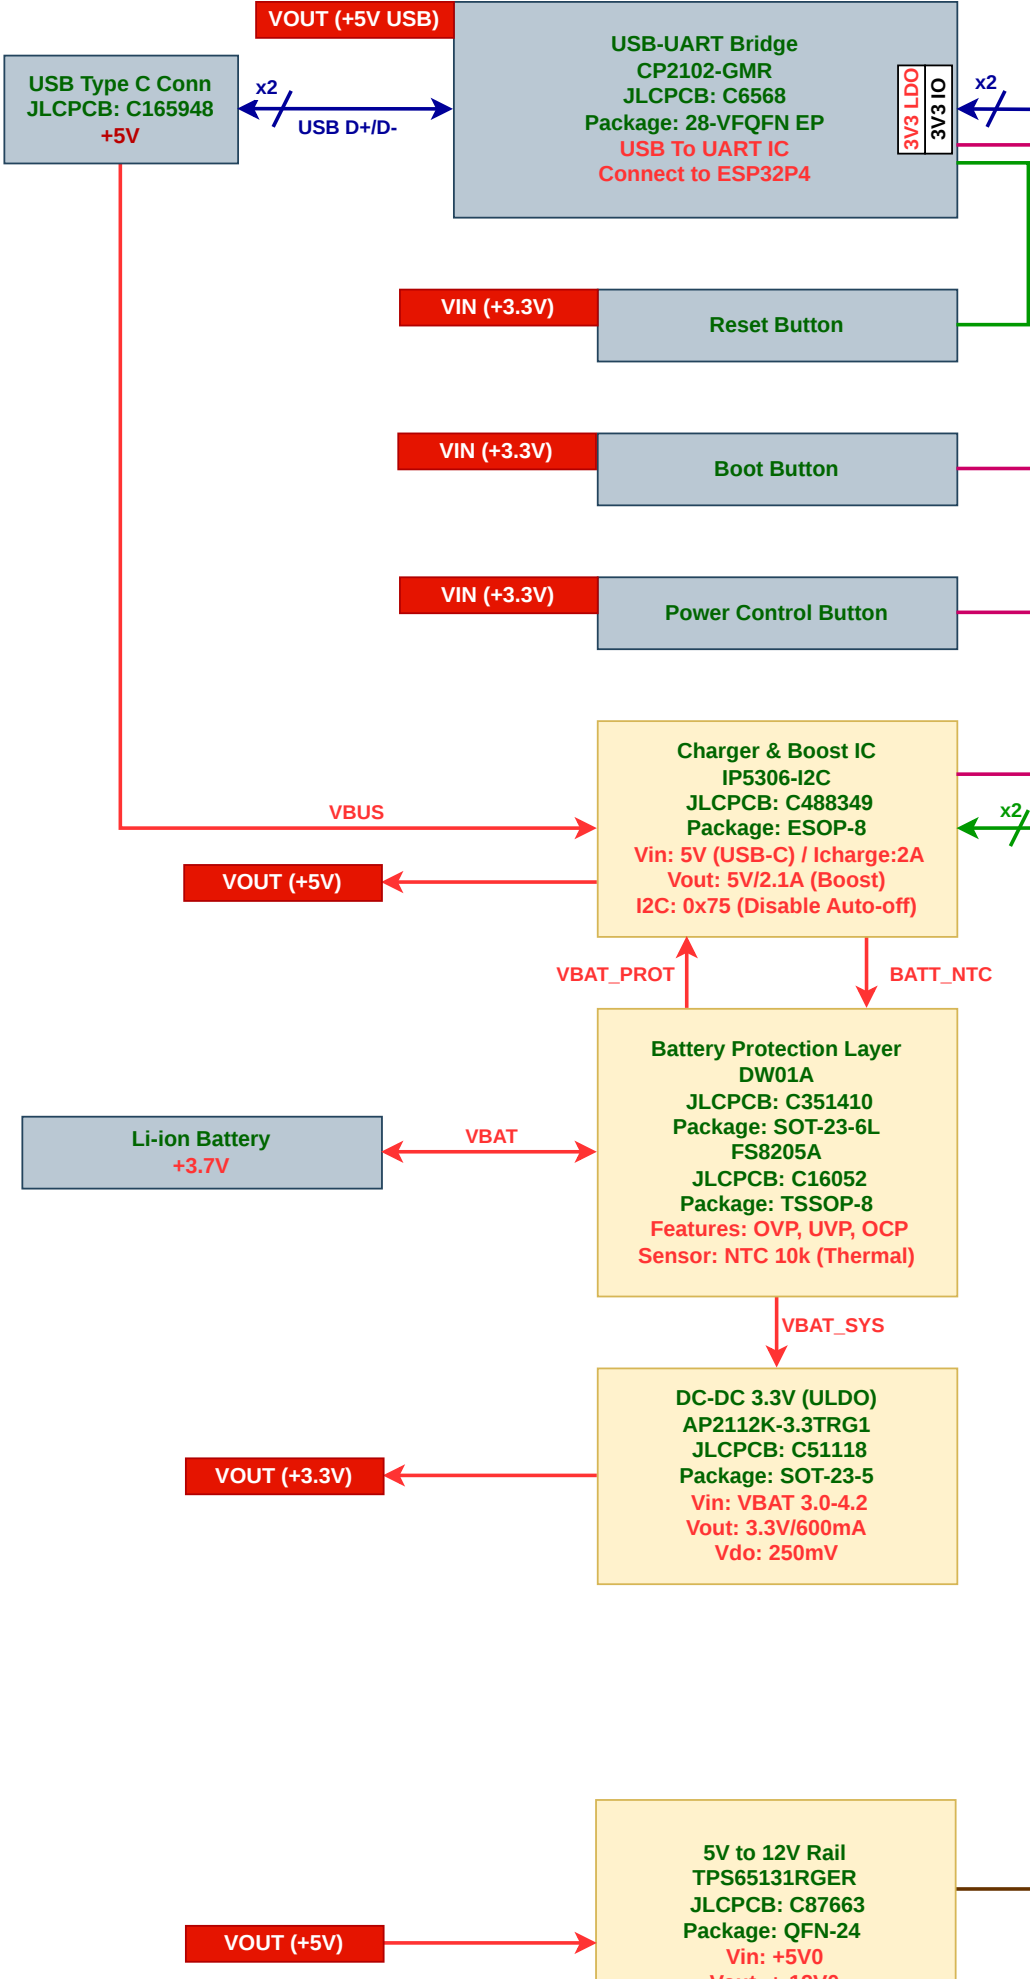

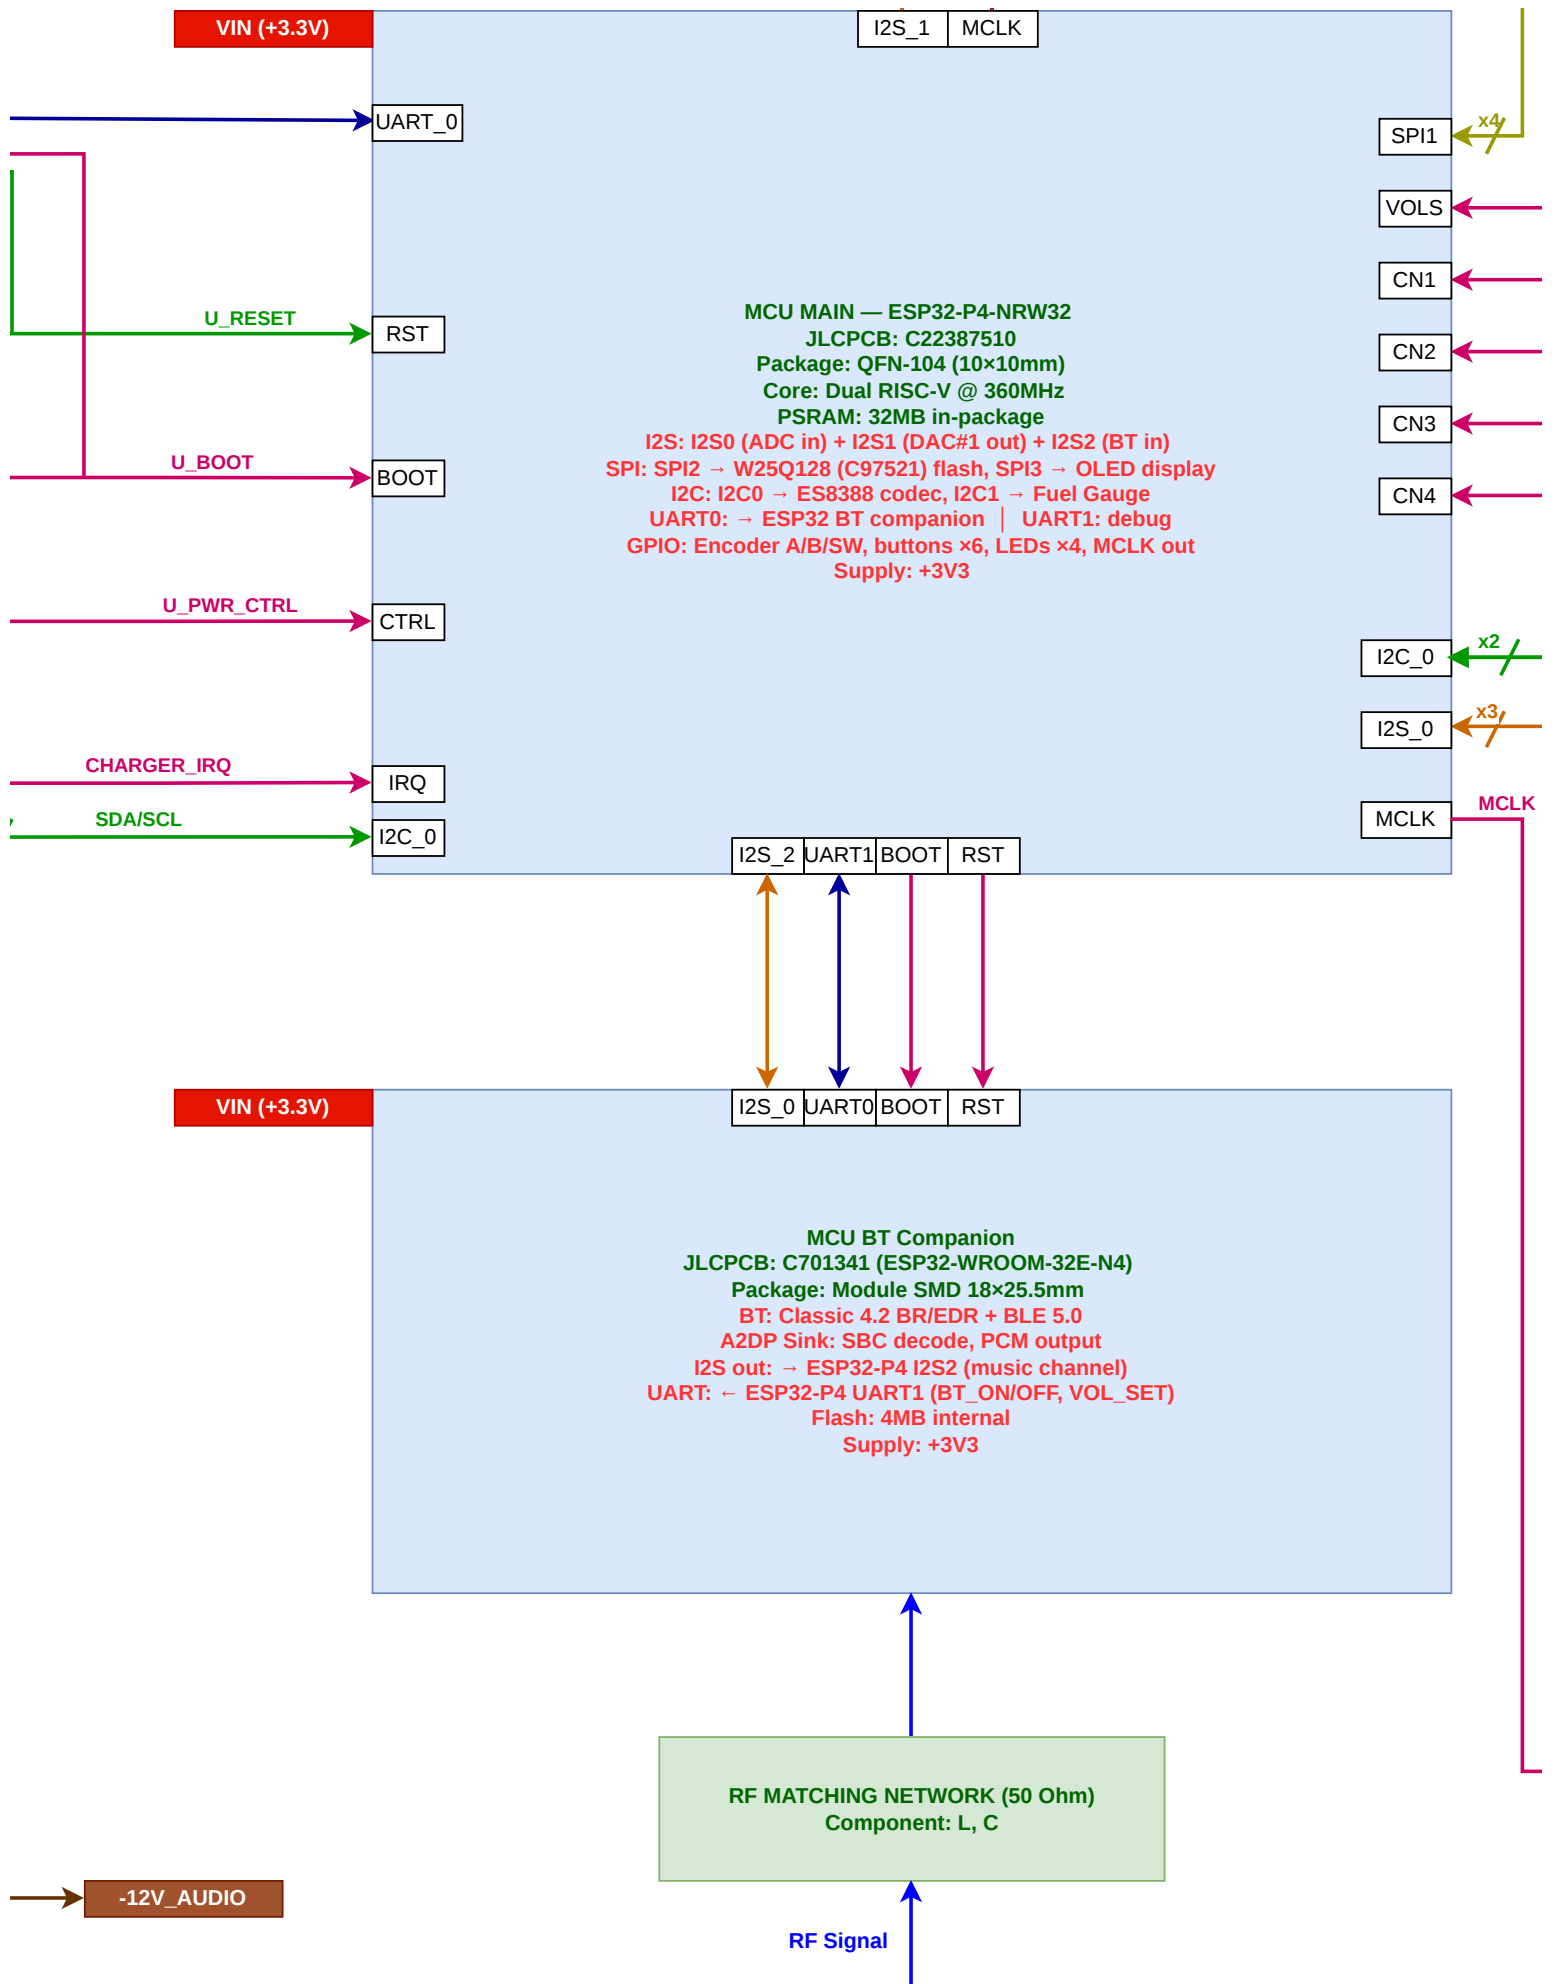

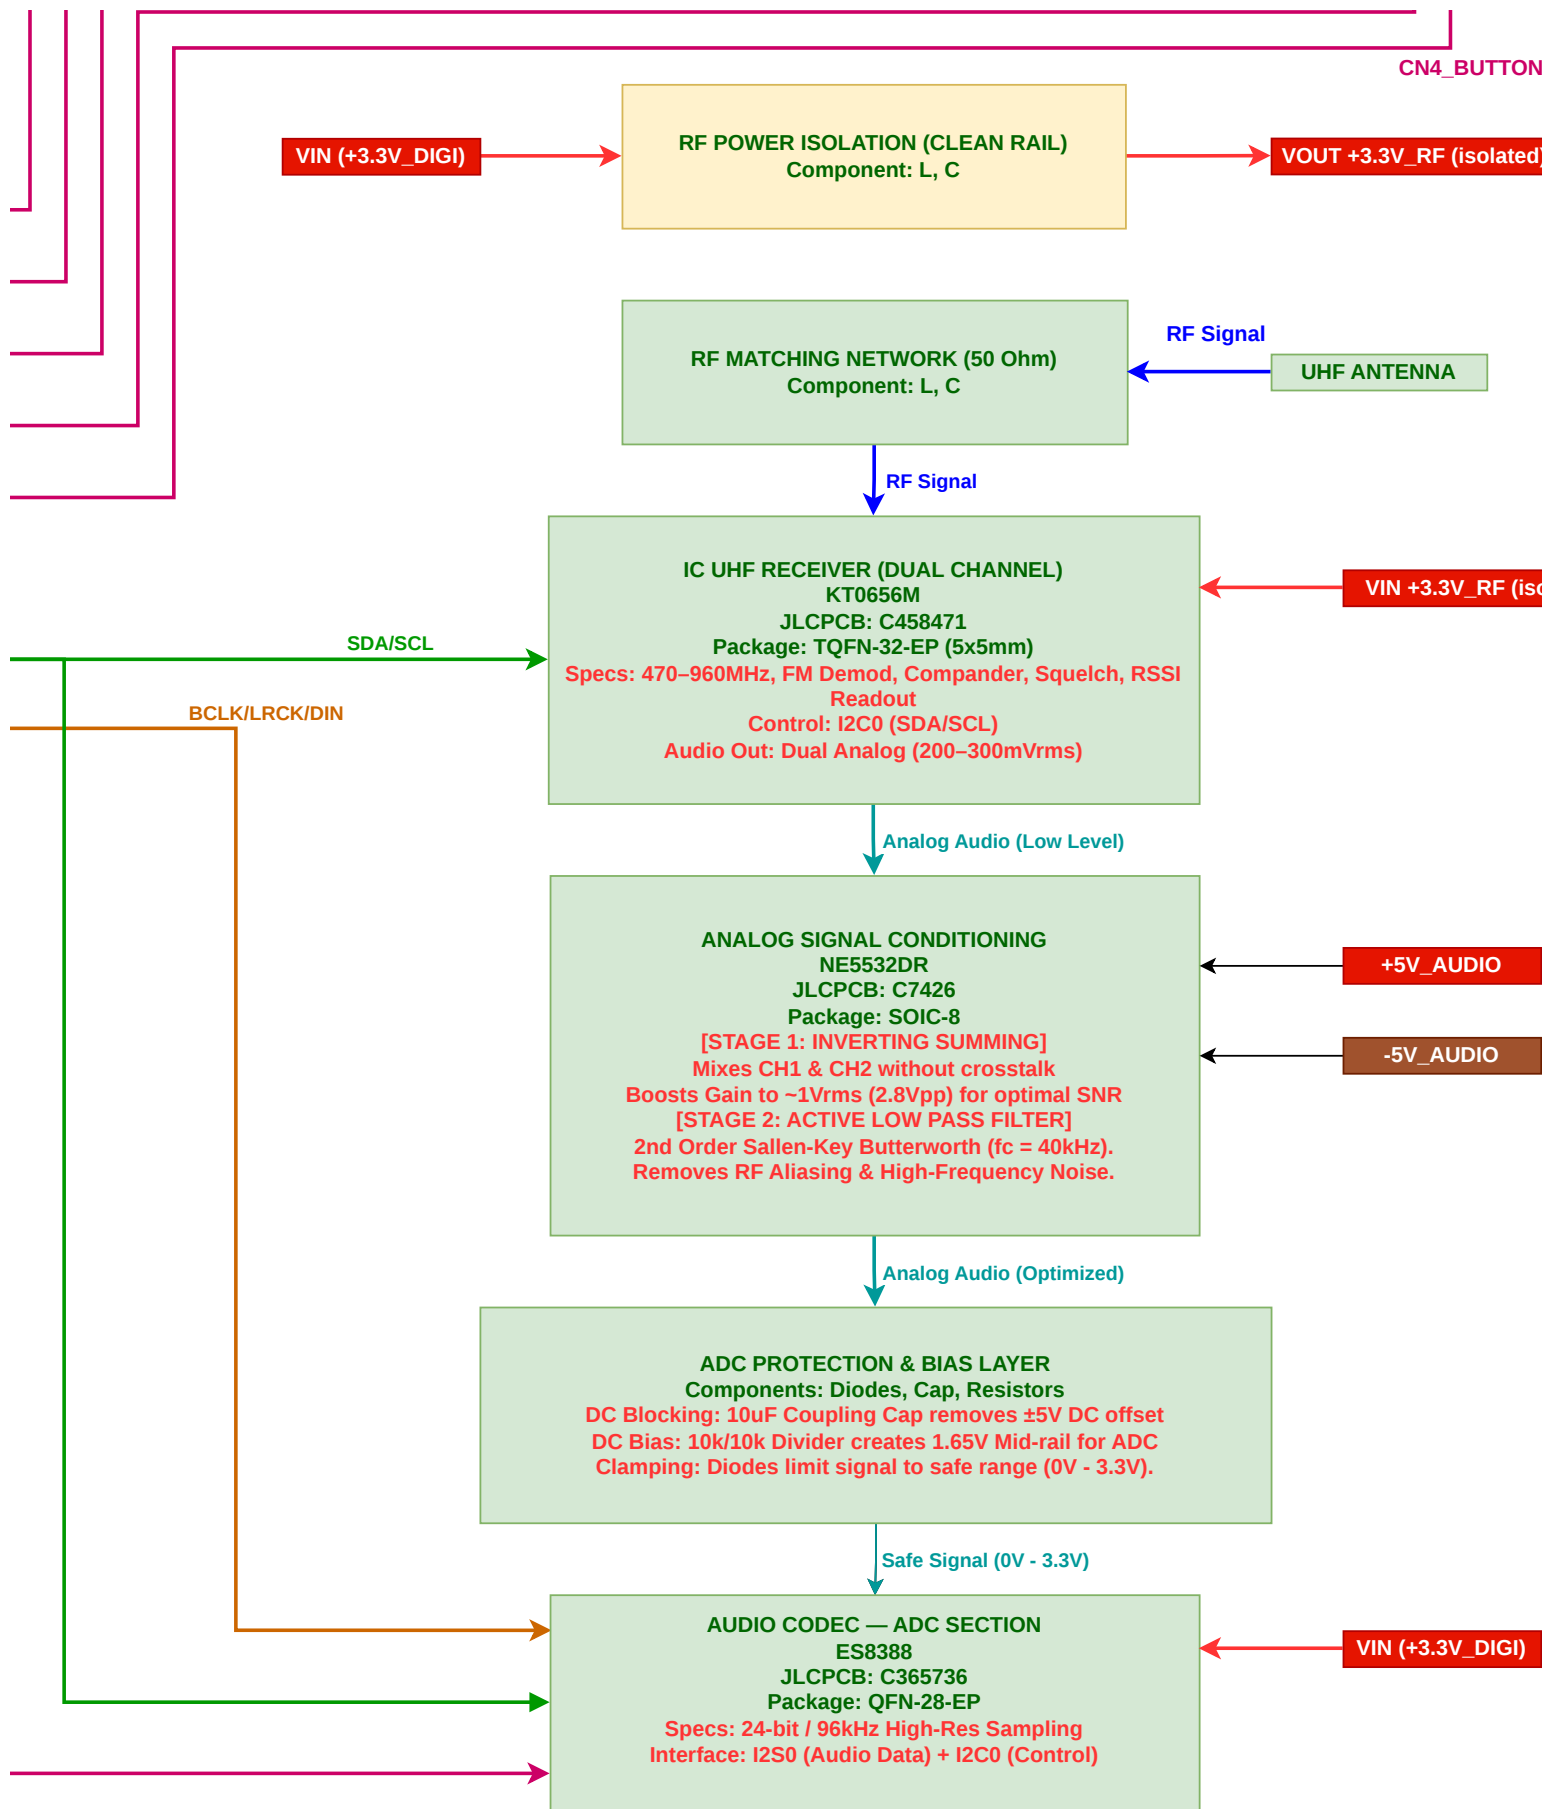

)

olated)

Vout: $\pm 12V_0$
Fsw: 250 kHz (Fixed)
Type: Charge Pump Inverter



+12V_AUDIO

BLE ANTENNA

