

Commercial





14	LED Flat Panels
19	LED Center Basket Lay-ins
21	LED Center Basket Relight Kits
22	LED Lensed Lay-ins
24	LED Surface Mount Wraparounds
27	LED Linear Flush Mount
29	LED Shoplights

CPX™



Features

- The smooth, even lens projects a clean and crisp aesthetic
- CPX is the perfect choice for a quality LED panel at an affordable price
- Great for budget-conscious school, commercial office, or small footprint retail projects

Check the DLC® qualified products list for the latest listings.




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity	CS
CPX 2X2 3200LM 35K M4	191848338537	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	3500K	80	120-277V	40	CS
CPX 2X2 3200LM 40K M4	191848338650	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	4000K	80	120-277V	40	CS
CPX 2X2 3200LM 50K M4	193048313642	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	5000K	80	120-277V	40	CS
CPX 2X4 4000LM 35K M2	191848338490	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	3500K	80	120-277V	20	CS
CPX 2X4 4000LM 40K M2	191848338506	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	4000K	80	120-277V	20	CS
CPX 2X4 4000LM 50K M2	193048313680	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	5000K	80	120-277V	20	CS




CS Denotes Contractor Select Product

Dimensions

2'x2'

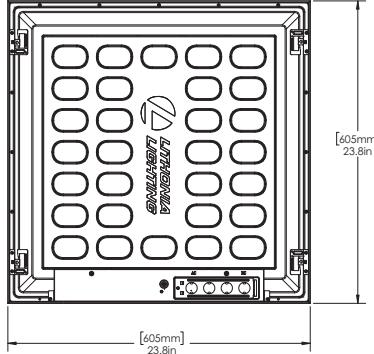

2'x4'

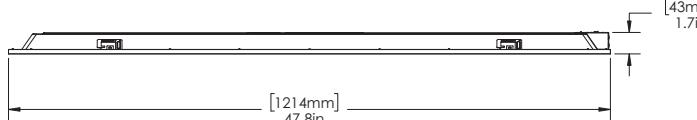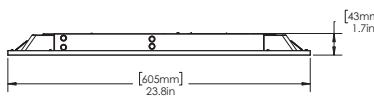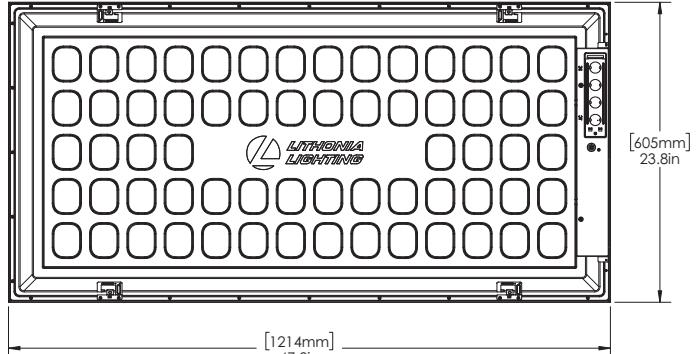

Features

- Suitable for many lighting applications including schools, offices, commercial spaces, retail, hospitals and other healthcare facilities
- Switchable Lumen feature provides flexibility, allowing the installer to adjust lumens conveniently on the jobsite
- Integral driver and deep-drawn housing design enables multiple mounting options including direct surface mount and suspension mount without fixture distortion
- Driver capable of 10% dimming
- High-performance, name brand LEDs provide more than 60,000 hours of reliable illumination



Check the DLC® qualified products list for the latest listings.

Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
CPANL 1X4 24/33/44LM 35K M4	191848338469	1'x4' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	3500K	>80	120-277V	64
CPANL 1X4 24/33/44LM 40K M4	191848338483	1'x4' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	4000K	>80	120-277V	64
CPANL 1X4 24/33/44LM 50K M4	191848338513	1'x4' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	5000K	>80	120-277V	64
CPANL 2X2 24/33/44LM 35K M4	191848338278	2'x2' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	3500K	>80	120-277V	56
CPANL 2X2 24/33/44LM 40K M4	191848338322	2'x2' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	4000K	>80	120-277V	56
CPANL 2X2 24/33/44LM 50K M4	191848338339	2'x2' Flat Panel	2 Lamp CF40	2,400/3,300/4,400	20/28/39W	5000K	>80	120-277V	56
CPANL 2X4 40/50/60LM 35K M2	191848338001	2'x4' Flat Panel	4 Lamp 32W T8	4,000/5,000/6,000	32/42/52W	3500K	>80	120-277V	28
CPANL 2X4 40/50/60LM 40K M2	191848338230	2'x4' Flat Panel	4 Lamp 32W T8	4,000/5,000/6,000	32/42/53W	4000K	>80	120-277V	28
CPANL 2X4 40/50/60LM 50K M2	191848338315	2'x4' Flat Panel	4 Lamp 32W T8	4,000/5,000/6,000	32/42/53W	5000K	>80	120-277V	28

Denotes Contractor Select Product

Accessories


Catalog Number	UPC	Description
PAC 2DNF 36	193048462517	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 36 inches
PAC 2DF 36	193048462999	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 36 inches
PAC 4DNF 36	193048462982	Panel Air Craft Kit, 4 cables, No Power Feed, 36 inches
PAC 4DF 36	193048463064	Panel Air Craft Kit, 4 cables, with Power Feed, 36 inches
PAC 2DNF 72	193048463101	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 72 inches
PAC 2DF 72	193048463477	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 72 inches
PAC 4DNF 72	193048463491	Panel Air Craft Kit, 4 cables, No Power Feed, 72 inches
PAC 4DF 72	193048463521	Panel Air Craft Kit, 4 cables, with Power Feed, 72 inches
1X4SMKSHP PAF	191848560587	1'x4' Ceiling Flush Mount Kit
2X2SMKSHP PAF	191848560600	2'x2' Ceiling Flush Mount Kit
2X4SMKSHP PAF	191848560648	2'x4' Ceiling Flush Mount Kit

Dimensions

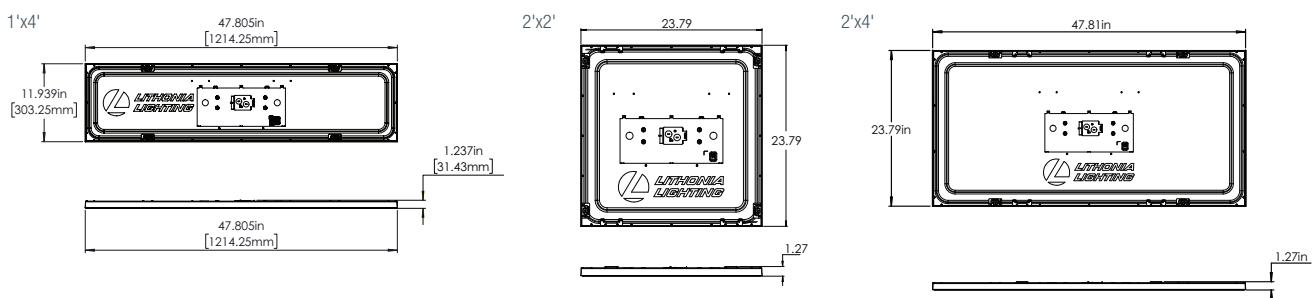

Certain airborne contaminants can diminish integrity of acrylic. See page 174 for Acrylic Compatibility table for suitable uses.

EPANL

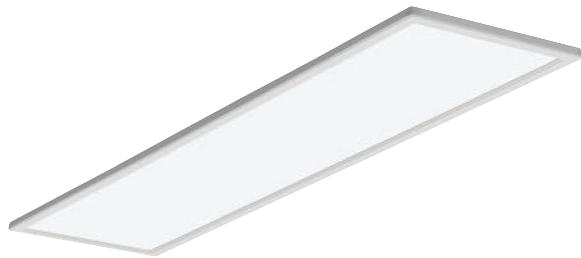

Features

- Suitable for many lighting applications including schools, offices and other commercial spaces, retail and convenience stores, hospitals and other healthcare facilities
- Long-life LEDs designed to maintain 70% of their lumen output at 60,000 hours
- Standard 0-10V dimming driver that dims to 10%
- Surface mount and suspension mount kit options available


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
EPANL 14 40L 35K	190887602739	1'x4' LED Flat Panel	2 Lamp 32W T8	4,000	39W	3500K	82	120-277V	26
EPANL 14 40L 40K	190887602753	1'x4' LED Flat Panel	2 Lamp 32W T8	4,000	39W	4000K	82	120-277V	26
EPANL 14 40L 50K	191723811605	1'x4' LED Flat Panel	2 Lamp 32W T8	4,000	39W	5000K	82	120-277V	26
EPANL 22 34L 35K M4	193048290165	2'x2' LED Flat Panel	2 U-Bent 32W T8	3,400	31W	3500K	82	120-277V	48
EPANL 22 34L 40K M4	193048027761	2'x2' LED Flat Panel	2 U-Bent 32W T8	3,400	31W	4000K	82	120-277V	48
EPANL 22 34L 50K	191723811650	2'x2' LED Flat Panel	2 U-Bent 32W T8	3,400	31W	5000K	82	120-277V	52
EPANL 24 40L 35K M2	193048290172	2'x4' LED Flat Panel	3 Lamp 32W T8	4,000	39W	3500K	82	120-277V	24
EPANL 24 40L 40K M2	193048027822	2'x4' LED Flat Panel	3 Lamp 32W T8	4,000	39W	4000K	82	120-277V	24
EPANL 24 40L 50K	191723812312	2'x4' LED Flat Panel	3 Lamp 32W T8	4,000	39W	5000K	82	120-277V	26

Accessories

Catalog Number	UPC	Description
PAC 2DNF 36	193048462517	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 36 inches
PAC 2DF 36	193048462999	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 36 inches
PAC 4DNF 36	193048462982	Panel Air Craft Kit, 4 cables, No Power Feed, 36 inches
PAC 4DF 36	193048463064	Panel Air Craft Kit, 4 cables, with Power Feed, 36 inches
PAC 2DNF 72	193048463101	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 72 inches
PAC 2DF 72	193048463477	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 72 inches
PAC 4DNF 72	193048463491	Panel Air Craft Kit, 4 cables, No Power Feed, 72 inches
PAC 4DF 72	193048463521	Panel Air Craft Kit, 4 cables, with Power Feed, 72 inches
1X4SMKSH	191848505786	1'x4' Surface Mount Troffer Kit
2X2SMKSH	191848505571	2'x2' Surface Mount Troffer Kit
2X4SMKSH	191848505762	2'x4' Surface Mount Troffer Kit

Dimensions

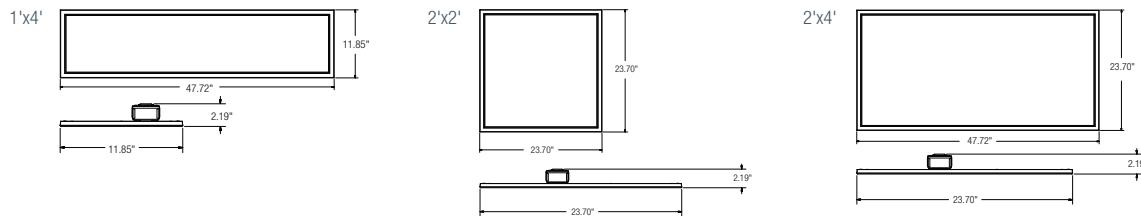

Certain airborne contaminants can diminish integrity of acrylic. See page 174 for Acrylic Compatibility table for suitable uses.





WELCOME

EXIT

Features

- Ideal for lighting environments such as schools, offices, retail, healthcare facilities and other commercial spaces
- Popular center basket design with square or round lens
- Slim 2-3/8" profile fits restrictive plenums and optimizes pallet space
- Standard 0-10V dimming driver that dims to 10%
- Designed to provide 80% lumen maintenance at 60,000 hours



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
BLC 2X2 3300LM 35K	191848536469	2'x2' Center Basket LED Lay-in with Square Lens	2 U-Bent 32W T8	3,300	30W	3500K	80	120-277V	52
BLC 2X2 3300LM 40K	191848536506	2'x2' Center Basket LED Lay-in with Square Lens	2 U-Bent 32W T8	3,300	30W	4000K	80	120-277V	52
BLC 2X2 4000LM 35K	191848536544	2'x2' Center Basket LED Lay-in with Square Lens	2 U-Bent 32W T8	4,000	36W	3500K	80	120-277V	52
BLC 2X2 4000LM 40K	191848536551	2'x2' Center Basket LED Lay-in with Square Lens	2 U-Bent 32W T8	4,000	36W	4000K	80	120-277V	52
BLC 2X4 4000LM 35K	191848536575	2'x4' Center Basket LED Lay-in with Square Lens	2 Lamp 32W T8	4,000	32W	3500K	80	120-277V	26
BLC 2X4 4000LM 40K	191848536629	2'x4' Center Basket LED Lay-in with Square Lens	2 Lamp 32W T8	4,000	32W	4000K	80	120-277V	26
BLC 2X4 5000LM 35K	191848536636	2'x4' Center Basket LED Lay-in with Square Lens	2 Lamp 32W T8	5,000	43W	3500K	80	120-277V	26
BLC 2X4 5000LM 40K	191848536599	2'x4' Center Basket LED Lay-in with Square Lens	2 Lamp 32W T8	5,000	43W	4000K	80	120-277V	26
BLC 2X2 3300LM 35K ADSM	193048323177	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	3,300	30W	3500K	80	120-277V	52
BLC 2X2 3300LM 40K ADSM	193048323269	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	3,300	30W	4000K	80	120-277V	52
BLC 2X2 4000LM 35K ADSM	193048323399	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	4,000	36W	3500K	80	120-277V	52
BLC 2X2 4000LM 40K ADSM	193048323382	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	4,000	36W	4000K	80	120-277V	52
BLC 2X4 4000LM 35K ADSM	193048323443	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	4,000	32W	3500K	80	120-277V	26
BLC 2X4 4000LM 40K ADSM	193048323511	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	4,000	32W	4000K	80	120-277V	26
BLC 2X4 5000LM 35K ADSM	193048323535	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	5,000	43W	3500K	80	120-277V	26
BLC 2X4 5000LM 40K ADSM	193048323528	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	5,000	43W	4000K	80	120-277V	26
BLC 2X2 3300LM 80CRI 35K ADSM MIN10 ZT MVOLT EL14L	193048323191	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	3,300	30W	3500K	80	120-277V	52
BLC 2X2 3300LM 80CRI 40K ADSM MIN10 ZT MVOLT EL14L	193048323351	2'x2' Center Basket LED Lay-in with Round Lens	2 U-Bent 32W T8	3,300	30W	4000K	80	120-277V	52
BLC 2X4 4000LM 80CRI 35K ADSM MIN10 ZT MVOLT EL14L	193048323429	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	4,000	32W	3500K	80	120-277V	26
BLC 2X4 4000LM 80CRI 40K ADSM MIN10 ZT MVOLT EL14L	193048323504	2'x4' Center Basket LED Lay-in with Round Lens	2 Lamp 32W T8	4,000	32W	4000K	80	120-277V	26


Denotes Contractor Select Product

Accessories

Catalog Number	UPC	Description
DGA24	784231089217	Drywall Grid Adapter for 2'x4' Recessed Fixture
DGA22	784231093818	Drywall Grid Adapter for 2'x2' Recessed Fixture
2X4SMKSHP PAF	193047794312	2'x4' Surface Mount Troffer Kit
2X2SMKSHP PAF	193047794299	2'x2' Surface Mount Troffer Kit
PS1050	888791760071	LED Emergency Battery Pack, 10W 50VDC (Non CEC Compliant)
PS1055LCP	191723518283	LED Emergency Battery Pack, 10W Constant Power, Self-Diagnostic, CEC compliant
ELA PSRME IC	889804999143	Remote Enclosure for Battery for Insulated Ceiling

Dimensions


BLC 2'x4' Length: 47-3/4 (121.2)



BLC 2'x2' Length: 23-3/4 (60.3)

Width: 23-3/4 (60.3)

Depth: 2-3/8 (6.0) All dimensions are inches (centimeters) unless otherwise specified.



Certain airborne contaminants can diminish integrity of acrylic. See page 174 for Acrylic Compatibility table for suitable uses.

BLT



Features

- Ideal for lighting environments such as schools, offices and other commercial spaces, hospitals and other healthcare facilities
- Low-profile design (2-3/8" deep)
- Designed to provide 80% lumen maintenance at 60,000 hours
- Standard 0-10V dimming driver that dims to 10%
- Compatible with nLight® controls for networked operation




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
2BLT4 40L ADP LP835	190887470789	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	31W	3500K	82	120-277V	28
2BLT4 40L ADP LP840	190887470765	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	31W	4000K	82	120-277V	28
2BLT4 46L ADP LP835	190887468656	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,600	38W	3500K	82	120-277V	28
2BLT4 46L ADP LP840	190887468649	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,600	38W	4000K	82	120-277V	28
2BLT4 40L ADP EL14L LP835	190887470925	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	31W	3500K	82	120-277V	28
2BLT4 40L ADP EL14L LP840	190887470918	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	31W	4000K	82	120-277V	28
2BLT4 46L ADP EL14L LP835	190887468670	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,600	38W	3500K	82	120-277V	28
2BLT4 46L ADP EL14L LP840	190887468663	2' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,600	38W	4000K	82	120-277V	28
BLT4 40L ADP LP835	190887466218	1' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	32W	3500K	82	120-277V	39
BLT4 40L ADP LP840	190887465228	1' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	32W	4000K	82	120-277V	39
BLT4 40L ADP EL14L LP835	190887466621	1' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	32W	3500K	82	120-277V	39
BLT4 40L ADP EL14L LP840	190887466614	1' x 4' Center Basket LED Lay-in	2 Lamp 32W T8	4,000	32W	4000K	82	120-277V	39
2BLT2 33L ADP LP835	190887529708	2' x 2' Center Basket LED Lay-in	2 Lamp 17W T8	3,300	26W	3500K	82	120-277V	56
2BLT2 33L ADP LP840	190887529739	2' x 2' Center Basket LED Lay-in	2 Lamp 17W T8	3,300	26W	4000K	82	120-277V	56
2BLT2 33L ADP EL14L LP835	190887529990	2' x 2' Center Basket LED Lay-in	2 Lamp 17W T8	3,300	26W	3500K	82	120-277V	56
2BLT2 33L ADP EL14L LP840	190887529937	2' x 2' Center Basket LED Lay-in	2 Lamp 17W T8	3,300	26W	4000K	82	120-277V	56

Accessories

Catalog Number	UPC	Description
2X2SMKSHP PAF	193047794299	2'x2' Surface Mount Troffer Kit
2X4SMKSHP PAF	193047794312	2'x4' Surface Mount Troffer Kit
1X4SMKSHP PAF	193047794282	1'x4' Surface Mount Troffer Kit

Dimensions

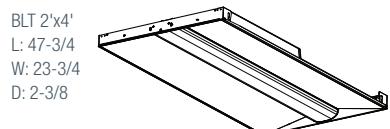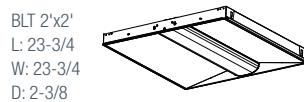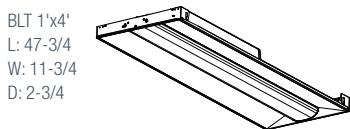

All dimensions are inches unless otherwise specified.

Certain airborne contaminants can diminish integrity of acrylic. See page 174 for Acrylic Compatibility table for suitable uses.

Features


- Ideal for lighting applications such as schools, offices and other commercial spaces, retail stores, hospitals and other healthcare facilities
- Designed to deliver the performance and aesthetic of the BLT without full fixture replacement
- Ideal for fast-paced renovation projects and in settings where plenum exposure must be avoided
- Compatible with nLight® controls for networked operations
- Designed to provide 80% lumen maintenance at 60,000 hours
- Standard 0-10V dimming driver that dims to 10%



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
BLT4R 40L ADP LP835	190887551013	1'x4' Center Basket LED Relight Kit	2 Lamp 32W T8	4,000	34W	3500K	82	120-277V	30
BLT4R 40L ADP LP840	190887551082	1'x4' Center Basket LED Relight Kit	2 Lamp 32W T8	4,100	34W	4000K	82	120-277V	30
2BLT2R 33L ADP LP835	190887550900	2'x2' Center Basket LED Relight Kit	2 Lamp 17W T8	3,200	30W	3500K	82	120-277V	52
2BLT2R 33L ADP LP840	190887550931	2'x2' Center Basket LED Relight Kit	2 Lamp 17W T8	3,313	30W	4000K	82	120-277V	52
2BLT4R 40L ADP LP835	190887550948	2'x4' Center Basket LED Relight Kit	2 Lamp 32W T8	3,945	34W	3500K	82	120-277V	26
2BLT4R 40L ADP LP840	190887550979	2'x4' Center Basket LED Relight Kit	2 Lamp 32W T8	4,032	34W	4000K	82	120-277V	26
2BLT4R 46L ADP LP835	190887550993	2'x4' Center Basket LED Relight Kit	3 Lamp 32W T8	4,520	38W	3500K	82	120-277V	26
2BLT4R 46L ADP LP840	190887551006	2'x4' Center Basket LED Relight Kit	3 Lamp 32W T8	4,619	38W	4000K	82	120-277V	26
2BLT4R 48L ADP LP835	191848302149	2'x4' Center Basket LED Relight Kit	3 Lamp 32W T8	4,910	38W	3500K	82	120-277V	26
2BLT4R 48L ADP LP840	191848302156	2'x4' Center Basket LED Relight Kit	3 Lamp 32W T8	4,988	38W	4000K	82	120-277V	26

Minimum Host Housing Dimensions Shown

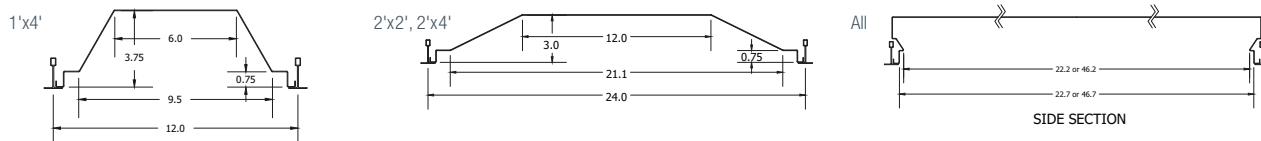

GTL



Features

- Affordable LED lay-in that delivers general ambient lighting for many applications such as schools, offices and hospitals
- Ideal for one-for-one replacement of existing fluorescent lensed lay-ins, providing energy savings without disrupting the look of the overall space
- Pattern #12 acrylic lens option matches previous fluorescent aesthetic
- Long-life LEDs coupled with high-efficiency drivers to provide a superior level of illumination
- Standard 0-10V dimming driver


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
GTL4 3700LM LP835	889804707076	1'x4' LED Lay-In	2 Lamp 32W T8	3,700	31W	3500K	82	120-277V	40
GTL4 3700LM LP840	889804707090	1'x4' LED Lay-In	2 Lamp 32W T8	3,700	31W	4000K	82	120-277V	40
2GTL2 3300LM LP835	889804702637	2'x2' LED Lay-In	2 U-Bent 32W T8	3,300	28W	3500K	82	120-277V	56
2GTL2 3300LM LP840	889804702460	2'x2' LED Lay-In	2 U-Bent 32W T8	3,300	28W	4000K	82	120-277V	56
2GTL2 3700LM LP835	889804704143	2'x2' LED Lay-In	2 U-Bent 32W T8	3,700	31W	3500K	82	120-277V	56
2GTL2 3700LM LP840	889804704242	2'x2' LED Lay-In	2 U-Bent 32W T8	3,700	31W	4000K	82	120-277V	56
2GTL4 4400LM LP835	889804706598	2'x4' LED Lay-In	2 Lamp 32W T8	4,400	34W	3500K	82	120-277V	28
2GTL4 4400LM LP840	889804706956	2'x4' LED Lay-In	2 Lamp 32W T8	4,400	34W	4000K	82	120-277V	28
2GTL4 A12 120 LP840	889804351620	2'x4' LED Lay-In	2 Lamp 32W T8	4,000	29W	4000K	82	120V	28
2GTL4 5000LM LP835	889804710366	2'x4' LED Lay-In	3 Lamp 32W T8	4,900	39W	3500K	82	120-277V	28
2GTL4 5000LM LP840	889804710458	2'x4' LED Lay-In	3 Lamp 32W T8	5,000	39W	4000K	82	120-277V	28


CS Denotes Contractor Select Product

Dimensions

GTL 2'x4' and 2'x2'



GTL 1'x4'





BLWP



Features


- Ideal for a variety of lighting applications including schools, stairwells, utility rooms, offices and other commercial spaces
- Low-profile LED wraparound with volumetric distribution
- Can mount directly to the ceiling, serve as a wall bracket or suspend with cables
- High-efficiency LEDs provide superior lighting quality
- Ideal for replacing 2-lamp fluorescent wraparounds
- Unique hinged door frame that allows for easy installation without removing the diffuser
- Designed to provide 80% lumen maintenance at 60,000 hours

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
BLWP4 30L ADP LP835	191848282021	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	3,000	25W	3500K	82	120-277V	70
BLWP4 30L ADP LP840	191848281994	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	3,000	25W	4000K	82	120-277V	70
BLWP4 40L ADP LP835	191848080863	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,000	35W	3500K	82	120-277V	70
BLWP4 40L ADP LP840	191848080870	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,000	35W	4000K	82	120-277V	70
BLWP4 48L ADP LP835	191848080900	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,800	39W	3500K	82	120-277V	70
BLWP4 48L ADP LP840	191848080917	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,800	39W	4000K	82	120-277V	70

Dimensions

BLWP



Length: 48" (4')

Features

- Ideal for closets, storage rooms, hallways and office spaces
- Designed to replace existing 2-lamp T8 and T12 fluorescent wraparounds
- LED system that delivers long life and excellent color for a quality, low-maintenance lighting installation
- Decorative appearance with a curved diffuser
- Designed to provide 90% lumen maintenance at 50,000 hours




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
LBL2 LP835	190887819380	2' LED Wraparound, Curved Profile	2 Lamp 17W T8	2,000	17W	3500K	82	120-277V	112
LBL2 LP840	190887819397	2' LED Wraparound, Curved Profile	2 Lamp 17W T8	2,000	17W	4000K	82	120-277V	112
LBL4 LP835	190887819199	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,200	32W	3500K	82	120-277V	56 
LBL4 LP840	190887819359	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,200	32W	4000K	82	120-277V	56 

 Denotes Contractor Select Product

Dimensions

LBL

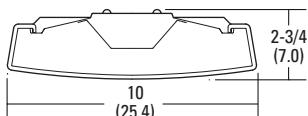

Length: 24" (2') or 48" (4')

SBL



Features

- Ideal for closets, storage rooms, hallways and office spaces
- Designed to replace existing 2-lamp T8 and T12 fluorescent wraparounds
- Flat-bottom diffuser
- Designed to provide 90% lumen maintenance at 50,000 hours


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
SBL2 LP835	190887819458	2' LED Wraparound, Square Profile	2 Lamp 17W T8	1,900	17W	3500K	82	120-277V	140
SBL2 LP840	190887819489	2' LED Wraparound, Square Profile	2 Lamp 17W T8	1,900	17W	4000K	82	120-277V	140
SBL4 LP835	190887819410	4' LED Wraparound, Square Profile	2 Lamp 32W T8	3,900	32W	3500K	82	120-277V	70
SBL4 LP840	190887819434	4' LED Wraparound, Square Profile	2 Lamp 32W T8	3,900	32W	4000K	82	120-277V	70

Denotes Contractor Select Product

Dimensions

SBL

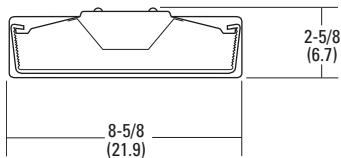

Length: 24" (2') or 48" (4')

Features

- Ideal for use in kitchens, offices, utility work areas, stairways and many other applications
- This LED narrow wrap is a low-profile, linear fixture with decorative end caps and white, acrylic diffuser for widespread, uniform illumination
- Provides general illumination for surface-mount residential and light commercial applications
- Designed to provide 70% lumen maintenance for at least 50,000 hours



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity	CS
FMLWL 24 840	888791197921	2' LED Wrap, Ceiling and Wall	2 Lamp 17W T8 Fluorescent	1,400	20W	4000K	85	120V	224	CS
FMLWL 24 840 ZT MVOLT	191848384657	2' LED Wrap, Ceiling and Wall	17W T8 Fluorescent	3,000	32W	4000K	85	120-277V	224	
FMLWL 48 835	888791982343	4' LED Wrap, Ceiling and Wall	32W T8 Fluorescent	2,900	40W	3500K	85	120V	112	
FMLWL 48 840	888791197969	4' LED Wrap, Ceiling and Wall	2 Lamp 32W T8 Fluorescent	2,900	40W	4000K	85	120V	112	CS
FMLWL 48 835 ZT MVOLT	191848384565	4' LED Wrap, Ceiling and Wall	32W T8 Fluorescent	4,600	48W	3500K	85	120-277V	112	
FMLWL 48 840 ZT MVOLT	191848384558	4' LED Wrap, Ceiling and Wall	32W T8 Fluorescent	4,600	48W	4000K	85	120-277V	112	CS


CS Denotes Contractor Select Product

Accessories

Catalog Number	UPC	Description
DFMLWL 24	888791448627	2' White Acrylic Diffuser
DFMLWL 48	888791448634	4' White Acrylic Diffuser

Dimensions

2'	4'
Width: 5-1/2" (14.0)	Width: 5-1/2" (14.0)
Length: 24-1/2" (62.2)	Length: 47-2/5" (120.4)
Depth: 2-3/5" (6.6)	Depth: 2-3/5" (6.6)



FML4W



Features

- Ideal for use in closets, foyers, hallways, laundry rooms, corridors, offices, and utility work areas
- This wide housing LED wrap is perfect for renovation, it easily covers up existing blemishes from older fixtures, while providing even illumination
- A durable polycarbonate lens provides general illumination for surface-mount light commercial and residential applications
- Adjustable Light Output (ALO6) – 4,000 or 5,000 or 6,000 lumens
- Standard 0-10V dimming or triac dimming options
- Designed to provide 85% lumen maintenance at 60,000 hours


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
FML4W 48 5000LM 835 ZT MVOLT	194994026723	4' LED Wrap	2 or 3 Lamp Fluorescent T8 or T12	5,000	53.4W	3500K	80	120-277V	44
FML4W 48 5000LM 840 ZT MVOLT	194994026815	4' LED Wrap	2 or 3 Lamp Fluorescent T8 or T12	5,000	53.4W	4000K	80	120-277V	44
FML4W 48 AL06 SEF 835 MVOLT	194994027058	4' LED Wrap	2, 3 or 4 Lamp Fluorescent T8 or T12	4,000, 5,000, 6,000	49W	3500K	80	120-277V	44
FML4W 48 AL06 SEF 840 MVOLT	194994027249	4' LED Wrap	2, 3 or 4 Lamp Fluorescent T8 or T12	4,000, 5,000, 6,000	49W	4000K	80	120-277V	44
FML4W 48 5000LM 840 TD	194994011507	4' LED Wrap	2 or 3 Lamp Fluorescent T8 or T12	5,000	54W	4000K	80	120V	44

Denotes Contractor Select Product

Dimensions

Width: 10" (25.4)
Length: 47-7/8" (121.6)
Depth: 3" (7.62)

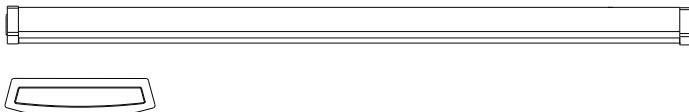

Features

- Ideal for task or accent lighting in residential and light commercial applications
- Designed to provide 70% lumen maintenance for at least 50,000 hours
- White lens provides even illumination on surfaces where tasks are performed
- Includes mounting chains and S-hooks
- DPSL includes 5A Max convenience outlet to link up to 10 fixtures




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Energy Star	Pallet Quantity
SHLP 36IN 40K 80CRI DNA M12	190887632729	36" LED Shoplight	2 - T8 Fluorescent	3,000	34W	4000K	80	120V	Yes	144
SHLP 48IN 40K 80CRI DNA M12	190887632743	48" LED Shoplight	2 - T8 Fluorescent	3,200	36W	4000K	80	120V	Yes	96

CS Denotes Contractor Select Product

Dimensions

Length: 33-5/8" (62.1) or
45-1/2" (63.9)
Width: 2-1/3" (6.0)
Height: 2" (5.0)

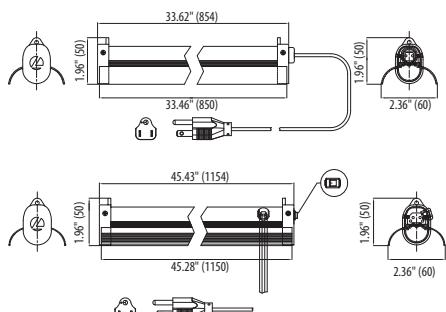


Downlighting





32	4", 6", 7" & 8" Commercial LED Downlighting & Trim Kits
36	3", 4' & 6" LED Ultra-Thin Wafer Downlights
42	3", 4" & 6" Lithonia OneUp™ LED Downlights
45	6" LED Housings
46	6" LED Speaker Downlight
49	5/6" LED Modules
50	6" LED Gimbals
51	4" LED Housings
53	4" LED Modules
54	6" Incandescent Housings & Trims
56	6" Incandescent Premium Housings & Trims
58	6" Incandescent Shallow Housings & Trims
60	6" Incandescent Premium Shallow Housings & Trims
62	5" Incandescent Housings & Trims
64	4" Incandescent Housings & Trims

LDN4 | LDN6

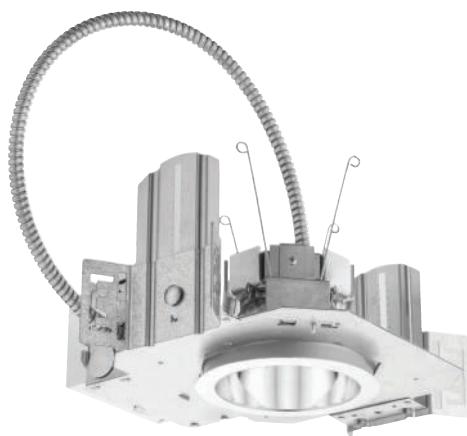

Features

- New construction downlight for applications such as corridors, lobbies, conference rooms and private offices
- 16-gauge galvanized steel mounting/plaster frame
- Vertically adjustable mounting brackets providing 3-3/4" total adjustment
- Maximum 1-1/2" ceiling thickness
- Designed to provide at least 70% light output at 50,000 hours
- Aluminum reflectors that are optically designed to maximize lumen output and provide superior glare control
- Includes dimming driver with 10% minimum dimming level





Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Pallet Quantity
LDN4 35/10 MVOLT GZ10 HSG	193048378481	4" LED New Construction Downlighting	26TRT	1,000	10.6W	3500K	120-277V	96
LDN4 35/15 MVOLT GZ10 HSG	193048372816	4" LED New Construction Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96
LDN4 35/20 MVOLT GZ10 HSG	193048377873	4" LED New Construction Downlighting	42TRT	2,000	22.1W	3500K	120-277V	96
LDN6 35/10 MVOLT GZ10 HSG	193048377323	6" LED New Construction Downlighting	26TRT	1,000	10.4W	3500K	120-277V	96
LDN6 35/15 MVOLT GZ10 HSG	193048375787	6" LED New Construction Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96
LDN6 35/20 MVOLT GZ10 HSG	193048380026	6" LED New Construction Downlighting	42TRT	2,000	22.5W	3500K	120-277V	96

Trim Kits

Catalog Number	UPC	Description
LO4AR LSS TRIM	745972691343	LDN4 Open Semi-Specular, Clear
LW4AR LSS TRIM	190887165678	LDN4 Open Wallwash Semi-Specular, Clear
LO6AR LSS TRIM	745972691619	LDN6 Open Wallwash Semi-Specular, Clear
LW6AR LSS TRIM	190887157093	LDN6 Open Wallwash Semi-Specular, Clear

Dimensions

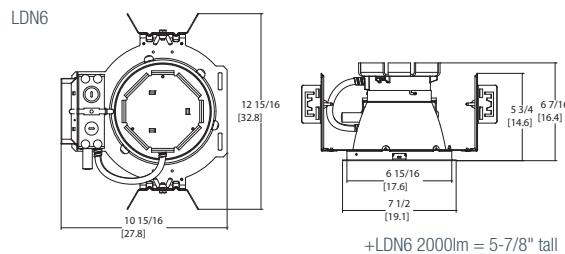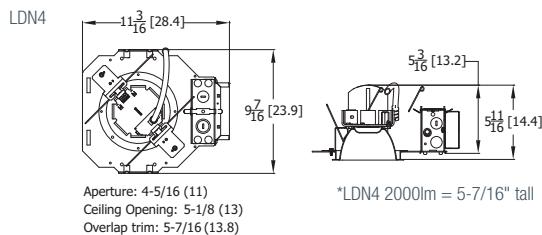

Features

- Designed for retrofitting 6" downlights
- Typical installation time of 3-4 minutes
- Delivered lumens from 1,000 – 2,000
- 55° cutoff and a typical 85 LPW, for highly efficacious and glare-free lighting
- 1.0 spacing/mounting-height ratio, providing general illumination performance
- Open wallwash kicker design providing a complementary asymmetric wash-light distribution
- Includes dimming driver with 1% minimum dimming level



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Pallet Quantity
LDN6RV 35/10 MVOLT GZ1 HSG	193048450712	6" LED Retrofit Downlighting	26TRT	1,000	10.6W	3500K	120-277V	96
LDN6RV 35/15 MVOLT GZ1 HSG	193048407471	6" LED Retrofit Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96
LDN6RV 35/20 MVOLT GZ1 HSG	193048599978	6" LED Retrofit Downlighting	42TRT	2,000	22.5W	3500K	120-277V	96

Trim Kits

Catalog Number	UPC	Description
LR6AR LSS TRIM	191723387353	LDN6 Retrofit Open Semi-Specular, Clear
LRW6AR LSS TRIM	191723605075	LDN6 Retrofit Open Wallwash Semi-Specular, Clear

Dimensions

LDN6RV

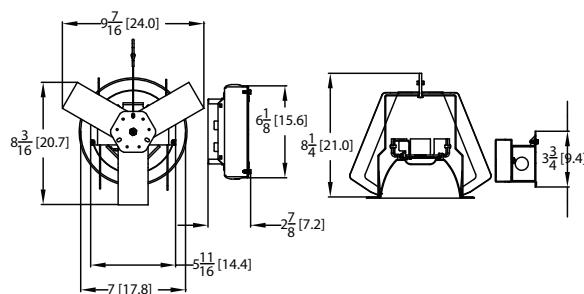

LDN7RV



Features

- Designed for retrofitting 7" downlights
- Typical installation time of 3–4 minutes
- Delivered lumens from 1,000 – 2,000
- 55° cutoff and a typical 85 LPW, for highly efficacious and glare-free lighting
- 1.0 spacing/mounting-height ratio, providing general illumination performance
- Open wallwash kicker design providing a complementary asymmetric wash-light distribution
- Includes dimming driver with 1% minimum dimming level



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Pallet Quantity
LDN7RV 35/10 MVOLT GZ1 HSG	193048715385	7" LED Retrofit Downlighting	26TRT	1,000	10.6W	3500K	120-277V	96
LDN7RV 35/15 MVOLT GZ1 HSG	193048426298	7" LED Retrofit Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96
LDN7RV 35/20 MVOLT GZ1 HSG	193048424935	7" LED Retrofit Downlighting	42TRT	2,000	22.5W	3500K	120-277V	96

Trim Kits

Catalog Number	UPC	Description
LR7AR LSS TRIM	191723386486	LDN7 Retrofit Open Semi-Specular, Clear
LRW7AR LSS TRIM	191848303375	LDN7 Retrofit Open Wallwash Semi-Specular, Clear

Dimensions

LDN7RV

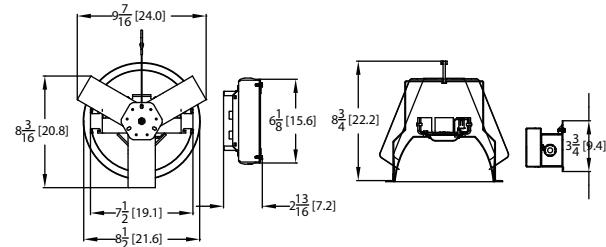

Features

- Designed for retrofitting 8" downlights
- Typical installation time of 3–4 minutes
- Delivered lumens from 1,000 – 2,000
- 55° cutoff and a typical 85 LPW, for highly efficacious and glare-free lighting
- 1.0 spacing/mounting-height ratio, providing general illumination performance
- Open wallwash kicker design providing a complementary asymmetric wash-light distribution
- Includes dimming driver with 1% minimum dimming level



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Pallet Quantity
LDN8RV 35/10 MVOLT GZ1 HSG	193048378900	8" LED Retrofit Downlighting	26TRT	1,000	10.6W	3500K	120-277V	96
LDN8RV 35/15 MVOLT GZ1 HSG	193048536720	8" LED Retrofit Downlighting	32TRT	1,500	17.5W	3500K	120-277V	96
LDN8RV 35/20 MVOLT GZ1 HSG	193048375701	8" LED Retrofit Downlighting	42TRT	2,000	22.5W	3500K	120-277V	96

Trim Kits

Catalog Number	UPC	Description
LR8AR LSS TRIM	191723056204	LDN8 Retrofit Open Semi-Specular, Clear
LRW8AR LSS TRIM	191723446999	LDN8 Retrofit Open Wallwash Semi-Specular, Clear

Dimensions

LDN8RV

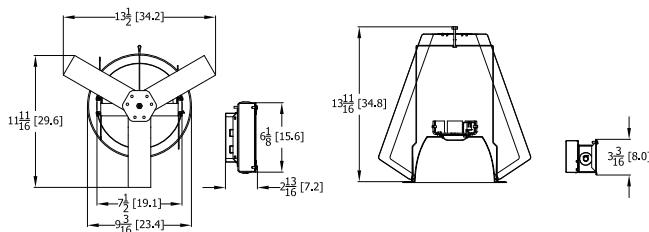

WF3 | WF4E | WF6E



Features

- No housing needed - ideal for shallow plenums
- IC rated – safe to install in direct contact with insulation
- Edge-lit LED technology for even illumination
- Dimmable to 10%
- Wet location listed
- See additional finishes on specification sheet

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF3 LED 27K MW M6	191723480900	3" Wafer-Thin LED Downlight	50W Incandescent	540	8W	2700K	80	120V	White	600
WF3 LED 30K MW M6	889804672763	3" Wafer-Thin LED Downlight	50W Incandescent	550	8W	3000K	80	120V	White	600
WF3 LED 40K MW M6	889804672794	3" Wafer-Thin LED Downlight	50W Incandescent	590	7.9W	4000K	80	120V	White	600
WF4E LED 30K 90CRI MW CP6 M2	193048380439	4" Wafer-Thin LED Downlight	65W Incandescent	579	8.14W	3000K	90	120V	White	120 CS
WF6E LED 30K 90CRI MW CP6 M2	193048380569	6" Wafer-Thin LED Downlight	65W Incandescent	790	11.2W	3000K	90	120V	White	80 CS


CS Denotes Contractor Select Product

Accessories


Catalog Number	UPC	Description
WF8643 Pan U	191848296028	Universal New Construction Pan, Unit
WF3 PAN R12	190887488463	3" New Construction Pan, Retail Pack of 12
WF4 PAN R12	190887488494	4" New Construction Pan, Retail Pack of 12
WF6 PAN R12	190887488913	6" New Construction Pan, Retail Pack of 12

Dimensions


WF3

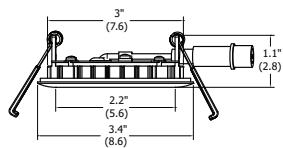

WF4E

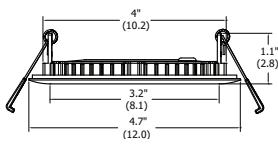

WF6E

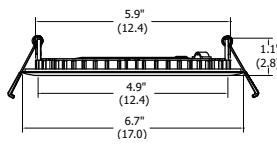

Features


- No housing needed - ideal for shallow plenums
- IC rated – safe to install in direct contact with insulation
- Dimmable to 10%
- Wet location listed
- 20° adjustable tilt in both directions and 180° rotation



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF3 ADJ LED 27K 90CRI MW M6	193047539746	3" Wafer-Thin LED Gimbal	50W Incandescent	520	8W	2700K	90	120V	White	720
WF3 ADJ LED 30K 90CRI MW M6	193047539814	3" Wafer-Thin LED Gimbal	50W Incandescent	530	8W	3000K	90	120V	White	720
WF3 ADJ LED 40K 90CRI MW M6	193047539852	3" Wafer-Thin LED Gimbal	50W Incandescent	545	8W	4000K	90	120V	White	720

Dimensions

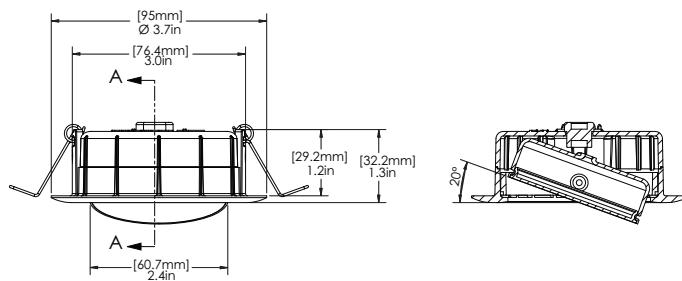

Switchable White 120V WF4 | WF6 | WF8



Features

- Use switch to adjust color temperature during installation (2700K, 3000K, 3500K or 3000K, 4000K or 5000K)
- No housing needed – ideal for shallow plenums
- IC-rated – safe to install in direct contact with insulation
- Edge-lit LED technology for even illumination
- Dimmable to 10%
- Wet location listed
- See additional finishes on spec sheet


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4 LED 27K30K35K 90CRI MW M6	191848253403	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	730-800	10.5W	2700K/3000K/3500K	90	120V	White	576
WF4 LED 30K40K50K 90CRI MW M6	191848253557	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	750-810	10.5W	3000K/4000K/5000K	90	120V	White	576
WF6 LL LED 27K30K35K 90CRI MW M6	191848254301	6" Wafer-Thin Lower Lumen LED Downlight with Switchable White	75W Incandescent	830-900	10W	2700K/3000K/3500K	90	120V	White	450
WF6 LL LED 30K40K50K 90CRI MW M6	191848254400	6" Wafer-Thin Lower Lumen LED Downlight with Switchable White	75W Incandescent	850-920	10W	3000K/4000K/5000K	90	120V	White	450
WF6 LED 27K30K35K 90CRI MW M6	191848253861	6" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,040-1,150	14W	2700K/3000K/3500K	90	120V	White	450
WF6 LED 30K40K50K 90CRI MW M6	191848253946	6" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,090-1,190	14W	3000K/4000K/5000K	90	120V	White	450
WF8 LED 27K30K35K 90CRI MW M6	191848254486	8" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,630-1,800	20W	2700K/3000K/3500K	90	120V	White	144
WF8 LED 30K40K50K 90CRI MW M6	191848254653	8" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,690-1,850	20W	3000K/4000K/5000K	90	120V	White	144
WF8 SQ B LED 27K30K35K 90CRI MW M6	191848267981	8" Wafer-Thin Square Baffle LED Downlight with Switchable White	100W Incandescent	1,580-1,720	20W	2700K/3000K/3500K	90	120V	White	144
WF8 SQ B LED 30K40K50K 90CRI MW M6	191848268063	8" Wafer-Thin Square Baffle LED Downlight with Switchable White	100W Incandescent	1,590-1,780	20W	3000K/4000K/5000K	90	120V	White	144
WF8 SQ S LED 27K30K35K 90CRI MW M6	191848267813	8" Wafer-Thin Square Smooth LED Downlight with Switchable White	100W Incandescent	1,580-1,720	20W	2700K/3000K/3500K	90	120V	White	144
WF8 SQ S LED 30K40K50K 90CRI MW M6	191848267936	8" Wafer-Thin Square Smooth LED Downlight with Switchable White	100W Incandescent	1,590-1,780	20W	3000K/4000K/5000K	90	120V	White	144


CS Denotes Contractor Select Product

Dimensions


WF4

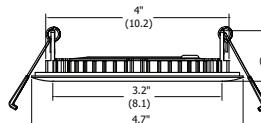


WF6

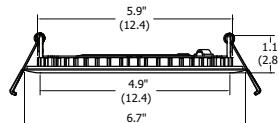

WF8

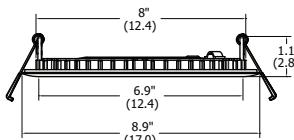

WF8 SQ

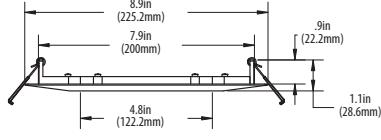

Switchable White 120V WF4 ADJ | WF6 ADJ

Features

- Use switch to adjust color temperature during installation (2700K, 3000K, 3500K or 3000K, 4000K, 5000K)
- No housing needed - ideal for shallow plenums
- IC Rated - safe to install in direct contact with insulation
- Dimmable to 10%
- Wet location listed
- 20° adjustable tilt in both directions and 180° rotation




Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4 ADJ LED 27K30K35K 90CRI MW M6	193047544832	4" Wafer-Thin LED Gimbal	50W Incandescent	686-707	8W	2700K/3000K/3500K	90	120V	White	576
WF4 ADJ LED 30K40K50K 90CRI MW M6	193047544955	4" Wafer-Thin LED Gimbal	50W Incandescent	707-780	8W	3000K/4000K/5000K	90	120V	White	576
WF6 ADJ LED 27K30K35K 90CRI MW M6	193047545310	6" Wafer-Thin LED Gimbal	75W Incandescent	967-1,008	12W	2700K/3000K/3500K	90	120V	White	360
WF6 ADJ LED 30K40K50K 90CRI MW M6	193047545594	6" Wafer-Thin LED Gimbal	75W Incandescent	967-1,123	12W	3000K/4000K/5000K	90	120V	White	360

Dimensions

WF4 ADJ

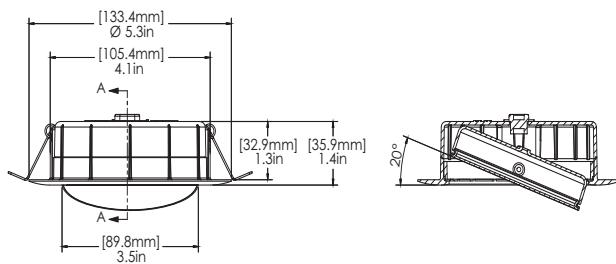

WF6 ADJ

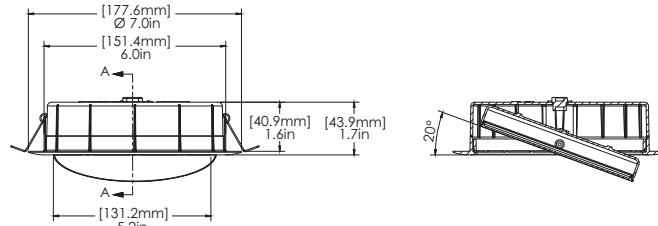

Switchable White MVOLT WF4 | WF6 | WF8



Features

- Use switch to adjust color temperature during installation (2700K, 3000K, 3500K or 3000K, 4000K or 5000K)
- No housing needed – ideal for shallow plenums
- IC-rated – safe to install in direct contact with insulation
- Edge-lit LED technology for even illumination
- Dimmable to 10%
- Wet location listed




Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4 LED 27K30K35K MVOLT 90CRI MW	193047884679	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	730-800	10.5W	2700K/3000K/4000K	90	120-277V	White	324
WF6 LED 30K40K50K MVOLT 90CRI MW	193047884693	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	750-810	10.5W	3000K/4000K/5000K	90	120-277V	White	576
WF6 LED 27K30K35K MVOLT 90CRI MW	193047884709	6" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,070-1,150	14W	2700K/3000K/4000K	90	120-277V	White	180
WF6 LED 30K40K50K MVOLT 90CRI MW	193047884716	6" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,090-1,190	14W	3000K/4000K/5000K	90	120-277V	White	450
WF8 LED 27K30K35K MVOLT 90CRI MW	193047884730	8" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,630-1,800	20W	2700K/3000K/4000K	90	120-277V	White	144
WF8 LED 30K40K50K MVOLT 90CRI MW	193047884778	8" Wafer-Thin LED Downlight with Switchable White	100W Incandescent	1,690-1,850	20W	3000K/4000K/5000K	90	120-277V	White	300

Dimensions


WF4

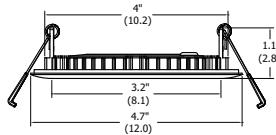

WF6

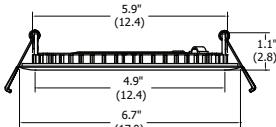

WF8

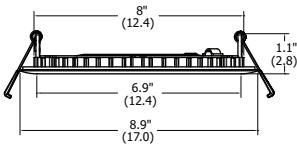



3JBK RD | 4JBK RD | 6JBK RD



Features


- An innovative "canless" design for fast and simple installation without the need for tools
- IC-rated - safe to install in direct contact with insulation
- Wet location listed
- Dimmable to 10%
- See additional finishes on specification sheet

Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
3JBK RD 27K 90CRI MW M6	191848367797	Lithonia OneUp™ 3" LED Downlight	50W Incandescent	500	7W	2700K	90	120V	White	504
3JBK RD 30K 90CRI MW M6	191723523126	Lithonia OneUp™ 3" LED Downlight	50W Incandescent	500	7W	3000K	90	120V	White	504
3JBK RD 40K 90CRI MW M6	191848367803	Lithonia OneUp™ 3" LED Downlight	50W Incandescent	500	7W	4000K	90	120V	White	504
4JBK RD 27K 90CRI MW M6	191848367650	Lithonia OneUp™ 4" LED Downlight	75W Incandescent	695	9W	2700K	90	120V	White	324
4JBK RD 30K 90CRI MW M6	191723138627	Lithonia OneUp™ 4" LED Downlight	75W Incandescent	695	9W	3000K	90	120V	White	324
4JBK RD 40K 90CRI MW M6	191848367759	Lithonia OneUp™ 4" LED Downlight	75W Incandescent	695	9W	4000K	90	120V	White	324
6JBK RD 27K 90CRI MW M6	191848367841	Lithonia OneUp™ 6" LED Downlight	100W Incandescent	850	11W	2700K	90	120V	White	180
6JBK RD 30K 90CRI MW M6	191723138498	Lithonia OneUp™ 6" LED Downlight	100W Incandescent	850	11W	3000K	90	120V	White	180
6JBK RD 40K 90CRI MW M6	191848367933	Lithonia OneUp™ 6" LED Downlight	100W Incandescent	850	11W	4000K	90	120V	White	180

Dimensions


3JBK RD

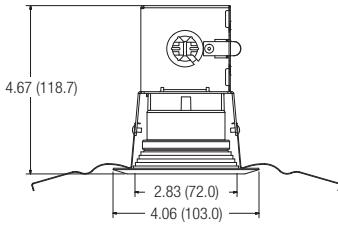

4JBK RD

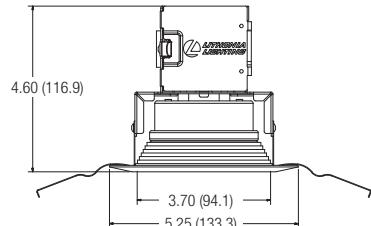

6JBK RD

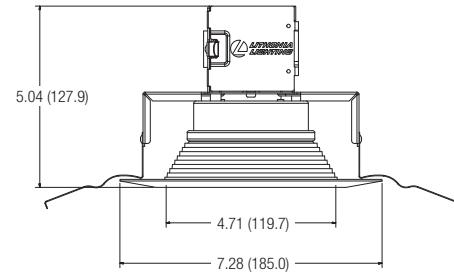

Features

- An innovative "canless" design for fast and simple installation without the need for tools
- IC-rated - safe to install in direct contact with insulation
- Damp location listed
- Dimmable to 10%
- See additional finishes on specification sheet




Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
4JBK ADJ 27K 90CRI MW M6	191848367896	Lithonia OneUp™ 4" LED Adjustable	50W Incandescent	620	8W	2700K	90	120V	White	324
4JBK ADJ 30K 90CRI MW M6	191723138641	Lithonia OneUp™ 4" LED Adjustable	50W Incandescent	620	8W	3000K	90	120V	White	324
4JBK ADJ 40K 90CRI MW M6	191848370667	Lithonia OneUp™ 4" LED Adjustable	50W Incandescent	620	8W	4000K	90	120V	White	324
6JBK ADJ 27K 90CRI MW M6	191848367674	Lithonia OneUp™ 6" LED Adjustable	75W Incandescent	830	11W	2700K	90	120V	White	180
6JBK ADJ 30K 90CRI MW M6	191723138528	Lithonia OneUp™ 6" LED Adjustable	75W Incandescent	830	11W	3000K	90	120V	White	180
6JBK ADJ 40K 90CRI MW M6	191848367681	Lithonia OneUp™ 6" LED Adjustable	75W Incandescent	830	11W	4000K	90	120V	White	180

Dimensions

4JBK ADJ

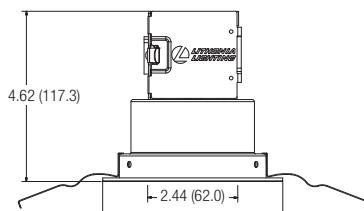

6JBK ADJ

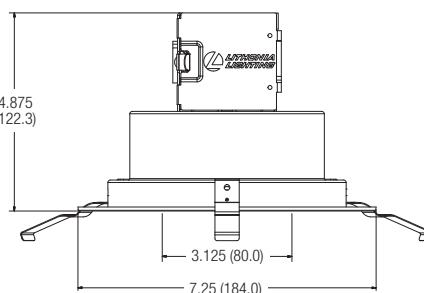



Features

- Recessed housings rated IC/Non-IC for new construction or remodel applications
- New construction housings include factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housing with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Quick disconnect provided for power connection to the LED modules
- Suitable for ceilings up to 1½" thick




Ordering Information


Catalog Number	UPC	Description	Lamp Source	Voltage	Finish	Lamp Included	Pallet Quantity
L7XLED T24 R6	820476280566	6" Air-Tight, IC/Non-IC New Construction Housing, LED Base	LED	120V	Gray	No	120
L7XRLED T24 R6	820476467738	6" Air-Tight, IC/Non-IC Remodel Housing, LED Base	LED	120V	Gray	No	144

Dimensions

L7XLED

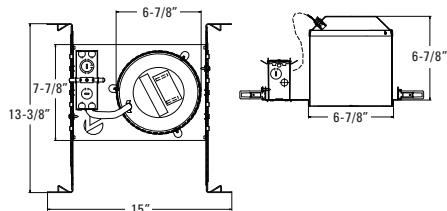

L7XRLED

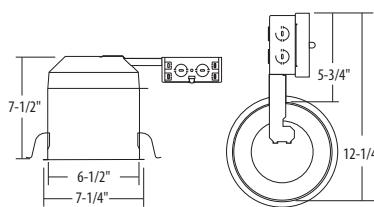

6SL LED Speaker Downlight



Features

- Fits in standard 6" apertures and recessed cans
- Speaker wirelessly connects to most Bluetooth-enabled devices
- Wirelessly pair up to 8 speaker downlights
- Wet location listed
- TRIAC dimmable to 10%




Bluetooth®

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
6SL RD 07LM 27K 90CRI MW	191723344059	6" LED Speaker Downlight	65W Incandescent	650	15W	2700K	90	120V	White	144
6SL RD 07LM 30K 90CRI MW	191723516357	6" LED Speaker Downlight	65W Incandescent	720	15W	3000K	90	120V	White	144
6SL RD 07LM 40K 90CRI MW	191723344066	6" LED Speaker Downlight	65W Incandescent	730	15W	4000K	90	120V	White	144

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Acuity Brands Lighting is under license.

Dimensions

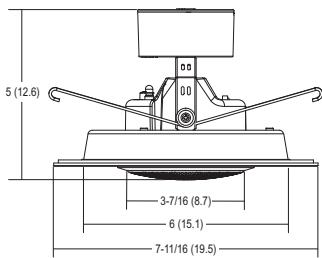

LED Companion Downlight for 6SL

Features


- Fits in standard 6" apertures and recessed cans
- Comes with both smooth and matching grill-style interchangeable faceplates
- Complementary companion to 6SL Speaker Downlight for a homogenized look
- Wet location listed
- TRIAC dimmable to 10%



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
6SL RD 07LM 27K 90CRI MW L/SPKR M6	193047540643	6" LED Companion Downlight	65W Incandescent	650	11W	2700K	90	120V	White	144
6SL RD 07LM 30K 90CRI MW L/SPKR M6	193047541084	6" LED Companion Downlight	65W Incandescent	720	12W	3000K	90	120V	White	144
6SL RD 07LM 40K 90CRI MW L/SPKR M6	193047541114	6" LED Companion Downlight	65W Incandescent	730	13W	4000K	90	120V	White	144

Dimensions

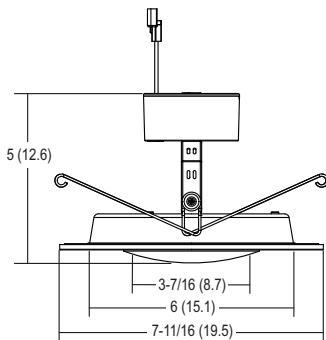



Features

- E Series LED module, ideal for retrofitting into existing downlight cans for new construction and remodel applications
- The LED module maintains at least 70% light output for 50,000 hours
- Line voltage dimmable to 10%
- More flexibility with 5" and 6" housing compatibility in one module
- Instant-on and Center2Edge™ dimming like traditional sources
- Available in baffle or smooth trim options
- Wet location listed for indoor and outdoor installations
- 1200lm versions available can be used to comply with Title 20




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity	CS
65BEMW LED 27K 90CRI M6	190887266672	5"/6" E Series LED Module, Baffle	65W Incandescent	750	12.1W	2700K	90	120V	White	360	CS
65BEMW LED 30K 90CRI M6	190887266634	5"/6" E Series LED Module, Baffle	65W Incandescent	835	11.9W	3000K	90	120V	White	360	CS
65BEMW LED 35K 90CRI M6	191723775471	5"/6" E Series LED Module, Baffle	65W Incandescent	825	11.7W	3500K	90	120V	White	360	
65BEMW LED 40K 90CRI M6	190887266696	5"/6" E Series LED Module, Baffle	65W Incandescent	845	11.9W	4000K	90	120V	White	360	CS
65BEMW LED 50K 90CRI M6	191723610277	5"/6" E Series LED Module, Baffle	65W Incandescent	825	12.1W	5000K	90	120V	White	360	
65SEMW LED 27K 90CRI M6	191848772195	5"/6" E Series LED Module, Smooth	65W Incandescent	750	12.1W	2700K	90	120V	White	360	
65SEMW LED 30K 90CRI M6	191848772270	5"/6" E Series LED Module, Smooth	65W Incandescent	835	11.9W	3000K	90	120V	White	360	CS
65SEMW LED 35K 90CRI M6	191848764855	5"/6" E Series LED Module, Smooth	65W Incandescent	825	11.7W	3500K	90	120V	White	360	
65SEMW LED 40K 90CRI M6	191848772287	5"/6" E Series LED Module, Smooth	65W Incandescent	845	11.9W	4000K	90	120V	White	360	
65SEMW LED 50K 90CRI M6	191848772522	5"/6" E Series LED Module, Smooth	65W Incandescent	825	12.1W	5000K	90	120V	White	360	
65BEMW HL LED 27K 90CRI M6	193047859424	5"/6" E Series LED Module, Baffle	75W Incandescent	1,200	13.8W	2700K	90	120V	White	360	
65BEMW HL LED 30K 90CRI M6	193047859394	5"/6" E Series LED Module, Baffle	75W Incandescent	1,200	13.8W	3000K	90	120V	White	360	
65BEMW HL LED 40K 90CRI M6	193047859417	5"/6" E Series LED Module, Baffle	75W Incandescent	1,200	13.8W	4000K	90	120V	White	360	


CS Denotes Contractor Select Product

Dimensions

65BE / 65SE



65BE HL

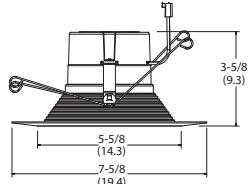

6G1




Features

- Ideal for retrofitting into existing downlight cans for new construction and remodel applications
- The adjustable LED Gimbal downlighting module is 80% more efficient than incandescent luminaires
- Line voltage dimmable to 10%
- 35° adjustable tilt in both directions and 180° rotation
- Directional lighting for accent and sloped-ceiling applications

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
6G1MW LED 27K 90CRI M6	889804157048	6" LED Gimbal, Adjustable	65W Incandescent	680	11W	2700K	90	120V	White	192
6G1MW LED 30K 90CRI M6	889804156614	6" LED Gimbal, Adjustable	65W Incandescent	790	10W	3000K	90	120V	White	192
6G1MW LED 40K 90CRI M6	889804157291	6" LED Gimbal, Adjustable	65W Incandescent	820	11W	4000K	90	120V	White	192

Dimensions

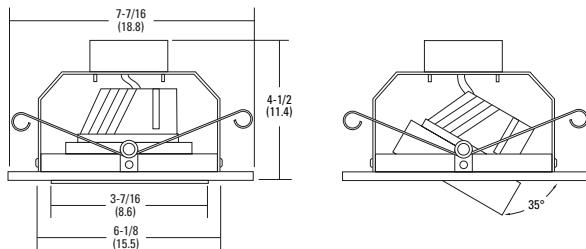

Features

- Recessed housings rated IC/Non-IC for new construction or remodel applications
- New construction housings with factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housings with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Quick disconnect provided for power connection to the LED modules
- Suitable for ceilings up to 1½" thick




Ordering Information


Catalog Number	UPC	Description	Lamp Source	Voltage	Finish	Lamp Included	Pallet Quantity
L3LED T24 R6	820476364419	4" Air-Tight, IC/Non-IC New Construction Housing, LED Base	LED	120V	Gray	No	144
L3RLED T24 R6	820476467967	4" Air-Tight, IC/Non-IC / Remodel Housing, LED Base	LED	120V	Gray	No	312

Dimensions

L3LED



L3RLED

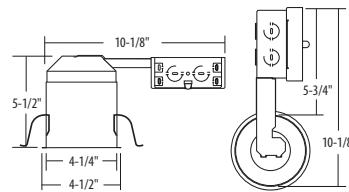



Features

- Ideal for retrofitting into existing downlight cans for new construction and remodel applications
- The LED module maintains at least 70% light output for 35,000 hours
- Line voltage dimmable to 10%
- Instant-on and Center2Edge™ dimming like traditional sources
- Available in baffle or smooth trim options
- Wet location listed for indoor and outdoor installations




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
4BEMW LED 27K 90CRI M6	190887266719	4" E Series LED Module, Baffle	65W Incandescent	650	9.8W	2700K	90	120V	White	576
4BEMW LED 30K 90CRI M6	190887266702	4" E Series LED Module, Baffle	65W Incandescent	700	9.8W	3000K	90	120V	White	576
4BEMW LED 35K 90CRI M6	191723775457	4" E Series LED Module, Baffle	65W Incandescent	700	10W	3500K	90	120V	White	576
4BEMW LED 40K 90CRI M6	190887266733	4" E Series LED Module, Baffle	65W Incandescent	720	9.8W	4000K	90	120V	White	576
4BEMW LED 50K 90CRI M6	191723610307	4" E Series LED Module, Baffle	65W Incandescent	700	9.8W	5000K	90	120V	White	576
4SEMW LED 27K 90CRI M6	191848772591	4" E Series LED Module, Smooth	65W Incandescent	650	9.8W	2700K	90	120V	White	576
4SEMW LED 30K 90CRI M6	191848772614	4" E Series LED Module, Smooth	65W Incandescent	700	9.8W	3000K	90	120V	White	576
4SEMW LED 35K 90CRI M6	191848772737	4" E Series LED Module, Smooth	65W Incandescent	700	10W	3500K	90	120V	White	576
4SEMW LED 40K 90CRI M6	191848772669	4" E Series LED Module, Smooth	65W Incandescent	720	9.8W	4000K	90	120V	White	576
4SEMW LED 50K 90CRI M6	191848772676	4" E Series LED Module, Smooth	65W Incandescent	700	9.8W	5000K	90	120V	White	576

Denotes Contractor Select Product

Dimensions



L7X | L7XR



Features

- Recessed housings rated IC/Non-IC for new construction or remodel applications
- New construction housing with factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housings with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Suitable for ceilings up to 1½" thick


Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Socket	Pallet Quantity	
L7X R6	784231091906	6" New Construction Housing	Incandescent	120V	E26 Screw Shell	120	
L7XR R6	745973789704	6" Remodel Housing	Incandescent	120V	E26 Screw Shell	144	


Denotes Contractor Select Product

Dimensions

L7X

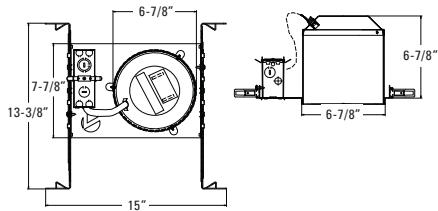

L7XR

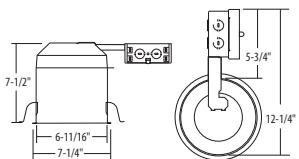

Features

- These trims are compatible with L7X and L7XR housings
- Baffle, eyeball and open trims are damp location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing
- Trim retention (TOR) — two side-mounted torsion springs on the trim and two receiving brackets in the can to ensure a consistently tight fit with the ceiling



Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
702 TOR R24	745975280780	6" Open Trim	Narrow	No	White	No	576
7B2W TOR R24	745975231416	6" Baffle Trim	Narrow	No	White	No	576
7B2 TOR R12	745975231911	6" Baffle Trim	Narrow	No	Black	No	1440
7E1 TOR R6	784231085455	6" Eyeball Trim	Narrow	No	White	No	300

CS Denotes Contractor Select Product

Dimensions

	702	7B2W	7B2	7E1
Max Lamp Wattages (IC)	65 BR30; 75 PAR30	65 BR30; 75 PAR30	65 BR30; 75 PAR30	65 BR30; 75 PAR30
	<p>Technical drawing of the 702 trim showing dimensions: Total height is 6-1/8". The flange has an outer diameter of 7-5/8" and an inner diameter of 5-7/8".</p>	<p>Technical drawing of the 7B2W trim showing dimensions: Total height is 6". The flange has an outer diameter of 7-5/8" and an inner diameter of 5-7/8".</p>	<p>Technical drawing of the 7B2 trim showing dimensions: Total height is 6". The flange has an outer diameter of 7-5/8" and an inner diameter of 5-7/8".</p>	<p>Technical drawing of the 7E1 trim showing dimensions: Total height is 4". The flange has an outer diameter of 7-5/8" and an inner diameter of 4-7/8".</p>

LC6



Features


- Recessed housing rated IC/Non-IC for new construction
- Injection-molded frame with aluminum can, providing superior thermal performance for a wider range of trims
- Factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Engineering-grade thermoplastic junction box with four built-in Romex® clamps
- Pre-assembled poke-home connectors for ease of wiring

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Finish	Lamp Included	Pallet Quantity
LC6 R6	784231051146	6" Airtight IC/Non-IC New Construction Housing	Incandescent	120V	Black	No	120

Dimensions

LC6

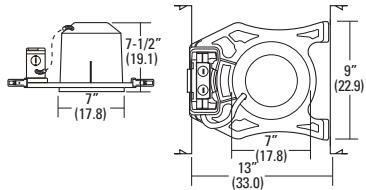

6" Trims

6" Trims

Features

- These trims are compatible with LC6 and LI6 housings
- Baffle, eyeball and open trims are damp location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing



Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
702 TOR R24	745975280780	6" Open Trim	Narrow	No	White	No	576
7B2W TOR R24	745975231416	6" Baffle Trim	Narrow	No	White	No	576
7B2 TOR R12	745975231911	6" Baffle Trim	Narrow	No	Black	No	1440
7E1 TOR R6	784231085455	6" Eyeball Trim	Narrow	No	White	No	300

CS Denotes Contractor Select Product

Dimensions

	702	7B2W/7B2	7E1
Max Lamp Wattages (IC)	65 BR30; 75 PAR30	65 BR30; 75 PAR30	65 BR30; 75 PAR30

Downlighting

L7XP | L7XPR



Features


- Recessed housings rated IC for new construction or remodel applications
- New construction housings with factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housings with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Suitable for ceilings up to 1½" thick

Ordering Information


Catalog Number	UPC	Description	Lamp Source	Voltage	Finish	Lamp Included	Pallet Quantity
L7XP	784231104170	6" Airtight IC New Construction Shallow Housing	Incandescent	120V	Gray	No	102
L7XPR	745973344965	6" Airtight IC Remodel Shallow Housing	Incandescent	120V	Gray	No	96

Dimensions

L7XP

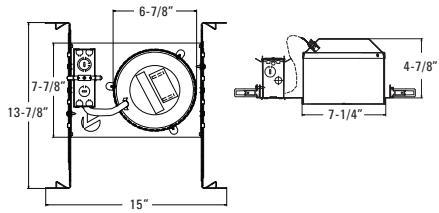

L7XPR

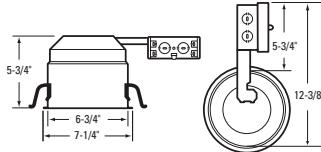

Features

- These trims are compatible with L7XP and L7XPR housings
- Baffle and open trims that are damp location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing
- Trim retention (TOR) — two side-mounted torsion springs on the trim and two receiving brackets in the can to ensure a consistently tight fit with the ceiling



Open



White Baffle



Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
7B1W TOR R24	784231109984	6" Baffle Trim	Wide	Yes	White	No	1440
CO1 R6	745973753095	6" Open Trim	Wide	Yes	White	No	450
CB1W R6	745973753309	6" Baffle Trim	Wide	Yes	White	No	450

CS Denotes Contractor Select Product

Dimensions

	7B1W	CO1	CB1W
Max Lamp Wattages (IC)	 5-3/4" 4-1/4" 7-5/8"	 4-1/4" 7-3/4"	 4-5/8" 7-5/8"
Max Lamp Wattages (IC)	65 BR30; 75 PAR30	65 BR30; 75 PAR30	65 BR30; 75 PAR30

LCP



Features


- Recessed incandescent housings rated IC and Non-IC for new construction
- Injection-molded frame with aluminum can, providing superior thermal performance for a wider range of trims
- Factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Engineering-grade thermoplastic junction box with four built-in Romex® clamps
- Pre-assembled poke-home connectors for ease of wiring

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Finish	Lamp Included	Pallet Quantity
LCP R6	784231051108	6" Airtight IC/Non-IC New Construction, Shallow Housing	Incandescent	120V	Black	No	144

Dimensions

LCP

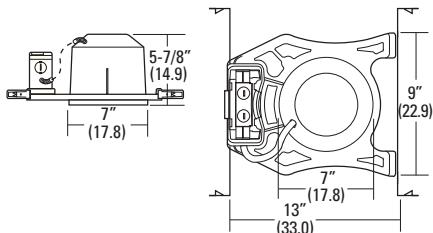

6" Shallow Trims

Features

- These trims are compatible with LCP housings
- Baffle and open trims that are damp location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing
- Trim retention (TOR) — two side-mounted torsion springs on the trim and two receiving brackets in the can to ensure a consistently tight fit with the ceiling



Open

White Baffle



Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
7B1W TOR R24	784231109984	6" Baffle Trim	Wide	Yes	White	No	1440
CO1 R6	745973753095	6" Open Trim	Wide	Yes	White	No	456
CB1W R6	745973753309	6" Baffle Trim	Wide	Yes	White	No	450

Denotes Contractor Select Product

Dimensions

	7B1W	CO1	CB1W
Max Lamp Wattages (IC)	65 BR30; 75 PAR30	65 BR30; 75 PAR30	65 BR30; 75 PAR30

L5 | L5R



Features


- Recessed housings rated IC for new construction or remodel applications
- New construction housings with factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housings with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Suitable for ceilings up to 1½" thick

Ordering Information


Catalog Number	UPC	Description	Lamp Source	Voltage	Socket	Pallet Quantity
L5 R6	745973345160	5" Airtight IC New Construction Housing	Incandescent	120V	E26 Screw Shell	144
L5R R6	745973345276	5" Airtight IC Remodel Housing	Incandescent	120V	E26 Screw Shell	144

Dimensions

L5

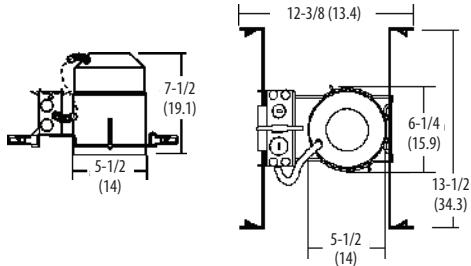

L5R

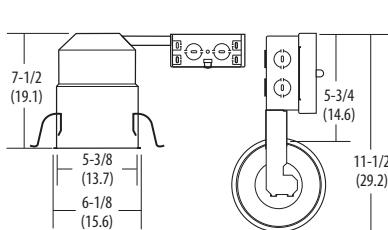

Features

- These trims are compatible with L5 and L5R housings
- Baffle and open trims that are damp location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing
- Trim retention (TOR) — two side-mounted torsion springs on the trim and two receiving brackets in the can to ensure a consistently tight fit with the ceiling




Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
502 TOR R12	745975375592	5" Open Trim	Narrow	N/A	White	No	1008
5B2W TOR R12	745975234097	5" Baffle Trim	Narrow	N/A	White	No	720
5B2 TOR R12	745975234110	5" Baffle Trim	Narrow	N/A	Black	No	720
5G2MW PAR30 R6	745976399689	5" Adjustable Gimbal Trim	Narrow	N/A	White	No	144

Dimensions

	502	5B2W	5B2	5G2
Max Lamp Wattages (I/C)	 65 BR30; 50 R20; 75 PAR30	 65 BR30; 50 R20; 75 PAR30	 65 BR30; 50 R20; 75 PAR30	 75 PAR30

L3 | L3R

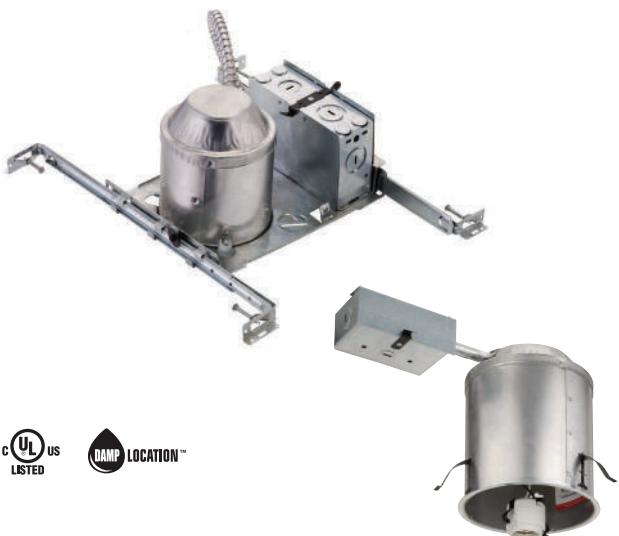

Features

- Recessed housing rated IC/Non-IC for new construction or remodel applications
- New construction housings with factory-installed captive bar hangers that span 24" and feature built-in nailers and T-bar clips
- Remodel housings with heavy-gauge galvanized steel raceway arm and remodel clips for installation in plaster, sheetrock or mechanical ceilings
- Suitable for ceilings up to 1½" thick


Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Socket	Pallet Quantity	
L3 R6	745973345313	4" Airtight IC/Non-IC New Construction Housing	Incandescent	120V	E26 Screw Shell	144	
L3R R6	745973345566	4" Airtight IC/Non-IC Remodel Housing	Incandescent	120V	E26 Screw Shell	312	

Denotes Contractor Select Product

Dimensions

L3

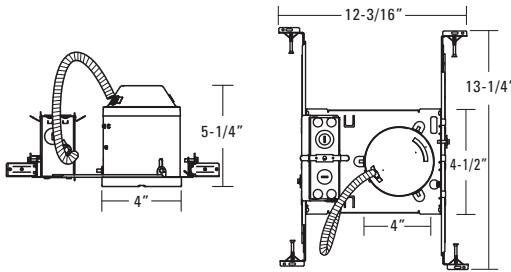

4" Trims

4" Trims

Features

- These trims are compatible with L3 and L3R housings
- Baffle, eyeball and open trims that are damp location listed
- WETlite™ trims that are wet location listed
- Trim retention (clips) — retaining clips riveted to top of reflector to hold trim inside housing



Ordering Information

Catalog Number	UPC	Description	Flange Range	Finish	Lamp Included	Pallet Quantity	CS
301 R12	745975234158	4" Open Trim	Wide	White	No	1344	CS
3B1W R24	745975234264	4" Baffle Trim	Wide	White	No	1536	CS
3B1	745975234295	4" Baffle Trim	Wide	Black	No	1296	
3B2W	745975281015	4" Baffle Trim	Narrow	White	No	1536	
3E1 R6	745973752937	4" Eyeball Trim	Narrow	White	No	756	
3H20 R6	745975281060	4" PAR30 WETlite Trim	Stepped	White	Yes	630	

CS Denotes Contractor Select Product

Dimensions

	301	3B1W	3B1	3B2W	3E1	3H20
Max Lamp Wattages						
IC	30 R20; 35 PAR20 50 PAR20	35 PAR20; 50 PAR20; 50 R20 50 PAR20	35 PAR20 50 PAR20	30 R20; 35 PAR20 50 R20	50 PAR20 50 R20	75 PAR30 (short neck) —
NON-IC						
	4-3/4" 3-1/2" 4-7/8"	4-3/4" 3-1/2" 4-7/8"	4-3/4" 3-1/2" 4-7/8"	5-1/4" 3-1/2" 4-7/8"	4" 2-5/8" 3-1/2" 4-7/8"	3" 4" 5-1/4"

Downlighting