

Outdoor





- | | |
|------------|-----------------------|
| 120 | LED Wall Mounted |
| 132 | LED Floodlights |
| 137 | LED Canopy / Garage |
| 138 | LED Security Lighting |

TWH LED | TWP LED



Features

- Easily replace 70W-400W HID, providing an 83% energy savings
- Ideal replacement for outdoor storage areas, warehouse and factory perimeters, and loading docks
- The adjustable light output (ALO) allows contractors to easily adjust light level during installation
- High-performance optics deliver exceptional light uniformity
- Individual LED optics to deliver more lumens to the target area
- Choice of cast/glass (TWH) or vandal-resistant polycarbonate (TWP) front cover
- Expected service life 20 years
- 5-year warranty


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens (Adjustable)	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity	CS
TWH LED ALO 40K	191848355251	LED Wall Pack, Glass Lens	70W-400W HID	2,000-9,200	16W to 78W	4000K	120-277V	Dark Bronze	No	Yes	20	CS
TWH LED ALO 50K	191848355329	LED Wall Pack, Glass Lens	70W-400W HID	2,000-9,200	16W to 78W	5000K	120-277V	Dark Bronze	No	Yes	20	CS
TWP LED ALO 40K	191848355237	LED Wall Pack, Polycarbonate Lens	70W-250W HID	1,100-5,100	11W to 48W	4000K	120-277V	Dark Bronze	No	Yes	20	
TWP LED ALO 50K	191848355312	LED Wall Pack, Polycarbonate Lens	70W-250W HID	1,100-5,100	11W to 48W	5000K	120-277V	Dark Bronze	No	Yes	20	CS


CS Denotes Contractor Select Product

Dimensions

TWH LED

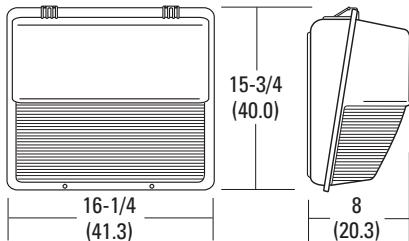

TWP LED

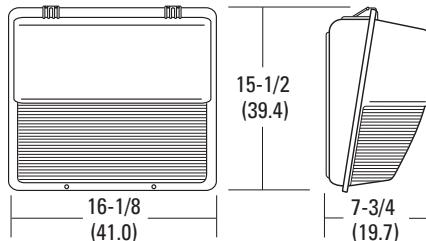

Features

- Easily replace 150W-400W HID, providing an 83% energy savings
- Ideal replacement for outdoor security and perimeter lighting in commercial applications
- The adjustable light output (ALO) allows contractors to easily adjust light level during installation
- Classic dayform for a traditional appearance and advanced LEDs for high performance
- Designed for mounting to recessed junction box or surface wiring via conduit entry points
- Expected service life 20 years
- 5-year warranty



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens (Adjustable)	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
TWR1 LED ALO 40K MVOLT DDBTXD	193047637084	LED Wall Pack with Adjustable Light Output, Glass Lens	70W to 250W MH	1,100-6,200	9W to 51W	4000K	120-277V	Dark Bronze	No	Yes	60
TWR1 LED ALO 50K MVOLT DDBTXD	193047637718	LED Wall Pack with Adjustable Light Output, Glass Lens	70W to 250W MH	1,100-6,200	9W to 51W	5000K	120-277V	Dark Bronze	No	Yes	60
TWR2 LED ALO 40K MVOLT DDBTXD	193047218542	LED Wall Pack with Adjustable Light Output, Glass Lens	150W to 400W MH	3,050-11,800	21W to 87W	4000K	120-277V	Dark Bronze	No	Yes*	60
TWR2 LED ALO 50K MVOLT DDBTXD	193047218627	LED Wall Pack with Adjustable Light Output, Glass Lens	150W to 400W MH	3,050-11,800	21W to 87W	5000K	120-277V	Dark Bronze	No	Yes*	60

Denotes Contractor Select Product


*Products are on the DLC Premium Qualified Products List.

Dimensions

TWR1 LED

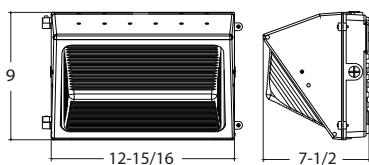

TWR2 LED

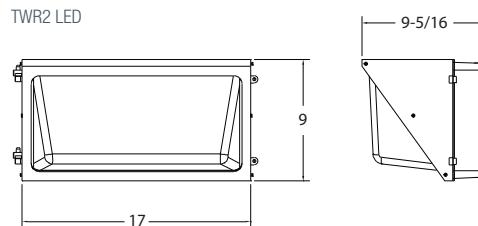

OLWX1 LED



Features

- Easily replace 70W-250W HID, providing an 83% energy savings
- Ideal for outdoor applications such as building perimeters, loading areas, driveways, as well as illuminating signs and buildings
- High-performance LEDs behind clear glass for maximum light output
- Suitable for wet locations; may be inverted
- Floodlighting accessories that convert wall pack into floodlight
- Expected service life 20 years
- 5-year warranty



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity	CS
OLWX1 LED 13W 40K M4	888791000115	LED Low Profile Wall Pack	70W HID	1,300	14W	4000K	120-277V	Dark Bronze	No	Yes	160	CS
OLWX1 LED 13W 50K M4	888791000122	LED Low Profile Wall Pack	70W HID	1,300	14W	5000K	120-277V	Dark Bronze	No	Yes	160	
OLWX1 LED 20W 40K M4	888791000184	LED Low Profile Wall Pack	175W HID	2,700	20W	4000K	120-277V	Dark Bronze	No	Yes	160	CS
OLWX1 LED 20W 50K M4	888791000191	LED Low Profile Wall Pack	175W HID	2,700	19W	5000K	120-277V	Dark Bronze	No	Yes	160	
OLWX1 LED 40W 40K M4	888791000696	LED Low Profile Wall Pack	250W HID	4,000	39W	4000K	120-277V	Dark Bronze	No	Yes	160	CS
OLWX1 LED 40W 50K M4	888791000726	LED Low Profile Wall Pack	250W HID	4,000	37W	5000K	120-277V	Dark Bronze	No	Yes	160	

CS Denotes Contractor Select Product

Accessories

Catalog Number	UPC	Description
OLWX1THK M12	888791000801	OLWX1 Floodlight Mount, Knuckle
OLWX1TS M12	888791000771	OLWX1 Floodlight Mount, Slipfitter
OLWX1YK M12	888791000795	OLWX1 Floodlight Mount, Yoke

Dimensions



Features

- Easily replace 400W HID, providing an 83% energy savings
- Ideal for outdoor applications such as building perimeters, loading areas, driveways, as well as illuminating signs and buildings
- High-performance LEDs behind clear glass for maximum light output
- Suitable for wet locations; may be inverted
- Floodlighting accessories that convert wall pack into floodlight
- Expected service life 20 years
- 5-year warranty




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLWX2 LED 90W 40K DDB M2	888791000818	LED Low Profile Wall Pack	400W HID	9,900	78W	4000K	120-277V	Dark Bronze	No	Yes	24
OLWX2 LED 90W 50K DDB M2	888791000832	LED Low Profile Wall Pack	400W HID	10,000	78W	5000K	120-277V	Dark Bronze	No	Yes	24

Denotes Contractor Select Product

Dimensions

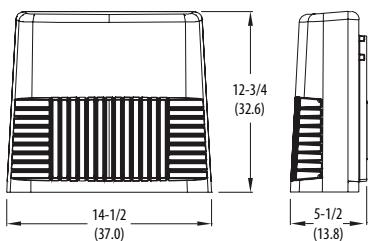

OLW LED



Features

- Ideal for lighting building facades, parking areas, walkways, garages and loading areas
- Weather-resistant aluminum housing and clear polycarbonate lens that protects the optics from moisture, dirt and other contaminants
- Precision optics, putting light where you need it that provide great uniformity and optimum luminaire spacing
- Dusk-to-dawn photocell for additional energy savings
- Full cutoff standard on OLW 23 and OLW 31; shield available as option on OLW14
- Expected service life 20 years
- 5-year warranty

Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLW14 M2	745977919336	LED Wall Pack	50W HID	1,500	18W	5000K	120-277V	Bronze	Yes	Yes	128
OLW14 WH M2	784231432594	LED Wall Pack	50W HID	1,500	18W	5000K	120-277V	White	Yes	Yes	128
OLW 23 M2	784231814574	LED Wall Pack	100W HID	3,000	31W	5000K	120-277V	Dark Bronze	Yes	Yes	96
OLW 31 M2	784231815458	LED Wall Pack	250W HID	4,300	45W	5000K	120-277V	Dark Bronze	Yes	Yes	96
OLW 31 WH M2	753573385509	LED Wall Pack	250W HID	4,300	45W	5000K	120-277V	White	Yes	Yes	96

Accessories


Catalog Number	UPC	Description
FCOS M24	784231337462	OLW14 Full Cutoff Shield

Dimensions

OLW14



OLW 23/OLW 31





TWS LED



Features

- Ideal for providing outdoor security and perimeter lighting in commercial applications
- Same durable construction as our traditional wall packs but with long-life, energy-efficient LEDs
- Dusk-to-dawn photocell for additional energy savings
- Expected service life 20 years
- 5-year warranty



Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
TWS LED P1 50K 120 PE DZ	190887149517	LED Wall Pack with Dusk-to-Dawn Photocell	100W HID	1,500	25W	5000K	120V	Dark Bronze	Yes	Yes	144

Denotes Contractor Select Product

Accessories

Catalog Number	UPC	Description
TWSWG U	784231177204	TWS Wire Guard

Dimensions



Features


- Ideal for commercial or residential applications such as driveways, patios, loading areas and warehouses
- Outdoor LED wall pack offering a traditional look
- Dusk-to-dawn photocell for additional energy savings
- Expected service life 20 years
- 5-year warranty



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLWP LED P1 40K 120 PE BZ M4	190887149463	LED Small Wall Pack	42W CFL/70W HID	1,400	23W	4000K	120V	Dark Bronze	Yes	No	320

Dimensions



OVWP LED



Features

- Easily replace 42W CFL, providing an 85% energy savings
- Ideal compact, LED sconce for single- and multi-family entrances, patios, and other decorative wall applications
- ADA compliant, minimalist design with a depth less than 2 ½ inches
- Dusk-to-dawn photocell for additional energy savings
- Designed to easily mount to wall on a recessed junction box




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OVWP LED 40K 120 PE DDB M4	190887648775	LED Wall Sconce	42W CFL	1,200	14W	4000K	120V	Dark Bronze	Yes	No	512
OVWP LED 40K 120 PE WH M4	190887648812	LED Wall Sconce	42W CFL	1,200	14W	4000K	120V	White	Yes	No	512

Denotes Contractor Select Product

Dimensions





OLCS LED | OLLW LED



Features


- Ideal for residential and commercial outdoor applications such as walkways and stairways requiring nearly maintenance-free, general security illumination
- Designed to easily mount to recessed junction box
- Cast-aluminum housing that provides superior resistance to weathering
- Expected service life 20 years

Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLCS 8 DDB M4	753573525059	LED Sconce	60W Incandescent	500	9W	4000K	120V	Dark Bronze	No	No	96
OLCS 8 WH M4	753573827788	LED Sconce	60W Incandescent	500	9W	4000K	120V	White	No	No	96
OLLWD LED P1 40K MVOLT DDB M6	190887242584	LED 1-Light Sconce	75W Incandescent	500	9W	4000K	120-277V	Dark Bronze	No	No	540
OLLWU LED P1 40K MVOLT DDB M6	190887149715	LED 2-Light Sconce	75W Incandescent	1,000	14W	4000K	120-277V	Dark Bronze	No	No	432

Dimensions


OLCS

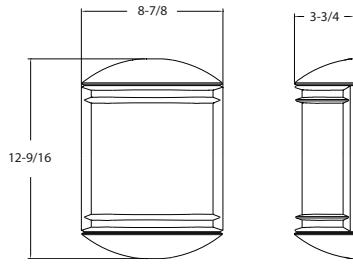

OLLWD



OLLWU





QTE LED P1 | QTE LED P2



Features

- Easily replace 150W-300W quartz halogen, providing an 85% energy savings
- Ideal for illuminating yards, driveways, warehouses, signage and general outdoor floodlighting applications
- Budget friendly, allowing payback within one year
- Knuckle and yoke options available. Knuckle comes with junction box mounting plate
- 5-year warranty


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
QTE LED P1 40K 120 THK DDB M6	191848090787	LED Floodlight, Threaded Knuckle	150W Halogen	2,500	24W	4000K	120V	Dark Bronze	No	Yes	163
QTE LED P1 40K 120 THK WH M6	191848090893	LED Floodlight, Threaded Knuckle	150W Halogen	2,500	24W	4000K	120V	White	No	Yes	163
QTE LED P1 40K 120 YK DDB M6	191848090817	LED Floodlight, Yoke	150W Halogen	2,500	24W	4000K	120V	Dark Bronze	No	Yes	163
QTE LED P1 40K 120 YK WH M6	191848093313	LED Floodlight, Yoke	150W Halogen	2,500	24W	4000K	120V	White	No	Yes	163
QTE LED P1 50K 120 THK DDB M6	191848090824	LED Floodlight, Threaded Knuckle	150W Halogen	2,500	24W	5000K	120V	Dark Bronze	No	Yes	163
QTE LED P1 50K 120 THK WH M6	191848093375	LED Floodlight, Threaded Knuckle	150W Halogen	2,500	24W	5000K	120V	White	No	Yes	163
QTE LED P1 50K 120 YK DDB M6	191848090909	LED Floodlight, Yoke	150W Halogen	2,500	24W	5000K	120V	Dark Bronze	No	Yes	163
QTE LED P1 50K 120 YK WH M6	191848093429	LED Floodlight, Yoke	150W Halogen	2,500	24W	5000K	120V	White	No	Yes	163
QTE LED P2 40K 120 THK DDB M6	191848093436	LED Floodlight, Threaded Knuckle	300W Halogen	4,000	40W	4000K	120V	Dark Bronze	No	Yes	162
QTE LED P2 40K 120 THK WH M6	191848092613	LED Floodlight, Threaded Knuckle	300W Halogen	4,000	40W	4000K	120V	White	No	Yes	162
QTE LED P2 40K 120 YK DDB M6	191848093474	LED Floodlight, Yoke	300W Halogen	4,000	40W	4000K	120V	Dark Bronze	No	Yes	162
QTE LED P2 40K 120 YK WH M6	191848092583	LED Floodlight, Yoke	300W Halogen	4,000	40W	4000K	120V	White	No	Yes	162
QTE LED P2 50K 120 THK DDB M6	191848093498	LED Floodlight, Threaded Knuckle	300W Halogen	4,000	40W	5000K	120V	Dark Bronze	No	Yes	162
QTE LED P2 50K 120 THK WH M6	191848092576	LED Floodlight, Threaded Knuckle	300W Halogen	4,000	40W	5000K	120V	White	No	Yes	162
QTE LED P2 50K 120 YK DDB M6	191848093535	LED Floodlight, Yoke	300W Halogen	4,000	40W	5000K	120V	Dark Bronze	No	Yes	162
QTE LED P2 50K 120 YK WH M6	191848092569	LED Floodlight, Yoke	300W Halogen	4,000	40W	5000K	120V	White	No	Yes	162




Denotes Contractor Select Product

Dimensions

QTE LED P1



QTE LED P2



Features

- Easily replace 500W quartz halogen, providing an 85% energy savings
- Ideal for illuminating yards, driveways, warehouses, signage and general outdoor floodlighting applications
- Budget friendly, allowing payback within one year
- Knuckle and yoke options available. Knuckle comes with junction box mounting plate
- 5-year warranty




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
QTE LED P3 40K 120 THK DDB M6	191848092590	LED Floodlight, Threaded Knuckle	500W Halogen	6,750	66W	4000K	120V	Dark Bronze	No	Yes	108 CS
QTE LED P3 40K 120 THK WH M6	191848092538	LED Floodlight, Threaded Knuckle	500W Halogen	6,750	66W	4000K	120V	White	No	Yes	108
QTE LED P3 40K 120 YK DDB M6	191848092606	LED Floodlight, Yoke	500W Halogen	6,750	66W	4000K	120V	Dark Bronze	No	Yes	108 CS
QTE LED P3 40K 120 YK WH M6	191848092552	LED Floodlight, Yoke	500W Halogen	6,750	66W	4000K	120V	White	No	Yes	108
QTE LED P3 50K 120 THK DDB M6	191848092514	LED Floodlight, Threaded Knuckle	500W Halogen	6,750	66W	5000K	120V	Dark Bronze	No	Yes	108
QTE LED P3 50K 120 THK WH M6	191848092521	LED Floodlight, Threaded Knuckle	500W Halogen	6,750	66W	5000K	120V	White	No	Yes	108
QTE LED P3 50K 120 YK DDB M6	191848092545	LED Floodlight, Yoke	500W Halogen	6,750	66W	5000K	120V	Dark Bronze	No	Yes	108
QTE LED P3 50K 120 YK WH M6	191848092453	LED Floodlight, Yoke	500W Halogen	6,750	66W	5000K	120V	White	No	Yes	108

CS Denotes Contractor Select Product

Dimensions

QTE LED P3

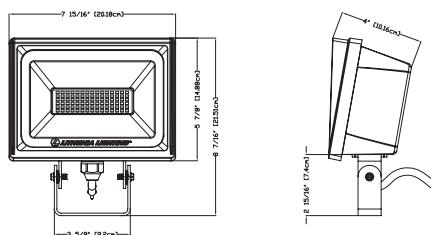

TFX1 LED | TFX2 LED



Features

- Cost-effective, energy-efficient, long-life solutions that replace HID floodlights without skimping on lumens
- Threaded knuckle, yoke and integral slipfitter options make installation easy
- Expected service life of over ten years and excellent LED lumen maintenance
- Die-cast aluminum main body with optimal thermal management that both enhances LED efficacy and extends component life
- 5-year warranty




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
TFX1 LED 40K MVOLT THK DDBXD	193047670173	LED Floodlight, Threaded Knuckle	150W HID	7,300	54	4000K	MVOLT	Dark Bronze	No	Yes	180
TFX1 LED 40K MVOLT YK DDBXD	193047670180	LED Floodlight, Yoke	150W HID	7,300	54	4000K	MVOLT	Dark Bronze	No	Yes	180
TFX1 LED 40K MVOLT THK DWHXD	193047670197	LED Floodlight, Threaded Knuckle	150W HID	7,300	54	4000K	MVOLT	White	No	Yes	180
TFX1 LED 40K MVOLT YK DWHXD	193047670227	LED Floodlight, Yoke	150W HID	7,300	54	4000K	MVOLT	White	No	Yes	180
TFX2 LED 40K MVOLT IS DDBXD	193047670241	LED Floodlight, Slipfitter	250W HID	13,200	94	4000K	MVOLT	Dark Bronze	No	Yes	45
TFX2 LED 40K MVOLT YK DDBXD	193047670234	LED Floodlight, Yoke	250W HID	13,200	94	4000K	MVOLT	Dark Bronze	No	Yes	63


CS Denotes Contractor Select Product

Dimensions


TFX1 LED THK

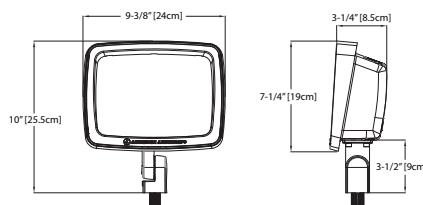


TFX1 LED YK

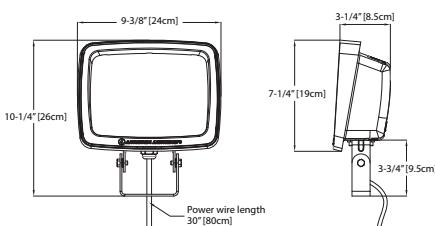

TFX2 LED IS

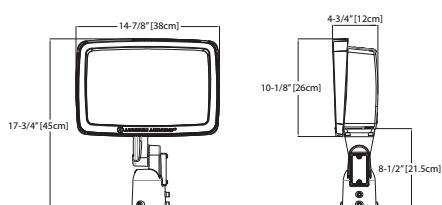

TFX2 LED YK

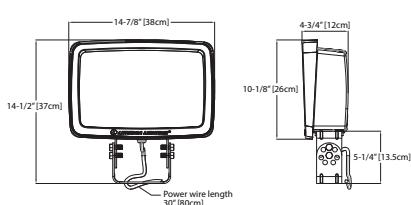

Features

- Cost-effective, energy-efficient, long-life solutions that replace HID floodlights without skimping on lumens
- Threaded knuckle, yoke and integral slipfitter options make installation easy
- Expected service life of over ten years and excellent LED lumen maintenance
- Die-cast aluminum main body with optimal thermal management that both enhances LED efficacy and extends component life
- 5-year warranty




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
TFX3 LED 40K MVOLT IS DDBXD	193047670265	LED Floodlight, Slipfitter	400W HID	25,600	188	4000K	MVOLT	Dark Bronze	No	Yes	24
TFX3 LED 40K MVOLT YK DDBXD	193047670258	LED Floodlight, Yoke	400W HID	25,600	188	4000K	MVOLT	Dark Bronze	No	Yes	24
TFX3 LED 40K HVOLT IS DDBXD	193047670289	LED Floodlight, Slipfitter	400W HID	25,600	188	4000K	HVOLT	Dark Bronze	No	Yes	24
TFX3 LED 40K HVOLT YK DDBXD	193047670296	LED Floodlight, Yoke	400W HID	25,600	188	4000K	HVOLT	Dark Bronze	No	Yes	24
TFX4 LED 40K MVOLT IS DDBXD	193047670302	LED Floodlight, Slipfitter	1000W HID	41,000	296	4000K	MVOLT	Dark Bronze	No	Yes	20
TFX4 LED 40K MVOLT YK DDBXD	193047670326	LED Floodlight, Yoke	1000W HID	41,000	296	4000K	MVOLT	Dark Bronze	No	Yes	20
TFX4 LED 40K HVOLT IS DDBXD	193047670333	LED Floodlight, Slipfitter	1000W HID	41,700	286	4000K	HVOLT	Dark Bronze	No	Yes	20
TFX4 LED 40K HVOLT YK DDBXD	193047670340	LED Floodlight, Yoke	1000W HID	41,700	286	4000K	HVOLT	Dark Bronze	No	Yes	20


CS Denotes Contractor Select Product

Dimensions


TFX3 LED IS

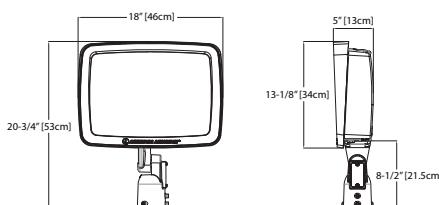


TFX3 LED YK

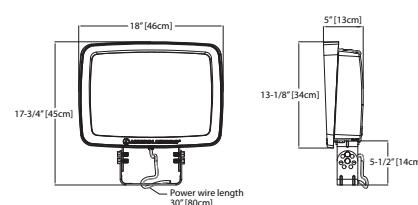

TFX4 LED IS

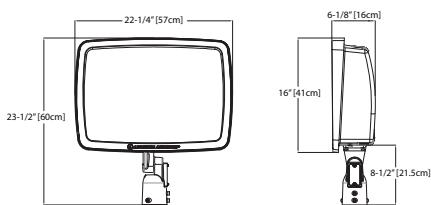

TFX4 LED YK

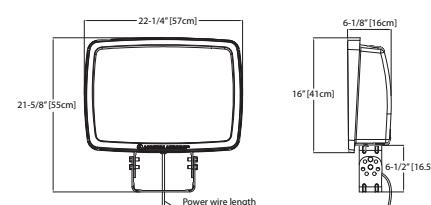

RSXF



Features

- Available in three sizes, offering a lumen range of 4,000 to 40,000 lumens
- Easy replacement for 100W to 1000W HID luminaires
- Adjustable integral slipfitter allows the luminaire to mount over any existing 2-3/8" O.D. tenon
- Integral wiring compartment allows for fast, easy mounting and wiring without opening the electrical compartment saving time during installation
- Includes a field adjustable output device that allows the contractor to dim the luminaire to the appropriate lumens and watts
- 5-year warranty


Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens*	Input Watts*	CCT	Voltage	Finish	DLC^	Pallet Quantity
RSXF1 LED P4 40K WFL MVOLT IS FAO DDBXD	191848733103	RSXF1 LED Flood Luminaire, Wide Flood, Integral Slipfitter	100W to 400W MH	16,000 to 17,200	133W	4000K	120-277V	Dark Bronze	Yes	20
RSXF2 LED P6 40K WFL MVOLT IS FAO DDBXD	191848733110	RSXF2 LED Flood Luminaire, Wide Flood, Integral Slipfitter	250W to 1000W MH	29,000 to 31,000	244W	4000K	120-277V	Dark Bronze	Yes	15
RSXF3 LED P4 40K WFL MVOLT IS FAO DDBXD	191848733134	RSXF3 LED Flood Luminaire, Wide Flood, Integral Slipfitter	400W to 1000W MH	38,400 to 41,100	312W	4000K	120-277V	Dark Bronze	Yes	10


*Note: Luminaire shipped at maximum setting for lumens and wattage. ^Products are on the DLC Premium Qualified Products List.

Dimensions


RSXF1



RSXF2

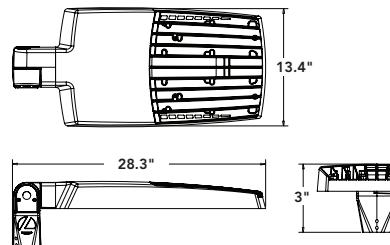

RSXF3

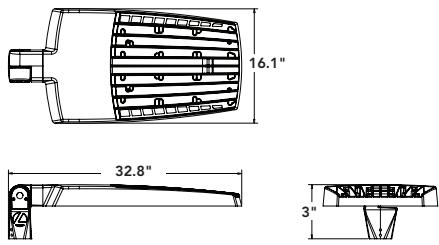

Features

- Easily replace 400W HID, providing an 83% energy savings
- Ideal canopy lighting solution for walkways, malls, retail stores and schools
- Quick installation feature, no need to open the luminaire for wiring during installation, saving time and money
- Designed for mounting on a junction box, surface or pendant
- 10" x 10" and 14" x 14" sizes, five lumen packages available
- 5-year warranty




Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity	CS
CNY LED P0 40K MVOLT DDB M4	193047085991	LED Canopy	400W HID	3,500	27W	4000K	122-277V	Dark Bronze	No	Yes	96	CS
CNY LED P0 40K MVOLT WH M4	193047086004	LED Canopy	400W HID	3,500	27W	4000K	122-277V	White	No	Yes	96	CS
CNY LED P1 40K MVOLT DDB M2	191848093320	LED Canopy	400W HID	4,500	35W	4000K	120-277V	Dark Bronze	No	Yes	96	CS
CNY LED P1 40K MVOLT WH M2	191848112076	LED Canopy	400W HID	4,500	35W	4000K	120-277V	White	No	Yes	96	
CNY LED P1 50K MVOLT DDB M2	191848093337	LED Canopy	400W HID	4,500	35W	5000K	120-277V	Dark Bronze	No	Yes	96	
CNY LED P1 50K MVOLT WH M2	191848112083	LED Canopy	400W HID	4,500	35W	5000K	120-277V	White	No	Yes	96	
CNY LED P2 40K MVOLT DDB M2	191848093344	LED Canopy	400W HID	6,600	52W	4000K	120-277V	Dark Bronze	No	Yes	96	CS
CNY LED P2 50K MVOLT DDB M2	191848093351	LED Canopy	400W HID	6,600	52W	5000K	120-277V	Dark Bronze	No	Yes	96	
CNY LED P3 40K MVOLT DDB M2	191848093443	LED Canopy	400W HID	11,000	86W	4000K	120-277V	Dark Bronze	No	Yes	96	CS
CNY LED P3 50K MVOLT DDB M2	191848093542	LED Canopy	400W HID	11,000	86W	5000K	120-277V	Dark Bronze	No	Yes	96	
CNY LED P4 40K MVOLT DDB M2	191848093559	LED Canopy	400W HID	13,900	109W	4000K	120-277V	Dark Bronze	No	Yes	96	
CNY LED P4 50K MVOLT DDB M2	191848093566	LED Canopy	400W HID	13,900	109W	5000K	120-277V	Dark Bronze	No	Yes	96	



CS Denotes Contractor Select Product

Dimensions

CNY LED P0/P1/P2



CNY LED P3/P4



Accessories

Catalog Number	UPC	Description
CNYBCP	191848778654	14 Inch x 14 Inch Beauty Cover Plate

OLAW23 LED | TDD LED



Features

- Designed to provide years of nearly maintenance-free illumination for outdoor applications such as building facades, building perimeters, parking areas, walkways, garages and service roads
- Weather-resistant aluminum housing; clear polycarbonate lens that protects the optics from moisture, dirt and other contaminants
- Wall or arm mounting; all mounting hardware included (mounting arm sold separately)
- Expected service 20 years
- 5-year warranty



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLAW23 53K 120 PE BZ M2	784231606162	LED Security Light, Adjustable Photocell	65W CFL	2,300	35W	5000K	120V	Bronze	Yes	No	120
TDD LED P1 40K 120 PE DNA M4	190887149562	LED Security Light, Button Photocell	100W HID	3,000	31W	4000K	120V	Grey	Yes	No	180
TDD2 LED P1 50K 120 PER DNA M4	190887149593	LED Security Light, Twist-Lock Photocell	175W HID	4,700	41W	5000K	120V	Grey	Yes	Yes	64


Denotes Contractor Select Product

Accessories


Catalog Number	UPC	Description
OMA DDB M6	753573174714	18" Steel Mounting Arm, Bronze
OMA M6	745973700907	18" Steel Mounting Arm, Grey

Dimensions


OLAW23



TDD LED



TDD2 LED



Features

- Frosted glass globe that protects LEDs and ensures even light distribution for many general purpose outdoor applications
- Wall or ceiling mounting with integrated wet location junction box
- Cast-aluminum housing with paint in an industrial grey finish
- Sealed gasket that protects against moisture and dust
- Expected service life 10 years
- 5-year warranty




Ordering Information


Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLVTCM M6	753573237433	LED Vapor Tight, Ceiling Mount	150W Incandescent	600	15W	4000K	120-277V	Grey	No	No	270
OLVTWM M6	753573237457	LED Vapor Tight, Wall Mount	150W Incandescent	600	15W	4000K	120-277V	Grey	No	No	144

Dimensions

Ceiling



Wall



OVFL LED



OVFL LED 1RH



OVFL LED 2RH



Features


- Ideal for residential, multi-family and multi-use applications requiring an economical outdoor lighting solution
- 1-head unit — replacement for up to 90W incandescent security light
- 2-head unit — replacement for up to 150W (1-head PAR38) incandescent security light
- Designed to deliver 948 lumens at only 13 input watts
- Budget friendly fixture that pays for itself in approximately 1 year
- Designed to easily mount to ceiling or wall over a recessed junction box

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OVFL LED 1RH P1 40K 120 DDB HP17 M6	190887667264	Value LED Security Floodlight	1-Head PAR38 90W Incandescent	900	13W	4000K	120V	Dark Bronze	No	No	720
OVFL LED 1RH P1 40K 120 WH HP17 M6	190887667295	Value LED Security Floodlight	1-Head PAR38 90W Incandescent	900	13W	4000K	120V	White	No	No	720
OVFL LED 2RH 40K 120 PE DDB HP17 M4	190887648478	Value LED Security Floodlight with Photocell	1-Head PAR38 150W Incandescent	1,800	20W	4000K	120V	Dark Bronze	Yes	No	384
OVFL LED 2RH 40K 120 PE WH HP17 M4	190887648508	Value LED Security Floodlight with Photocell	1-Head PAR38 150W Incandescent	1,800	20W	4000K	120V	White	Yes	No	384
OVFL LED 2RH 40K 120 PE DDB M4	191848261101	Value LED Security Floodlight with Photocell	1-Head PAR38 150W Incandescent	1,800	20W	4000K	120V	Dark Bronze	Yes	No	384
OVFL LED 2RH 40K 120 PE WH M4	889804851038	Value LED Security Floodlight with Photocell	1-Head PAR38 150W Incandescent	1,800	20W	4000K	120V	White	Yes	No	384

Denotes Contractor Select Product

Dimensions

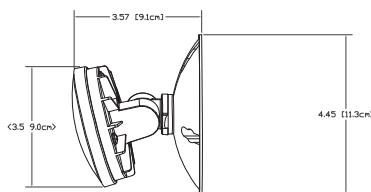

Features

- Designed for residential and commercial outdoor applications such as yards, driveways, patios, loading areas and warehouses
- Cast-aluminum, rear housing and lamp heads that thermally isolate the LEDs and driver, promoting long life
- Motion sensor and photocell options to meet the security needs
- Expected service life 10 years
- Wet location listed for mounting higher than 4' above ground
- 5-year warranty



Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
OLF 2RH 40K 120 MO DDB M6	191848797938	LED Security Floodlight with Motion Sensor	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	Yes	No	216
OLF 2RH 40K 120 MO WH M6	820476314636	LED Security Floodlight with Motion Sensor	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	White	Yes	No	216
OLF 2RH 40K 120 DDB M4	191848261361	LED Security Floodlight	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	No	No	288
OLF 2RH 40K 120 WH M4	889804043785	LED Security Floodlight	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	White	No	No	288
OLF 2RH 40K 120 PE DDB M4	191848261163	LED Security Floodlight with Photocell	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	Yes	No	288
OLF 2RH 40K 120 PE WH M4	889804043723	LED Security Floodlight with Photocell	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	White	Yes	No	288
OLF 2RH 40K 120 DDB M4	191848797921	LED Security Floodlight	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	No	No	252
OLF 3RH 40K 120 WH M4	889804043914	LED Security Floodlight	2-Head PAR38 150W Incandescent	3,100	36W	4000K	120V	White	No	No	240
OLF 3RH 40K 120 DDB M4	191848797969	LED Security Floodlight	2-Head PAR38 150W Incandescent	3,100	36W	4000K	120V	Dark Bronze	No	No	240
OLF 3RH 40K 120 PE DDB M4	191848261361	LED Security Floodlight with Photocell	2-Head PAR38 150W Incandescent	3,100	36W	4000K	120V	Dark Bronze	Yes	No	240

Denotes Contractor Select Product

Dimensions

