


Residential



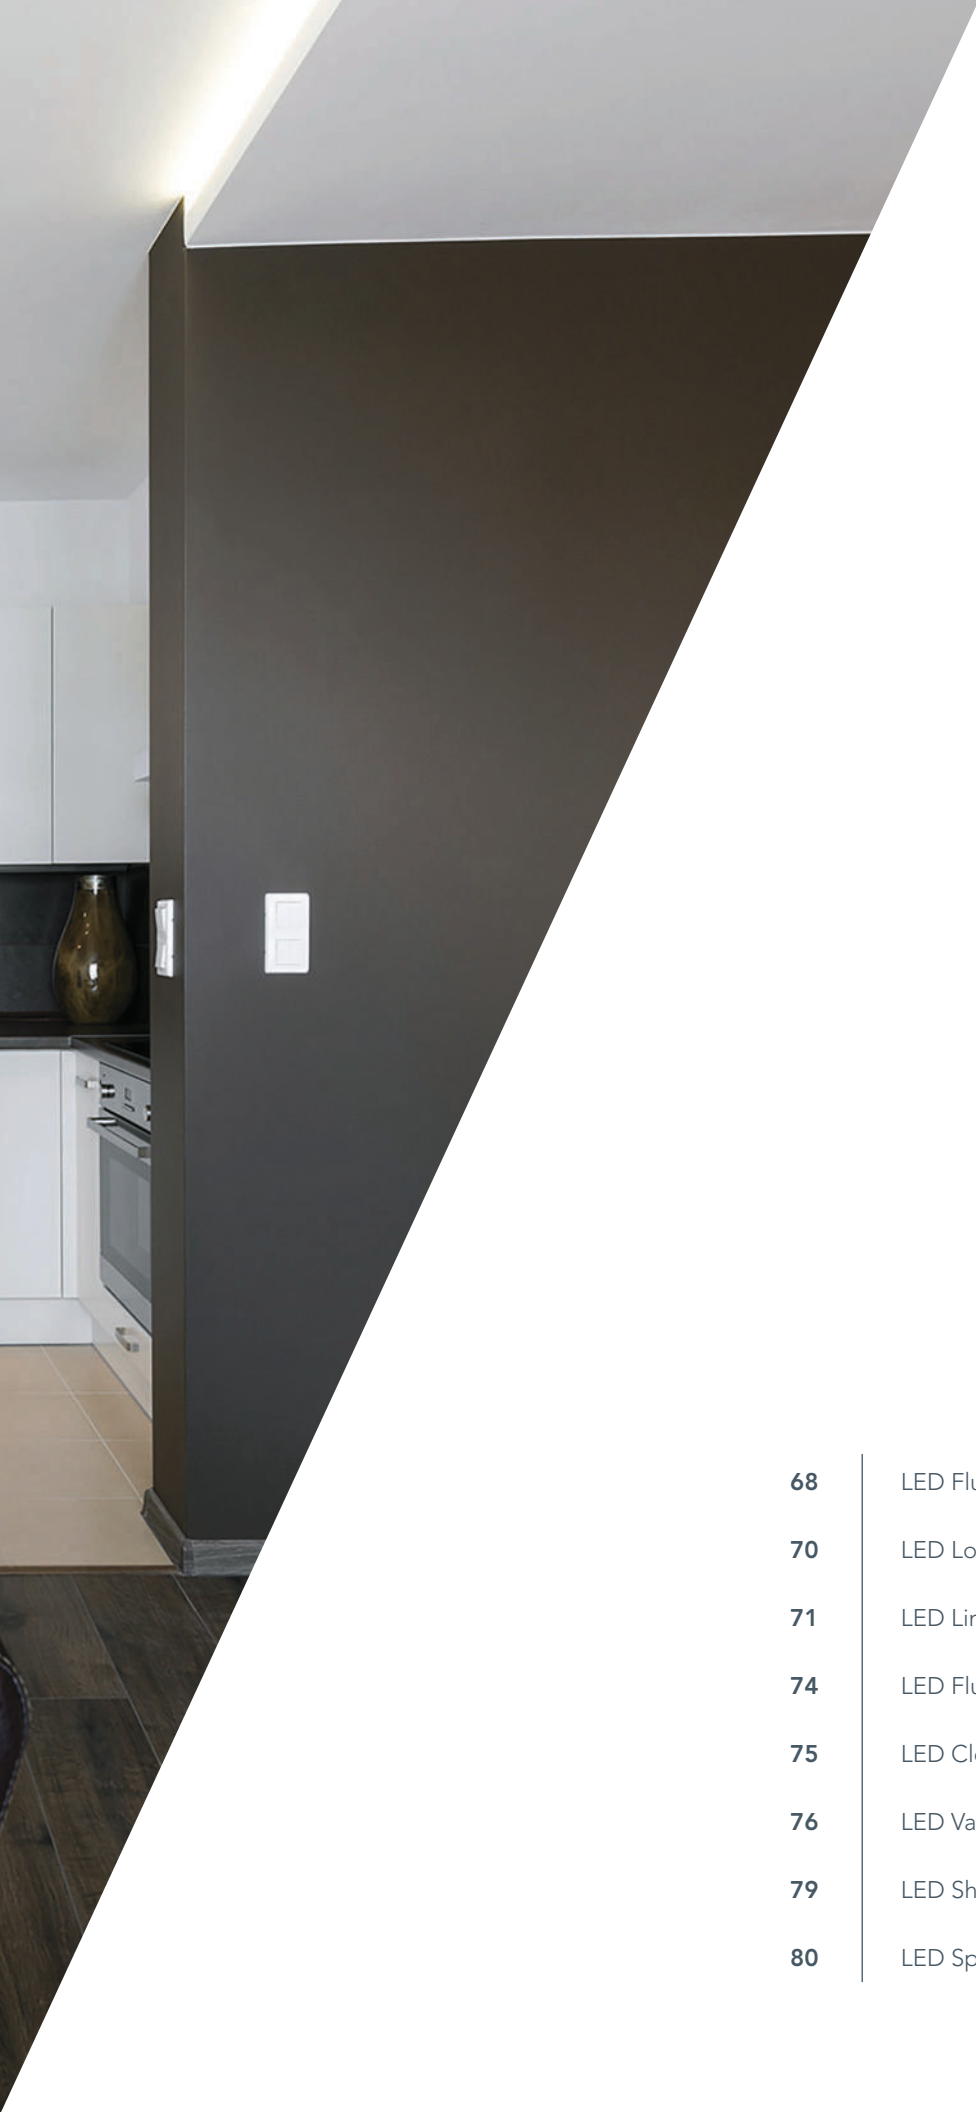

| | |
|----|-----------------------------|
| 68 | LED Flush Mount |
| 70 | LED Low Profile Flush Mount |
| 71 | LED Linear Flush Mount |
| 74 | LED Flush/Semi-Flush Mount |
| 75 | LED Closet Light |
| 76 | LED Vanity |
| 79 | LED Shoplights |
| 80 | LED Specialty |

FMML 7



Features

- Energy-efficient lighting solution for an array of residential and light commercial spaces, such as closets, foyers, hallways, utility work areas, stairways and much more
- Wet location option available
- High-efficiency LED light engine that reduces power consumption up to 84% compared to a 60W incandescent
- Dimmable to 10% on a standard TRIAC dimmer; zero in-rush current
- Designed to provide 70% lumen maintenance for at least 50,000 hours

Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Finish | Pallet Quantity |
|-----------------------|--------------|------------------------------|------------------|--------|-------------|-------|-----|---------|--------|-----------------|
| FMML 7 827 M6 | 820476290114 | 7" Versi Lite™ | 60W Incandescent | 642 | 10W | 2700K | 80 | 120V | White | 540 |
| FMML 7 827 WL M6 | 888791001037 | 7" Versi Lite™, Wet Location | 60W Incandescent | 642 | 10W | 2700K | 80 | 120V | White | 540 |
| FMML 7 830 M6 | 820476182860 | 7" Versi Lite™ | 60W Incandescent | 642 | 10W | 3000K | 80 | 120V | White | 540 CS |
| FMML 7 830 WL DDBT M6 | 820476795909 | 7" Versi Lite™, Wet Location | 60W Incandescent | 642 | 10W | 3000K | 80 | 120V | Bronze | 540 |
| FMML 7 830 WL M6 | 820476780080 | 7" Versi Lite™, Wet Location | 60W Incandescent | 642 | 10W | 3000K | 80 | 120V | White | 540 |
| FMML 7 840 M6 | 753573647355 | 7" Versi Lite™ | 60W Incandescent | 642 | 10W | 4000K | 80 | 120V | White | 540 CS |
| FMML 7 840 WL M6 | 820476881145 | 7" Versi Lite™, Wet Location | 60W Incandescent | 642 | 10W | 4000K | 80 | 120V | White | 540 CS |


CS Denotes Contractor Select Product

Dimensions

FMML 7

Width: 7-1/4" (18.4)

Height: 1-3/4" (4.4)



Features

- Energy-efficient lighting solution for an array of residential and light commercial spaces, such as closets, foyers, hallways, utility work areas, stairways and much more
- Wet location option available
- High-efficiency LED light engine that reduces power consumption up to 84% compared to two 75W incandescent
- Dimmable to 10% on a standard TRIAC dimmer; zero in-rush current
- Designed to provide 70% lumen maintenance for at least 50,000 hours




Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Finish | Pallet Quantity |
|---------------------|--------------|-------------------------------|--------------------|--------|-------------|-------|-----|---------|--------|---|
| FMML 13 827 | 888791432985 | 13" Versi Lite™ | 2-75W Incandescent | 1,800 | 28W | 2700K | 80 | 120V | White | 120 |
| FMML 13 827 DDBT | 888791433050 | 13" Versi Lite™ | 2-75W Incandescent | 1,800 | 28W | 2700K | 80 | 120V | Bronze | 120 |
| FMML 13 827 WL | 888791432817 | 13" Versi Lite™, Wet Location | 2-75W Incandescent | 1,800 | 28W | 2700K | 80 | 120V | White | 120 |
| FMML 13 830 | 888791432961 | 13" Versi Lite™ | 2-75W Incandescent | 1,900 | 28W | 3000K | 80 | 120V | White | 120  |
| FMML 13 830 DDBT | 888791433043 | 13" Versi Lite™ | 2-75W Incandescent | 1,900 | 28W | 3000K | 80 | 120V | Bronze | 120 |
| FMML 13 830 WL | 888791432725 | 13" Versi Lite™, Wet Location | 2-75W Incandescent | 1,900 | 28W | 3000K | 80 | 120V | White | 120 |
| FMML 13 830 WL DDBT | 888791432862 | 13" Versi Lite™, Wet Location | 2-75W Incandescent | 1,900 | 28W | 3000K | 80 | 120V | Bronze | 120 |
| FMML 13 840 | 888791432954 | 13" Versi Lite™ | 2-75W Incandescent | 2,000 | 28W | 4000K | 80 | 120V | White | 120  |
| FMML 13 840 DDBT | 888791433005 | 13" Versi Lite™ | 2-75W Incandescent | 2,000 | 28W | 4000K | 80 | 120V | Bronze | 120 |
| FMML 13 840 WL | 888791432619 | 13" Versi Lite™, Wet Location | 2-75W Incandescent | 2,000 | 28W | 4000K | 80 | 120V | White | 120 |
| FMML 13 840 WL DDBT | 888791432831 | 13" Versi Lite™, Wet Location | 2-75W Incandescent | 2,000 | 28W | 4000K | 80 | 120V | Bronze | 120 |

 Denotes Contractor Select Product

Dimensions

FMML 13
Width: 13" (33.0)
Height: 2-1/2" (6.4)



FMLRL | FMLSL | FMLRDL



Features

- Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more
- Easy-to-install white acrylic diffuser available in 11", 14" and 20"
- High-efficiency LED light engine that reduces power consumption up to 80% compared to incandescent
- Dimmable to 10% on a standard TRIAC dimmer; zero in-rush current
- Designed to provide 70% lumen maintenance for at least 50,000 hours

Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity |
|----------------------|--------------|----------------------------|----------------------|--------|-------------|-------|-----|---------|-----------------|
| FMLRL 11 14830 M4 | 820476883071 | 11" Round LED Flush Mount | 75W Incandescent | 1,100 | 16W | 3000K | 80 | 120V | 120 |
| FMLRL 11 14840 M4 | 753573687405 | 11" Round LED Flush Mount | 75W Incandescent | 1,100 | 16W | 4000K | 80 | 120V | 120 CS |
| FMLRL 14 20830 M4 | 820476883118 | 14" Round LED Flush Mount | 2 - 60W Incandescent | 1,600 | 24W | 3000K | 80 | 120V | 72 CS |
| FMLRL 14 20840 M4 | 753573687412 | 14" Round LED Flush Mount | 2 - 60W Incandescent | 1,600 | 24W | 4000K | 80 | 120V | 72 CS |
| FMLRDL 20IN 35840 M4 | 190887513066 | 20" Round LED Flush Mount | 2- 75W Incandescent | 4,000 | 44W | 4000K | 80 | 120V | 32 |
| FMLSL 11 14830 M4 | 820476883125 | 11" Square LED Flush Mount | 75W Incandescent | 1,100 | 16W | 3000K | 80 | 120V | 120 |
| FMLSL 11 14840 M4 | 753573687436 | 11" Square LED Flush Mount | 75W Incandescent | 1,100 | 16W | 4000K | 80 | 120V | 120 CS |
| FMLSL 14 20830 M4 | 820476883149 | 14" Square LED Flush Mount | 2 - 60W Incandescent | 1,600 | 24W | 3000K | 80 | 120V | 72 |
| FMLSL 14 20840 M4 | 753573687467 | 14" Square LED Flush Mount | 2 - 60W Incandescent | 1,600 | 24W | 4000K | 80 | 120V | 72 |

CS Denotes Contractor Select Product

Accessories

| Catalog Number | UPC | Description |
|----------------|--------------|--|
| DFMLRL11 M4 | 820476158476 | Replacement Acrylic Lens Only for the 11" LED Round |
| DFMLRL14 M4 | 820476158506 | Replacement Acrylic Lens Only for the 14" LED Round |
| DFMLSL11 M4 | 820476158513 | Replacement Acrylic Lens Only for the 11" LED Square |
| DFMLSL14 M4 | 820476158520 | Replacement Acrylic Lens Only for the 14" LED Square |

Dimensions

FMLRL 11 Height: 2-7/8" (7.3)
Width: 11" (27.9)
FMLRL 14 Height: 3-1/8" (7.9)
Width: 13-11/16" (34.7)
FMLRDL 20 Height: 4" (10.2)
Width: 20" (5.8)



FMLSL 11 Height: 2-7/8" (7.3)
Width: 11" (27.9)
FMLSL 14 Height: 3-1/8" (7.9)
Width: 13-11/16" (34.7)



Features

- Ideal for use in kitchens, offices, utility work areas, stairways and other applications where affordable and reliable illumination is desired
- Low-profile, linear fixture with durable white, acrylic diffuser providing widespread, uniform illumination
- High-efficiency LED light engine that reduces power consumption up to 40% compared to incandescent
- Lift-and-shift diffuser allowing easy removal for cleaning with no clips to lose or break
- Designed to provide 70% lumen maintenance for at least 50,000 hours



Ordering Information


| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity |
|----------------|--------------|--|------------------|--------|-------------|-------|-----|---------|-----------------|
| FMLL 9 30840 | 753573658511 | LED Litepuff™ Linear Low-Profile Flush Mount | 2-T8 Fluorescent | 3,200 | 35W | 4000K | 85 | 120V | 36 |

Accessories

| Catalog Number | UPC | Description |
|----------------|--------------|---------------------------------------|
| DFMLL 9 | 753573658474 | Replacement Diffuser for LED LitePuff |

Dimensions

FMLL 9
Width: 9-1/4" (23.5)
Length: 47-7/8" (121.7)



FMLWL



Features

- Ideal for use in kitchens, offices, utility work areas, stairways and many other applications
- This LED narrow wrap is a low-profile, linear fixture with decorative end caps and white, acrylic diffuser for widespread, uniform illumination
- Provides general illumination for surface-mount residential and light commercial applications
- Designed to provide 70% lumen maintenance for at least 50,000 hours



Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity | |
|-----------------------|--------------|-------------------------------|---------------------------|--------|-------------|-------|-----|----------|-----------------|----|
| FMLWL 24 840 | 888791197921 | 2' LED Wrap, Ceiling and Wall | 2 Lamp 17W T8 Fluorescent | 1,400 | 20W | 4000K | 85 | 120V | 224 | CS |
| FMLWL 24 840 ZT MVOLT | 191848384657 | 2' LED Wrap, Ceiling and Wall | 17W T8 Fluorescent | 3,000 | 32W | 4000K | 85 | 120-277V | 224 | |
| FMLWL 48 835 | 888791982343 | 4' LED Wrap, Ceiling and Wall | 32W T8 Fluorescent | 2,900 | 40W | 3500K | 85 | 120V | 112 | |
| FMLWL 48 840 | 888791197969 | 4' LED Wrap, Ceiling and Wall | 2 Lamp 32W T8 Fluorescent | 2,900 | 40W | 4000K | 85 | 120V | 112 | CS |
| FMLWL 48 835 ZT MVOLT | 191848384565 | 4' LED Wrap, Ceiling and Wall | 32W T8 Fluorescent | 4,600 | 48W | 3500K | 85 | 120-277V | 112 | |
| FMLWL 48 840 ZT MVOLT | 191848384558 | 4' LED Wrap, Ceiling and Wall | 32W T8 Fluorescent | 4,600 | 48W | 4000K | 85 | 120-277V | 112 | CS |

CS Denotes Contractor Select Product

Accessories

| Catalog Number | UPC | Description |
|----------------|--------------|---------------------------|
| DFMLWL 24 | 888791448627 | 2' White Acrylic Diffuser |
| DFMLWL 48 | 888791448634 | 4' White Acrylic Diffuser |

Dimensions

| | |
|------------------------|-------------------------|
| 2' | 4' |
| Width: 5-1/2" (14.0) | Width: 5-1/2" (14.0) |
| Length: 24-1/2" (62.2) | Length: 47-2/5" (120.4) |
| Depth: 2-3/5" (6.6) | Depth: 2-3/5" (6.6) |



Features

- Ideal for use in closets, foyers, hallways, laundry rooms, corridors, offices, and utility work areas
- This wide housing LED wrap is perfect for renovation, it easily covers up existing blemishes from older fixtures, while providing even illumination
- A durable polycarbonate lens provides general illumination for surface-mount light commercial and residential applications
- Adjustable Light Output (ALO6) – 4,000 or 5,000 or 6,000 lumens
- Standard 0-10V dimming or triac dimming options
- Designed to provide 85% lumen maintenance at 60,000 hours





Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity |
|------------------------------|--------------|-------------|--------------------------------------|---------------------|-------------|-------|-----|----------|--|
| FML4W 48 5000LM 835 ZT MVOLT | 194994026723 | 4' LED Wrap | 2 or 3 Lamp Fluorescent T8 or T12 | 5,000 | 53.4W | 3500K | 80 | 120-277V | 44 |
| FML4W 48 5000LM 840 ZT MVOLT | 194994026815 | 4' LED Wrap | 2 or 3 Lamp Fluorescent T8 or T12 | 5,000 | 53.4W | 4000K | 80 | 120-277V | 44  |
| FML4W 48 AL06 SEF 835 MVOLT | 194994027058 | 4' LED Wrap | 2, 3 or 4 Lamp Fluorescent T8 or T12 | 4,000, 5,000, 6,000 | 49W | 3500K | 80 | 120-277V | 44 |
| FML4W 48 AL06 SEF 840 MVOLT | 194994027249 | 4' LED Wrap | 2, 3 or 4 Lamp Fluorescent T8 or T12 | 4,000, 5,000, 6,000 | 49W | 4000K | 80 | 120-277V | 44  |
| FML4W 48 5000LM 840 TD | 194994011507 | 4' LED Wrap | 2 or 3 Lamp Fluorescent T8 or T12 | 5,000 | 54W | 4000K | 80 | 120V | 44  |

 Denotes Contractor Select Product

Dimensions

Width: 10" (25.4)
Length: 47-7/8" (121.6)
Depth: 3" (7.62)



FMSATL



Features

- Ideal for use in foyers, corridors, hallways, bedrooms, offices, utility work areas, stairways and many other light commercial or residential settings
- Available in 13" and 16" diameter sizes in both brushed nickel and bronze finishes
- Designed to provide 70% lumen maintenance for at least 50,000 hours
- High-efficiency LED light engine that reduces power consumption by up to 84% compared to incandescent

Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity |
|-----------------------|--------------|-----------------------------------|----------------------|--------|-------------|-------|-----|---------|-----------------|
| FMSATL 13 14830 BN M4 | 820476253249 | Saturn 13" LED Flush Mount, Round | 2 - 60W Incandescent | 1,000 | 16W | 3000K | 83 | 120V | 72 |
| FMSATL 13 14840 BN M4 | 820476054594 | Saturn 13" LED Flush Mount, Round | 2 - 60W Incandescent | 1,000 | 16W | 4000K | 86 | 120V | 72 |
| FMSATL 16 20830 BN M4 | 820476253263 | Saturn 16" LED Flush Mount, Round | 2 - 75W Incandescent | 1,600 | 24W | 3000K | 83 | 120V | 32 |
| FMSATL 16 20840 BN M4 | 820476154324 | Saturn 16" LED Flush Mount, Round | 2 - 75W Incandescent | 1,600 | 24W | 4000K | 80 | 120V | 32 |


Accessories

| Catalog Number | UPC | Description |
|----------------|--------------|--|
| 3SHL6 BN M6 | 820476846670 | 6" Stem Hanger in Brushed Nickel |
| CAHL6 BN M10 | 888791396119 | 6" Canopy Hanger in Brushed Nickel |
| DSATL 13 M4 | 820476846663 | Replacement Lens/Diffuser for Saturn 13" |

Dimensions

| Nominal size | Model number | Mounting configuration | (A) Width inches (cm) | (B) Depth inches (cm) |
|--------------|--------------|------------------------|-----------------------|-------------------------------|
| 13" dia | FMSATL 13 | Flush Semi-flush* | 12-9/16 (31.9) | 3-1/8" (7.9) 8-3/8" (21.3) |
| 16" dia | FMSATL 16 | Flush Semi-flush* | 16 (40.6) | 3-5/8" (9.2) 9-5/8" (24.5) |

*Requires 3-stem hanger kit. See Accessories/Replacement parts below.

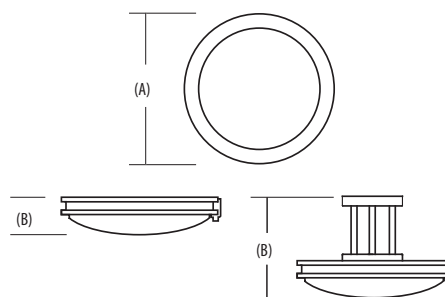

Features

- Ideal for bedroom or utility closets, pantries, laundry rooms or any location needing energy-efficient lighting
- Can be mounted to either the wall or ceiling; hardware included for mounting to standard round, octagon or horizontal rectangle junction box
- Includes 4 1/4" x 4 1/2" mounting plate (with 18" and 24" models) that can be rotated to accommodate vertical junction box
- Features a white acrylic diffuser with either a pull chain (S1) or passive infrared (PIR) sensor for easy On/Off operation
- Designed to provide 70% lumen maintenance for at least 50,000 hours
- Uses high-efficiency LED light engine that reduces power consumption by up to 80% compared to incandescent




Ordering Information


| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Pallet Quantity |
|---------------------|--------------|------------------------------|------------------|--------|-------------|-------|-----|---------|-----------------|
| FMMCL 840 PIR M4 | 745971128925 | 7" Closet Light, PIR Sensor | 60W Incandescent | 575 | 10W | 4000K | 85 | 120V | 840 |
| FMMCL 840 S1 M4 | 820476778513 | 7" Closet Light, Pull Chain | 60W Incandescent | 575 | 10W | 4000K | 85 | 120V | 840 |
| FMMCL 18 840 PIR M4 | 888791964974 | 18" Closet Light, PIR Sensor | 75W Incandescent | 925 | 14W | 4000K | 85 | 120V | 384 |
| FMMCL 18 840 S1 M4 | 888791964912 | 18" Closet Light, Pull Chain | 75W Incandescent | 925 | 14W | 4000K | 85 | 120V | 384 |
| FMMCL 24 840 PIR M4 | 888791965001 | 24" Closet Light, PIR Sensor | 90W Incandescent | 1,225 | 17W | 4000K | 85 | 120V | 192 |
| FMMCL 24 840 S1 M4 | 888791964943 | 24" Closet Light, Pull Chain | 90W Incandescent | 1,225 | 17W | 4000K | 85 | 120V | 192 |

Dimensions


7"
Height: 4-1/4" (10.8)
Width: 6-5/8" (16.8)
Depth: 1-5/8" (4.1)



18"
Height: 3-1/4" (8.2)*
Width: 17-6/8" (45)
Depth: 1-3/8" (3.6)
*Mounting plate extends height to 4 1/4"



24"
Height: 3-1/4" (8.2)*
Width: 23-5/8" (60)
Depth: 1-3/8" (3.6)
*Mounting plate extends height to 4 1/4"

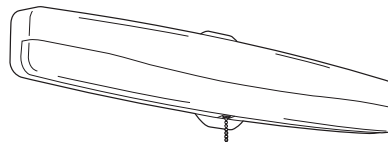

FMVCCLS | FMVCSLS | FMVTRL | FMVTSL



Features

- Ideal for general or task lighting for residential and light commercial applications
- Acrylic diffuser with housings available in a brushed nickel finish
- Long-life LEDs, coupled with a multivolt driver, to provide extended service life
- Traditional and contemporary styles with a round or square diffuser
- Contemporary styles use a switch to adjust color temperature during installation (3000K, 3500K or 4000K) and are dimmable by either triac or 0-10V dimming
- Contemporary versions available that can be used to comply with Title 24, JA8 high efficacy light source requirements




Ordering Information


| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Finish | Pallet Quantity |
|--|--------------|---|------------------------|-------------|-------------|-------------------|-----|-----------|----------------|-----------------|
| FMVCCLS 24IN MVOLT 30K35K40K 90CRI BN M6 | 191848780770 | Contemporary 24" LED Vanity, Cylinder with Switchable White | 2 - 17W T5 Fluorescent | 1,690-1,850 | 27W | 3000K/3500K/4000K | 90 | 120V-277V | Brushed Nickel | 48 |
| FMVCSLS 24IN MVOLT 30K35K40K 90CRI BN M6 | 191848792117 | Contemporary 24" LED Vanity, Square with Switchable White | 2 - 17W T5 Fluorescent | 1,550-1,740 | 27W | 3000K/3500K/4000K | 90 | 120V-277V | Brushed Nickel | 48 |
| FMVTRL 24IN MVOLT 30K 90CRI BN M4 | 889804269529 | Traditional 24" LED Vanity, Round | 2 - 17W T5 Fluorescent | 1,300 | 17W | 3000K | 94 | 120V-277V | Brushed Nickel | 48 |
| FMVTSL 24IN MVOLT 30K 90CRI BN M4 | 889804269628 | Traditional 24" LED Vanity, Square | 2 - 17W T5 Fluorescent | 1,300 | 17W | 3000K | 94 | 120V-277V | Brushed Nickel | 48 |

Dimensions


FMVCCLS 24
Length: 22-3/8" (568)

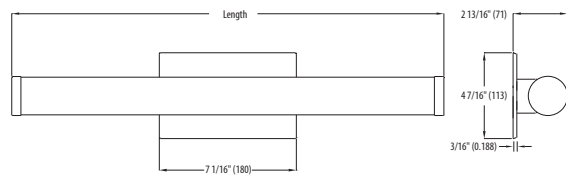


FMVCSLS 24
Length: 21-7/16" (545)

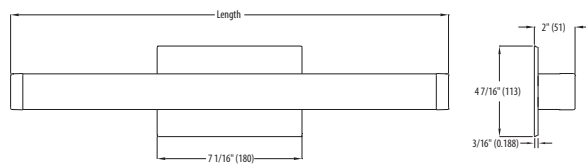

FMVTRL 24
Length: 23-7/16" (595)

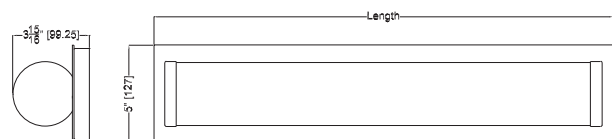

FMVTSL 24
Length: 23-7/16" (595)

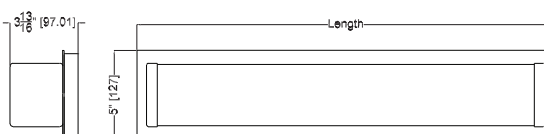


Certain airborne contaminants can diminish integrity of acrylic. See page 174 for Acrylic Compatibility table for suitable uses.





Features

- Ideal for task or accent lighting in residential and light commercial applications
- Designed to provide 70% lumen maintenance for at least 50,000 hours
- White lens provides even illumination on surfaces where tasks are performed
- Includes mounting chains and S-hooks
- DPSL includes 5A Max convenience outlet to link up to 10 fixtures

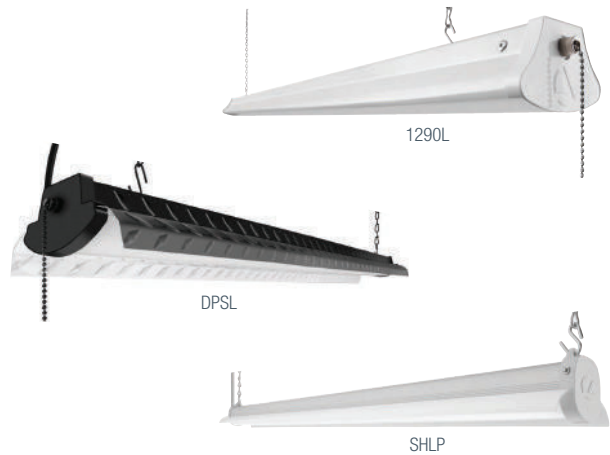

Ordering Information


| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Energy Star | Pallet Quantity |
|-----------------------------|--------------|---|--------------------|--------|-------------|-------|-----|---------|-------------|-----------------|
| 1290L NST | 190887737868 | LED Shoplight, 5' White Cord/Plug | 2 - T8 Fluorescent | 3,100 | 28W | 4000K | 83 | 120V | Yes | 165 |
| DPSL 48IN 40K 80CRI BL | 190887562651 | LED Linkable Diamond Plate Shoplight Black | 3 - T8 Fluorescent | 4,000 | 40W | 4000K | 80 | 120V | Yes | 96 |
| DPSL 48IN 40K 80CRI CHR | 190887562644 | LED Linkable Diamond Plate Shoplight Chrome | 3 - T8 Fluorescent | 4,000 | 40W | 4000K | 80 | 120V | Yes | 96 |
| SHLP 36IN 40K 80CRI DNA M12 | 190887632729 | 36" LED Shoplight | 2 - T8 Fluorescent | 3,000 | 34W | 4000K | 80 | 120V | Yes | 144 |
| SHLP 48IN 40K 80CRI DNA M12 | 190887632743 | 48" LED Shoplight | 2 - T8 Fluorescent | 3,200 | 36W | 4000K | 80 | 120V | Yes | 96 |

CS Denotes Contractor Select Product

Dimensions


1290L

Length: 46-5/8" (118.3)
Width: 3-3/4" (9.6)
Height: 2-3/8" (6.0)




DPSL

Length: 46-1/2" (118.1)
Width: 5-1/2" (13.97)
Height: 2-1/2" (6.35)

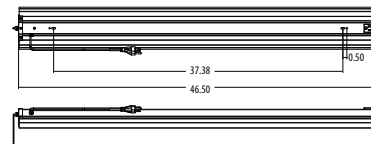

SHLP

Length: 33-5/8" (85.4) or 45-1/2" (115.4)
Width: 2-1/3" (6.0)
Height: 2" (5.0)

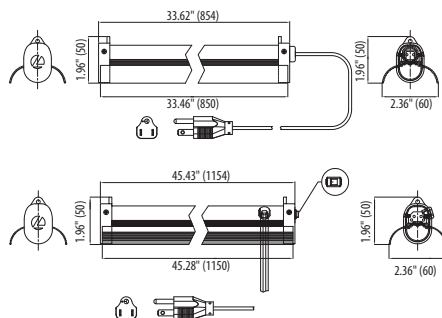

SGLL



Features

- Ideal for use in garages, corridors, utility areas, workshops and more
- White high-gloss polycarbonate diffuser with passive infrared (PIR) motion sensor for easy on/off operation
- Easy installation for flush mounting to ceiling or suspended mounting with aircraft cables (included)
- Easily link multiple fixtures together using the end-to-end connector for simultaneous, instant-on lighting in larger spaces



Ordering Information

| Catalog Number | UPC | Description | Replaces Up To | Lumens | Input Watts | CCT | CRI | Voltage | Energy Star | Pallet Quantity |
|--------------------------|--------------|----------------------|----------------------|--------|-------------|-------|-----|---------|-------------|-----------------|
| SGLL 24 40K 80CRI PIR M4 | 889804469868 | 24" LED Garage Light | 2-32W T8 Fluorescent | 5,000 | 80W | 4000K | 80 | 120V | Yes | 48 |

Dimensions

