

D16, D27, D33, D125 DIN Type D Diazed fuses

DIN style Type D ceramic body low voltage fuses.

Ratings

- Volts 500 Vac
- Amps 2-100 A
- IR 50 kA

Agency information

- IEC 60269 and DIN 49515, CE




| Catalog no. | Amps | "D" dimension | Color code | Fig. |
|-------------|------|---------------|------------|------|
| 2D16 | 2 | 6 | Pink | 1 |
| 4D16 | 4 | 6 | Brown | |
| 6D16 | 6 | 6 | Green | |
| 10D16 | 10 | 8 | Red | |
| 16D16 | 16 | 10 | Grey | |
| 20D16 | 20 | 12 | Blue | 2 |
| 25D16 | 25 | 14 | Yellow | |
| 2D27 | 2 | 6 | Pink | |
| 4D27 | 4 | 6 | Brown | |
| 6D27 | 6 | 6 | Green | |
| 10D27 | 10 | 8 | Red | 3 |
| 16D27 | 16 | 10 | Grey | |
| 20D27 | 20 | 12 | Blue | |
| 25D27 | 25 | 14 | Yellow | |
| 35D33 | 35 | 16 | Black | |
| 50D33 | 50 | 18 | White | 4 |
| 63D33 | 63 | 20 | Copper | |
| 80D125 | 80 | 5 | Silver | |
| 100D125 | 100 | 7 | Red | |

Additional 500 V quick acting fuses in body sizes D16, D27, D33 and D125 rated 2-100 A. Reference number suffixed "Q." E.g., 10D27**Q**.

Gauge rings and keys can also be supplied.

Dimensions — mm

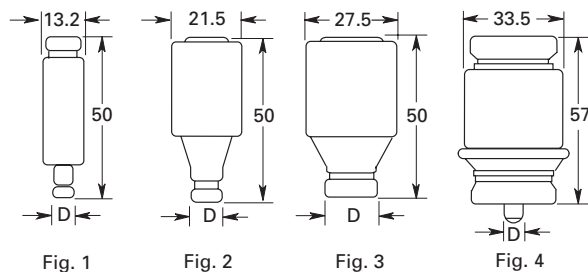

NZ01, NZ02 DIN Type N Neozed fuses

DIN style Type N ceramic body low voltage.

Ratings

- Volts 400 Vac
- Amps 2-63 A
- IR 50 kA

Agency information

- IEC 60269 and DIN 49515, CE



| Catalog no. | Amps | "D" dimension | Color code |
|-------------|------|---------------|------------|
| 2NZ01 | 2 | 11 | Pink |
| 4NZ01 | 4 | 11 | Brown |
| 6NZ01 | 6 | 11 | Green |
| 10NZ01 | 10 | 11 | Red |
| 16NZ01 | 16 | 11 | Grey |
| 20NZ02 | 20 | 15 | Blue |
| 25NZ02 | 25 | 15 | Yellow |
| 35NZ02 | 35 | 15 | Black |
| 50NZ02 | 50 | 15 | White |
| 63NZ02 | 63 | 15 | Copper |

Dimensions — mm

