


Hy-PRO[®] 115 Series

Ball Valves to DIN Standard

Catalog No. H-115BV
Jul. 2000

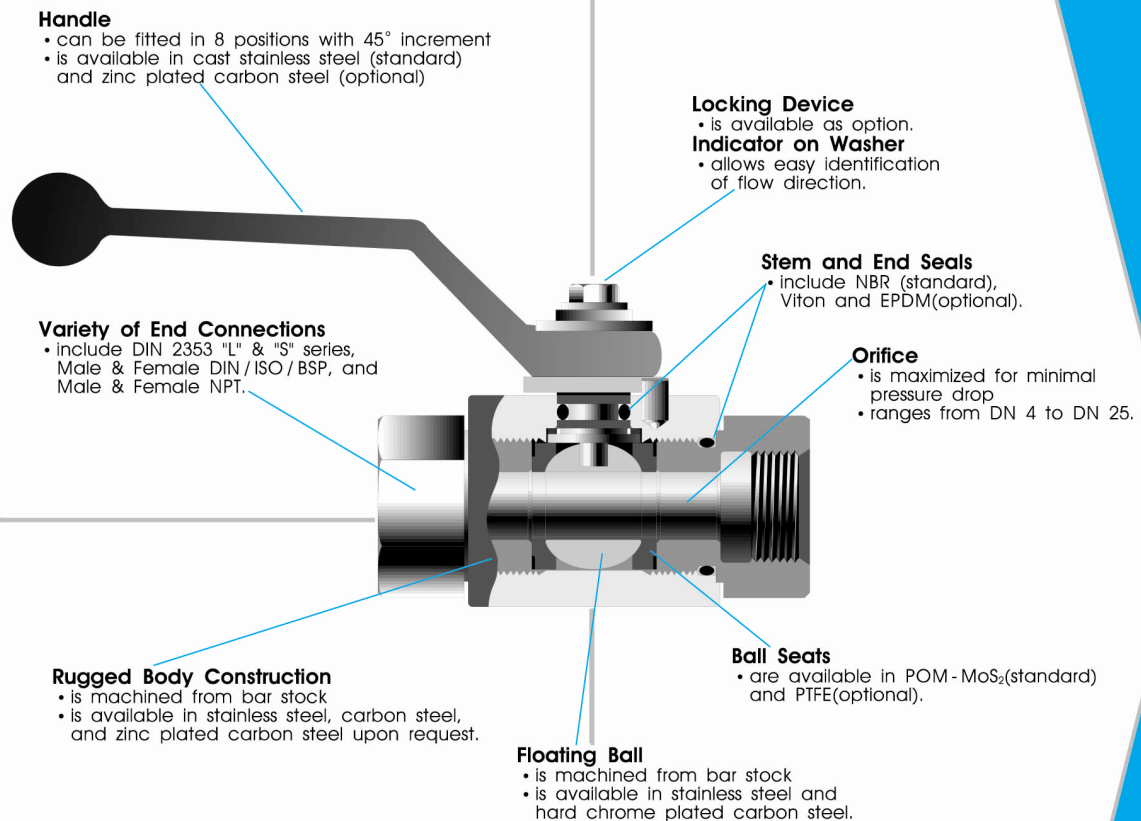

Features

- **Pressure rating** up to 500bar @ 21°C
- **Temperature rating** from -20°C to 100°C
- **Conforms to** DIN standard
- **Compact design** with max orifice
- **100% factory tested.**



하이록코리아주식회사
HY-LOK CORPORATION

Tables of Dimensions

DIN 2353 Light Series Tube (L)

Basic Part No.	Tube O.D.	DN ⁽¹⁾	PB ⁽²⁾	B	H	h	h _i	L	I	I _i	R	Thread T	Weight (kg)
BVDT - 6L	6	4	315	26	33	13.5	83	67	40	10	115	M12 × 1.5	0.4
BVDT - 8L	8	6	315	26	33	13.5	83	67	40	10	115	M14 × 1.5	0.4
BVDT - 10L	10	6	315	26	33	13.5	83	74	40	11	115	M16 × 1.5	0.5
BVDT - 12L	12	10	315	32	38	17.5	88.5	74	43	11	115	M18 × 1.5	0.6
BVDT - 15L	15	13	315	35	40	19	90	82	48	12	115	M22 × 1.5	0.7
BVDT - 18L	18	13	315	35	40	19	90	82	48	12	115	M26 × 1.5	0.8
BVDT - 22L	22	20	160	49	57	24.5	113	101	62	14	159	M30 × 2.0	2.1
BVDT - 28L	28	25	160	58	65	29.5	121	108	66.2	14	159	M36 × 2.0	2.3
BVDT - 35L	35	25	160	58	65	29.5	121	112	66.2	16	159	M45 × 2.0	2.3

DIN 2353 Heavy Series Tube (S)

Basic Part No.	Tube O.D.	DN ⁽¹⁾	PB ⁽²⁾	B	H	h	h _i	L	I	I _i	R	Thread T	Weight (kg)
BVDT - 8S	8	4	500	26	33	13.5	83	73	40	12	115	M16 × 1.5	0.4
BVDT - 10S	10	6	500	26	33	13.5	83	73	40	12	115	M18 × 1.5	0.4
BVDT - 12S	12	6	500	32	38	17.5	88.5	76	43	12	115	M20 × 1.5	0.5
BVDT - 14S	14	10	500	32	38	17.5	88.5	80	43	14	115	M22 × 1.5	0.6
BVDT - 16S	16	13	400	35	40	19	90	86	48	14	115	M24 × 1.5	0.7
BVDT - 20S	20	13	400	35	40	19	90	90	48	16	115	M30 × 2.0	0.8
BVDT - 25S	25	20	315	49	57	24.5	113	109	62	18	159	M36 × 2.0	2.1
BVDT - 30S	30	25	315	58	65	29.5	121	120	66.2	20	159	M42 × 2.0	2.3
BVDT - 38S	38	25	315	58	65	29.5	121	124	66.2	22	159	M52 × 2.0	2.3

Female DIN / ISO 228 / BSP



Basic Part No.	DN ⁽¹⁾	PB ⁽²⁾	B	H	h	h _i	L	I	I _i	R	Thread T	Weight (kg)
BVDF - 2G	6	500	26	33	13.5	83	68.8	40	10	115	PF 1/8"	0.4
BVDF - 4G	6	500	26	33	13.5	83	68.8	40	14	115	PF 1/4"	0.4
BVDF - 6G	10	500	32	38	17.5	88.5	71.9	43	14	115	PF 3/8"	0.6
BVDF - 8G	13	500	35	40	19	90	82.3	48	16.5	115	PF 1/2"	0.7
BVDF - 12G	20	315	49	57	24.5	113	95.4	62	18	159	PF 3/4"	1.6
BVDF - 16G	25	315	58	65	29.5	121	112.7	66.2	20	159	PF 1"	2.3
BVDF - 20G	25	315	58	65	29.5	121	120	66.2	22	159	PF 1 1/4"	2.3

Female NPT (ANSI / ASME B1.20.1)


Basic Part No.	DN ⁽¹⁾	PB ⁽²⁾	B	H	h	h _i	L	I	I _i	R	Thread T	Weight (kg)
BVDF - 4N	6	500	26	33	13.5	83	68.8	40	15	115	NPT 1/4"	0.4
BVDF - 6N	10	500	32	38	17.5	88.5	78	43	15	115	NPT 3/8"	0.6
BVDF - 8N	13	500	35	40	19	90	104	48	20.5	115	NPT 1/2"	0.7
BVDF - 12N	20	315	49	57	24.5	113	102	62	21.5	159	NPT 3/4"	1.6
BVDF - 16N	25	315	58	65	29.5	121	119	66.2	25.4	159	NPT 1"	2.3
BVDF - 20N	25	315	58	65	29.5	121	130	66.2	25.4	159	NPT 1 1/4"	2.3

Note : (1) DN is the max orifice.
(2) PB in Bar with a safety factor of 1.5.


All dimensions are in millimeters.
Tube connections complete with sleeves and nuts.

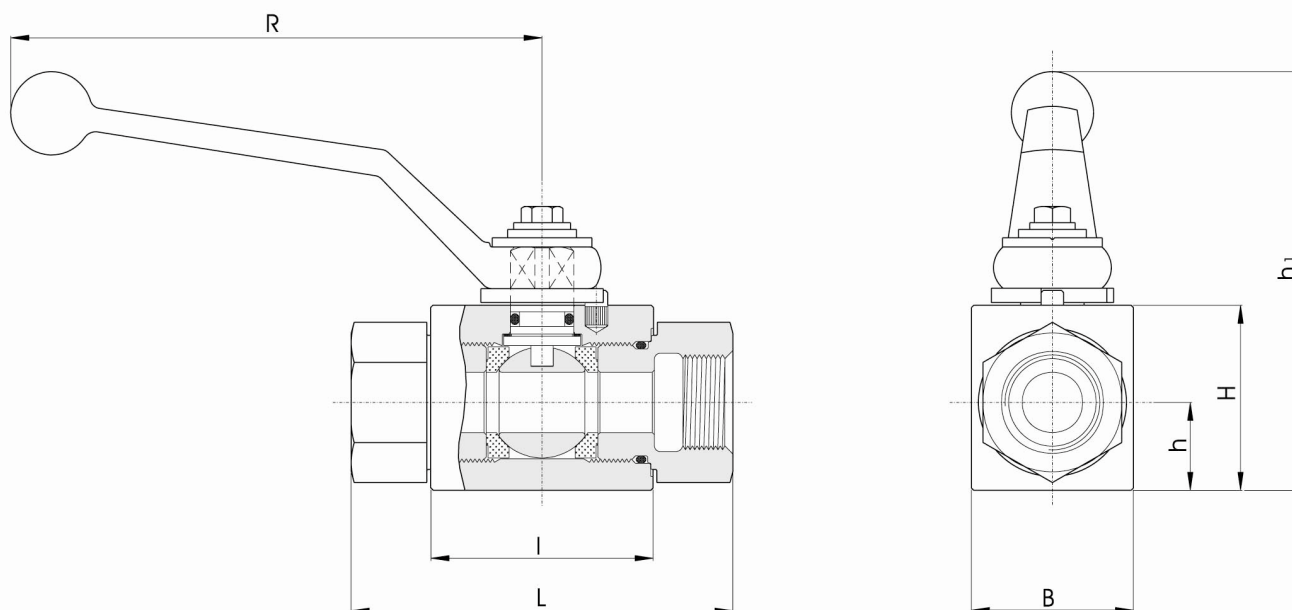


Tube Connection
DIN 2353
Light Series(L)



Tube Connection
DIN 2353
Heavy Series(S)



Female Thread
BSP
DIN / ISO 228 / BSP



Female Thread
NPT
, ASME / ANSI B1.20.1

Technical Data

Materials of Construction

Description	Specification / Grade			
	Valve Body Materials			
	SS316		Carbon Steel	
	ASTM	DIN	ASTM	DIN
Body	A479 / SS316	17440 / 1.4571	A108 / 12L14	1651 / 9SMn28K
End Connector				
Stem				
Ball	316 Stainless Steel			
Ball Seats *	POM - MoS ₂ (Standard)			
Stem & End Seals *	NBR (Standard)			
Handle	SS316		Carbon Steel	
Locking Device	Stainless Steel			

Note : "*"marked are wetted parts. Lubricant is silicone based.

Temperature Rating

Seals

Materials	Temperature Rating
NBR(Buna N)	-23 °C to 121 °C
Viton	-23 °C to 200 °C
EPDM	-46 °C to 149 °C

Ball Seats

Materials	Temperature Rating
POM - MoS ₂	-30 °C to 100 °C
PTFE	-54 °C to 65 °C

General Information

Applications

- Hydraulic fluids, compressed air, lubricants, and fuel oil systems


Sour Gas Service

- is provided to meet NACE Standard MR-01-75.

Testing

- Each valve is tested with nitrogen @ 1000psig(69bar) to max leak rate of 0.1SCCM.
- Hydrostatic shell test is performed at 1.5 times the working pressure.
- Optional tests are available upon request.

Ordering Information

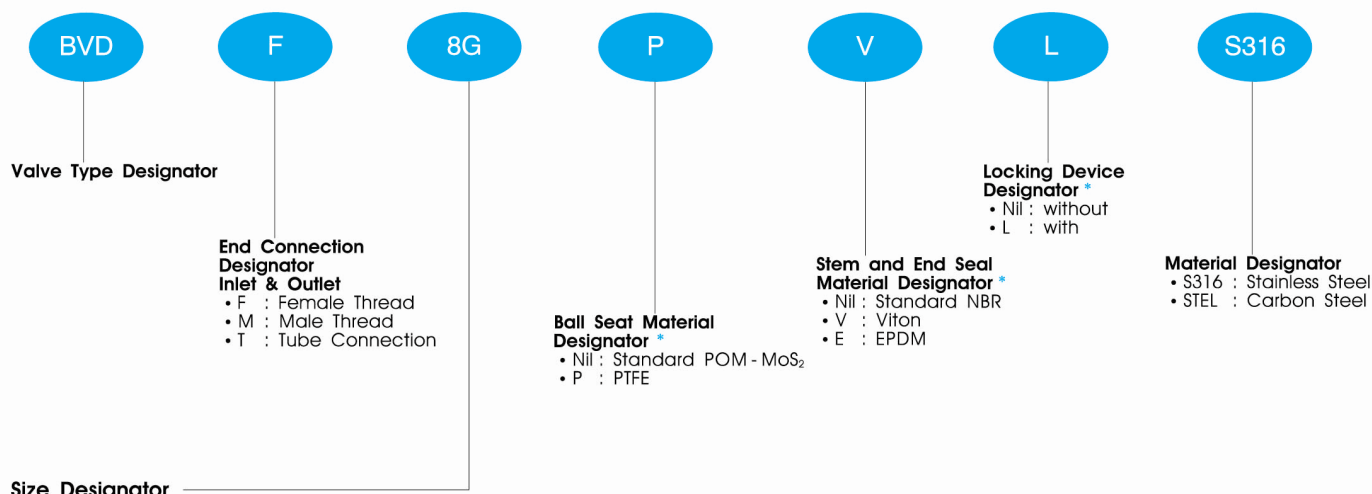

Size Designator

- DIN 2353 Light Series Tube (L)

Tube O.D.(mm)	6	8	10	12	15	18	22	28	35	42
Designator	6L	8L	10L	12L	15L	18L	22L	28L	35L	42L

- DIN 2353 Heavy Series Tube (S)

Tube O.D.(mm)	6	8	10	12	14	16	20	25	30	38
Designator	6S	8S	10S	12S	14S	16S	20S	25S	30S	38S

- Female DIN / ISO 228 / BSP

Thread(in.)	1/8	1/4	3/8	1/2	3/4	1	1 1/4
Designator	2G	4G	6G	8G	12G	16G	20G

- Female NPT (ANSI / ASME B1.20.1)

Thread(in.)	1/8	1/4	3/8	1/2	3/4	1	1 1/4
Designator	2N	4N	6N	8N	12N	16N	20N

Note *: No designator is required for standard, BVDF-8G-S316.

SAFETY in VALVE SELECTION

For proper, safe, trouble-free installation, operation and maintenance of fluid systems, material compatibility, pressure/temperature ratings, and application details must be considered in the selection of valve. Improper selection or employment of products described in this catalogue can cause personal injury or property losses. It is the responsibility of system designer and user to select and use the products for their specific applications.

QUALITY SYSTEM CERTIFICATES



ISO 9001
CERTIFICATE NO.GQC 212

ASME SECT III (MO)
CERTIFICATE NO. QSC 584



DET NORSKE VERITAS
CERTIFICATE NO.P-10432



Distributed by :

HY-LOK CORPORATION

567, Sinpyung-Dong, Saha-gu,
Busan, Korea 604-839
http : //www.hy-lok.com