



Computer Networks

DS360

Project-Phase 1

Deadline: Day 26/07/2026 @ 23:59

[Total Mark is 5] **CRN:50584**

Name: Layan Alghamdi

ID: S240014014

Name: Alanoud Alfalah

ID: S240061825

Name: Rawan Almalki

ID: S240051772

Name: Safanah Alfahaid

ID: S240031066

Instructions:

- You must submit two separate copies (**one Word file and one PDF file**) using the Assignment Template on Blackboard via the allocated folder. These files **must not be in compressed format**.
- It is your responsibility to check and make sure that you have uploaded both the correct files.
- Zero mark will be given if you try to bypass the SafeAssign (e.g., misspell words, remove spaces between words, hide characters, use different character sets, **convert text into image** or languages other than English or any kind of manipulation).
- Email submission will not be accepted.
- You are advised to make your work clear and well-presented. This includes filling your information on the cover page.
- You must use this template, failing which will result in zero mark.
- You **MUST** show all your work, and text must not be converted into an image, unless specified otherwise by the question.
- Late submission will result in ZERO mark.
- The work should be your own, copying from students or other resources will result in ZERO mark.
- Use **Times New Roman** font for all your answers.

Project Instruction

Project Objective:

Design, configure, and test a network setup in **Packet Tracer** to successfully transmit data packets between devices in different LANs across two separate WANs (WAN 1 and WAN 2).

Group Details

- Group Size = Maximum of 3 Members.
- One group member (group leader/coordinator) must **submit the project report** on blackboard. Marks will be given based on your submission and quality of the contents.

Project Report

- The project is divided into two phases:
 - Phase 1 (Mid project Progress Report)
 - Phase 2 (Final project Report)
- This report is for Phase 1. In this report, you should complete all the requirements for Phase 1 only.
- Each Report will be evaluated according to the marking criteria

Learning Outcome(s): Demonstrate protocol configuration, network-addressing schemes and analyze packet transmission for the Local and Wide Area Networks.

Project Description (Common to Phase 1 and Phase 2)

A university operates two campuses: a Main Campus and a Branch Campus. Each campus network is treated as a separate WAN site. Your task is to design and configure, in Cisco Packet Tracer, a network that successfully transmits data packets from a device in any LAN of WAN 1 (Main Campus) to a device in any LAN of WAN 2 (Branch Campus). Each WAN contains 2 LANs, and each LAN has 3 end devices.

Network Design Requirements:

1. WAN 1 (Main Campus):

- Contains LAN 1 (Computer Lab) and LAN 2 (Admin Office).
- Each LAN has 3 devices (PCs or laptops) connected through a switch.
- Assign private IP addresses to the devices in each LAN (e.g., use 172.16.10.0/24 for LAN 1 and 172.16.20.0/24 for LAN 2).
- Connect each LAN to a router (Router 1).

2. WAN 2 (Branch Campus):

- Contains LAN 3 (Library) and LAN 4 (Faculty Office).
- Each LAN has 3 devices (PCs or laptops) connected through a switch.
- Assign private IP addresses to the devices in each LAN (e.g., use 172.16.30.0/24 for LAN 3 and 172.16.40.0/24 for LAN 4).
- Connect each LAN to a router (Router 2).

3. WAN Connection:

- Connect Router 1 and Router 2 using a serial link to simulate a WAN connection.
- Assign IP addresses to the serial interfaces (e.g., 10.10.10.1/30 for Router 1 and 10.10.10.2/30 for Router 2).

Configuration Details:

1. Assign IP Addresses:

- Configure IP addresses, subnet masks, and default gateways for all devices in each LAN. Example:
 - LAN 1: 172.16.10.0/24, Default Gateway: 172.16.10.1 (Router 1's interface).

- LAN 2: 172.16.20.0/24, Default Gateway: 172.16.20.1 (Router 1's interface).
- LAN 3: 172.16.30.0/24, Default Gateway: 172.16.30.1 (Router 2's interface).
- LAN 4: 172.16.40.0/24, Default Gateway: 172.16.40.1 (Router 2's interface).

2. Router Configuration:

- Configure IP addresses on the LAN and WAN interfaces of both routers.
Example:

- Router 1:
 - LAN 1 Interface: 172.16.10.1/24
 - LAN 2 Interface: 172.16.20.1/24
 - WAN Interface (Serial): 10.10.10.1/30
- Router 2:
 - LAN 3 Interface: 172.16.30.1/24
 - LAN 4 Interface: 172.16.40.1/24
 - WAN Interface (Serial): 10.10.10.2/30

3. Enable Routing:

- Configure static routes or a dynamic routing protocol (e.g., RIP) on both routers to ensure communication between WAN 1 and WAN 2.
-

Phase 1 Requirements

Students are required to submit a short mid progress report, which must include the following:

1. **Work completed this period (2 marks):** This includes the installation of Cisco Packet Tracer, and a study of Packet Tracer for creating nodes, using different types of links (copper straight-through, copper cross-over, serial DCE/DTE), and assigning IP addresses.
Note: You must show a screenshot of the installation of Packet Tracer (with your system visible, e.g., date/time or username). (1 mark)
Give a description of the objectives and advantages of using Packet Tracer for this project. (1 mark)
 2. **One key decision made during this period (1 mark):** For example, your choice of IP addressing scheme, choice of routing method to study, or division of work among group members. Explain briefly why the decision was made.
 3. **One problem encountered (1 mark):** Describe one genuine problem faced so far (technical or organizational) and its current status (resolved / in progress).
 4. **Plan for the next period (0.5 mark):** Briefly list the tasks you plan to complete before the final submission (e.g., building the topology, configuring routers, testing with ping).
 5. **Each group member's input/participation (0.5 mark):** State each member's name and their specific contribution during this period.
-

Version History / Commit Log Requirements (Common to Both Reports)

Students must document and submit their project history/timestamps using a live, editable link:

- **Written report:** Submit a shared Google Doc or Word Online link (sharing set to "Anyone with the link can view") along with your final PDF report. The link must show the progress of the students' work with timestamps/screenshots.
- **Code/data/configuration files:** Submit Packet Tracer files (.pkt) and any configuration scripts via a GitHub or GitLab repository link (the coordinator may choose a repository suitable for the course). The repository must show a commit history reflecting incremental progress. Commit regularly (at minimum once per week), with clear, descriptive commit messages.

A separate section in the report must be added and named "Project Artifacts" to include all links, for example:

Live report document (with edit history): [link]

GitHub/GitLab repository (with commit history): [link]

Packet Tracer project file (.pkt): [link or attached]


What NOT to do: Students must not write their report elsewhere and paste the final version in at the last minute. They also must not make a single commit containing the entire project. Both are treated as red flags regardless of the quality of the final work.

Important Notes

- **AI use:** Students may use AI tools (ChatGPT, Claude, Copilot, Gemini, etc.) only for brainstorming approaches, debugging small errors, or proofreading text. AI must not be used to generate analysis, write configuration logic, or produce substantial portions of the report or project files. Any permitted AI use must be disclosed in the Reflection section. Undisclosed AI use, or AI use beyond this scope (disclosed or not), will result in a zero grade for the entire project.
- Any submission lacking a valid, inspectable version/commit history, or showing evidence of AI generation or plagiarism, will receive a zero grade for the entire project.
- Failure to submit the mid progress report as required, or submission of reports found to be fabricated, copied, or AI-generated, will result in a zero grade for the entire project.
- The mid progress report should be concise including screenshots.
- The same shared document link and repository submitted in Phase 1 must continue to be used for Phase 2, so that the full project history is visible in one place.

Cisco Packet Tracer Installation

Screenshot of Cisco Packet Tracer Installation

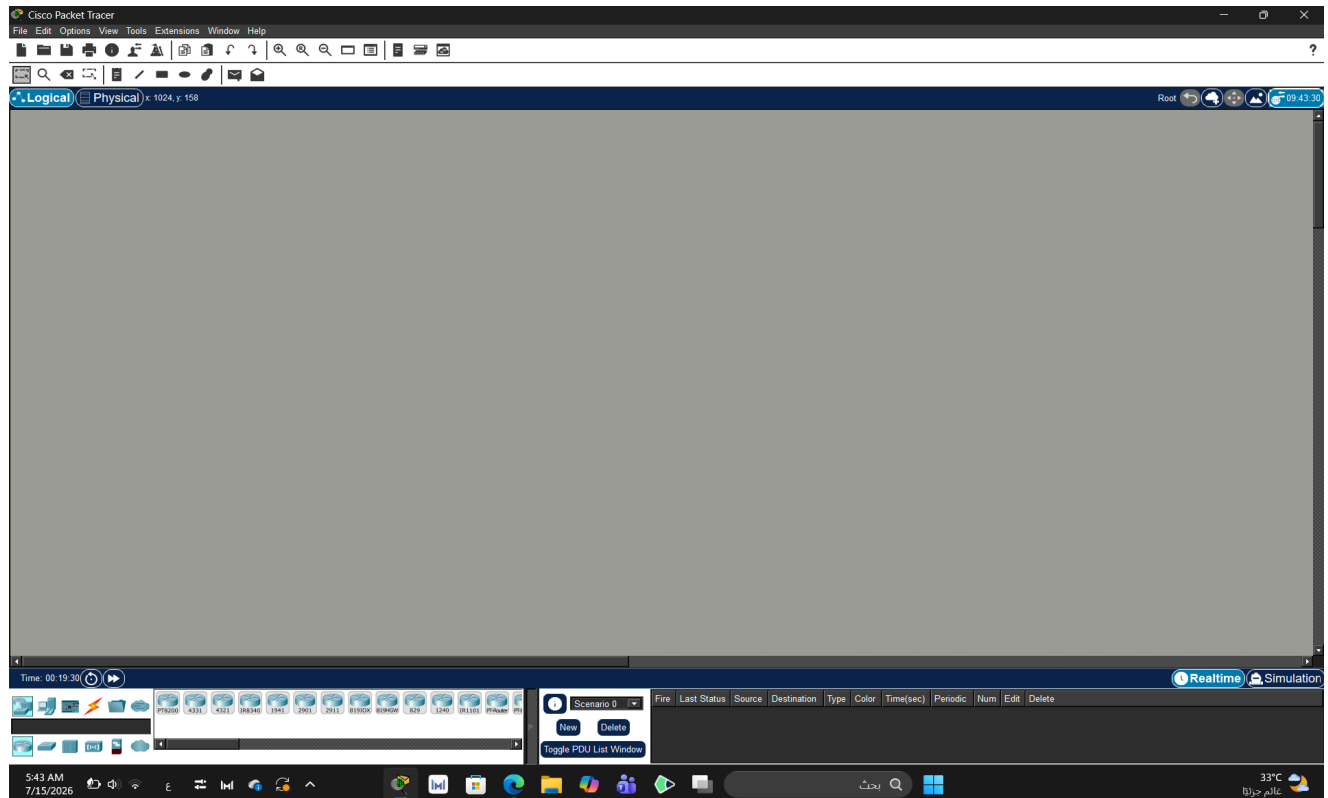

Objectives of Using Cisco Packet Tracer:

- Using a virtual environment to understand networking concepts and try creating different designs virtually.
- Understanding how network devices work, how to configure them, and how to connect them with each other.
- Applying and analyzing network performance and practicing solving problems before implementing them on the required devices.
- Gaining experience and developing skills in designing networks suitable for the project requirements.

Advantages of Using Cisco Packet Tracer in the Project:

- It provides an educational tool to experiment with network configurations without the need for real equipment.
- It makes the process of designing and modifying network layouts easier, and allows us to test changes on them.
- It helps in understanding the communication method between devices and how they interact with each other.
- It saves time and effort because it reduces errors before implementing the network design.

One Key Decision Made

- **Decision:** We chose to use the IP addressing scheme provided in the project instructions (172.16.10.0/24, 172.16.20.0/24, 172.16.30.0/24, and 172.16.40.0/24).
- **Reason:** This makes it easy to set up the network, as each LAN has its own subnet. It helps avoid addressing errors and makes router configuration and troubleshooting easier later.

A Problem Encountered

- **Problem:** At first, we didn't know which type of cable should be used for each connection in Packet Tracer, especially the Serial DCE/DTE cable between the two routers.
- **Status:** Resolved. We read the Packet Tracer documentation and the course materials to figure out which cable to use for each connection and continue with the project.

Plan for the Next Period

1. Prototype the network topology on paper.
2. Build the network topology in Cisco Packet Tracer.
3. Use the correct cables to connect the devices.
4. Assign IP addresses and configure the routers.
5. Test the network in Cisco Packet Tracer.
6. Configure routing between the two WANs.
7. Test network connectivity using the ping command.
8. Troubleshoot and fix any connectivity issues before the final submission.

Each Group Member Input/Participation

Student	Assigned Tasks	Expected Deliverables
Layan Alghamdi	Install Cisco Packet Tracer . Take the required screenshot showing the date or username. Write the objectives of using Packet Tracer. Explain the advantages of using it in the project.	Packet Tracer installation screenshot. A short paragraph about the objectives. A short paragraph about the advantages.
Alanoud Alfalah	Review the project requirements. Write One Key Decision Made , such as selecting the IP addressing plan or the method of dividing the work, and explain the reason for the decision. Write One Problem Encountered and clarify whether it has been solved or is still in progress.	Description of the key decision and its justification. Description of the problem encountered. Current status of the problem and the solution used or proposed.
Rawan Almalki	Write the Plan for the Next Period . Create the initial Packet Tracer file in .pkt format. Build the basic network topology, including Router 1, Router 2, switches, end devices, and cable connections.	A clear plan for the next project period. Packet Tracer file in .pkt format. An initial network topology with all required devices and connections.
Safanah Alfahaid	Prepare the Each Group Member's Input/Participation table and describe each student's contribution. Create a shared file using Google Docs or Word Online and share it with the group. Create a GitHub or GitLab repository and add the first commit.	Completed participation table. Link to the shared online document. Repository link and evidence of the first commit.

Project Artifacts

Google Doc: [IT351_Project-Phase 1](#)

GitHub/GitLab repository: [GitHub](#)

Packet Tracer project file (.pkt): [Network Initial Design](#)

Computer Networks

IT351

Project-Phase 2

Deadline: Day 09/08/2026 @ 23:59

[Total Mark is 15]

Student Details:

CRN:

Name: Layan Alghamdi
Name: Alanoud Alfalah
Name: Rawan Almalki
Name: Safanah Alfehaid

ID: S240014014
ID: S240061825
ID: S240051772
ID: S240031066

Instructions:

- You must submit two separate copies (**one Word file and one PDF file**) using the Assignment Template on Blackboard via the allocated folder. These files **must not be in compressed format**.
- It is your responsibility to check and make sure that you have uploaded both the correct files.
- Zero mark will be given if you try to bypass the SafeAssign (e.g., misspell words, remove spaces between words, hide characters, use different character sets, **convert text into image** or languages other than English or any kind of manipulation).
- Email submission will not be accepted.
- You are advised to make your work clear and well-presented. This includes filling your information on the cover page.
- You must use this template, failing which will result in zero mark.
- You **MUST** show all your work, and text must not be converted into an image, unless specified otherwise by the question.
- Late submission will result in ZERO mark.
- The work should be your own, copying from students or other resources will result in ZERO mark.
- Use **Times New Roman** font for all your answers.

Project Instruction

Project Objective:

Design, configure, and test a network setup in **Packet Tracer** to successfully transmit data packets between devices in different LANs across two separate WANs (WAN 1 and WAN 2).

Group Details

- Group Size = Maximum of 3 Members.
- One group member (group leader/coordinator) must **submit the project report** on blackboard. Marks will be given based on your submission and quality of the contents.

Project Report

- The project is divided into two phases:
 - Phase 1 (Mid project Progress Report)
 - Phase 2 (Final project Report)
- This report is for Phase 2. In this report, you should complete all the requirements for Phase 2.
- Each Report will be evaluated according to the marking criteria

Learning Outcome(s):

Demonstrate protocol configuration, network-addressing schemes and analyze packet transmission for the Local and Wide Area Networks.

Project Description (Common to Phase 1 and Phase 2)

A university operates two campuses: a Main Campus and a Branch Campus. Each campus network is treated as a separate WAN site. Your task is to design and configure, in Cisco Packet Tracer, a network that successfully transmits data packets from a device in any LAN of WAN 1 (Main Campus) to a device in any LAN of WAN 2 (Branch Campus). Each WAN contains 2 LANs, and each LAN has 3 end devices.

Network Design Requirements:

- 1. WAN 1 (Main Campus):**
 - Contains LAN 1 (Computer Lab) and LAN 2 (Admin Office).
 - Each LAN has 3 devices (PCs or laptops) connected through a switch.
 - Assign private IP addresses to the devices in each LAN (e.g., use 172.16.10.0/24 for LAN 1 and 172.16.20.0/24 for LAN 2).
 - Connect each LAN to a router (Router 1).
- 2. WAN 2 (Branch Campus):**
 - Contains LAN 3 (Library) and LAN 4 (Faculty Office).
 - Each LAN has 3 devices (PCs or laptops) connected through a switch.
 - Assign private IP addresses to the devices in each LAN (e.g., use 172.16.30.0/24 for LAN 3 and 172.16.40.0/24 for LAN 4).
 - Connect each LAN to a router (Router 2).
- 3. WAN Connection:**
 - Connect Router 1 and Router 2 using a serial link to simulate a WAN connection.
 - Assign IP addresses to the serial interfaces (e.g., 10.10.10.1/30 for Router 1 and 10.10.10.2/30 for Router 2).

Configuration Details:

- 1. Assign IP Addresses:**
 - Configure IP addresses, subnet masks, and default gateways for all devices in each LAN. Example:
 - LAN 1: 172.16.10.0/24, Default Gateway: 172.16.10.1 (Router 1's interface).
 - LAN 2: 172.16.20.0/24, Default Gateway: 172.16.20.1 (Router 1's interface).

- LAN 3: 172.16.30.0/24, Default Gateway: 172.16.30.1 (Router 2's interface).
- LAN 4: 172.16.40.0/24, Default Gateway: 172.16.40.1 (Router 2's interface).

2. Router Configuration:

- Configure IP addresses on the LAN and WAN interfaces of both routers. Example:
 - Router 1:
 - LAN 1 Interface: 172.16.10.1/24
 - LAN 2 Interface: 172.16.20.1/24
 - WAN Interface (Serial): 10.10.10.1/30
 - Router 2:
 - LAN 3 Interface: 172.16.30.1/24
 - LAN 4 Interface: 172.16.40.1/24
 - WAN Interface (Serial): 10.10.10.2/30

3. Enable Routing:

- Configure static routes or a dynamic routing protocol (e.g., RIP) on both routers to ensure communication between WAN 1 and WAN 2.

Phase 2 Requirements

(15 Marks)**Testing and Verification**

1. Use the ping command to test connectivity between a device in any LAN of WAN 1 and a device in any LAN of WAN 2.
2. Verify that data packets are successfully transmitted (0% packet loss).

Questions to Answer (10 Marks — 2 marks each)

Answer all five questions. For each question, you must include (a) a clear screenshot from your Packet Tracer project and (b) the commands used at that instance (e.g., IOS CLI commands or the configuration steps applied). Screenshots without the corresponding commands/steps will receive ZERO marks for that question.

1. **Creating nodes:** Show a screenshot of the complete topology with all nodes created (12 end devices, 4 switches, 2 routers). List the device types selected and any steps/commands used to name the devices (e.g., hostname configuration). (2 marks)
2. **Giving connections in the LAN:** Show a screenshot of the LAN connections between end devices, switches, and routers. State the cable types used for each connection and why. (2 marks)
3. **Assigning IP addresses:** Show screenshots of IP address, subnet mask, and default gateway assignment on at least one end device in each LAN, and the commands used to configure the router LAN interfaces (e.g., interface, ip address, no shutdown). (2 marks)
4. **Creating the WAN connection:** Show a screenshot of the serial link between Router 1 and Router 2, and the commands used to configure the serial interfaces and enable routing (static routes or a dynamic routing protocol such as RIP), including clock rate if applicable. (2 marks)
5. **Successful data transmission using the ping command:** Show screenshots of successful ping tests between a device in WAN 1 and a device in WAN 2 (both directions), with the exact ping commands used and the results (replies received, 0% loss). (2 marks)

Written Reflection — End of Project Report (5 Marks)

The project report must include a Reflection section (300–500 words) as the last section before the Project Artifacts section. This section must be written in the students' own words and should address some of the following:

1. Describe one specific challenge or obstacle you encountered during this project and explain in detail how you identified and resolved it.
2. Explain why you chose your specific approach/method (e.g., static routing vs. RIP, your IP addressing scheme) over at least one alternative you considered, and what tradeoffs informed that decision.
3. If you used any AI tools during this project (e.g., ChatGPT, Claude, Copilot), disclose which tool(s), for what specific purpose (e.g., debugging, grammar checking, brainstorming), and how you verified or modified the output.
4. What would you do differently if you were to redo this project with more time or resources?

Version History / Commit Log Requirements (Common to Both Reports)

Students must document and submit their project history/timestamps using a live, editable link:

- **Written report:** Submit a shared Google Doc or Word Online link (sharing set to "Anyone with the link can view") along with your final PDF report. The link must show the progress of the students' work with timestamps/screenshots.
- **Code/data/configuration files:** Submit Packet Tracer files (.pkt) and any configuration scripts via a GitHub or GitLab repository link (the coordinator may choose a repository suitable for the course). The repository must show a commit history reflecting incremental progress. Commit regularly (at minimum once per week), with clear, descriptive commit messages.

A separate section in the report must be added and named "Project Artifacts" to include all links, for example:

- Live report document (with edit history): [link]
- GitHub/GitLab repository (with commit history): [link]
- Packet Tracer project file (.pkt): [link or attached]

What NOT to do: Students must not write their report elsewhere and paste the final version in at the last minute. They also must not make a single commit containing the entire project. Both are treated as red flags regardless of the quality of the final work.

Important Notes

- **AI use:** Students may use AI tools (ChatGPT, Claude, Copilot, Gemini, etc.) only for brainstorming approaches, debugging small errors, or proofreading text. AI must not be used to generate analysis, write configuration logic, or produce substantial portions of the report or project files. Any permitted AI use must be disclosed in the Reflection section. Undisclosed AI use, or AI use beyond this scope (disclosed or not), will result in a zero grade for the entire project.
- Any submission lacking a valid, inspectable version/commit history, or showing evidence of AI generation or plagiarism, will receive a zero grade for the entire project.
- Failure to submit the mid progress report as required, or submission of reports found to be fabricated, copied, or AI-generated, will result in a zero grade for the entire project.
- The final report must be submitted as a PDF, together with the live document link, the repository link, and the Packet Tracer (.pkt) file.
- The edit history of the live document and the commit history of the repository must show incremental progress across both phases (Phase 1 and Phase 2).

Answer

Project Overview

This project designs and verifies a Cisco Packet Tracer network for a Main Campus and a Branch Campus. Each campus contains two LANs with three end devices per LAN. Two routers are connected through a point-to-point serial WAN link, and static routes provide communication between the four IPv4 networks. The completed design is verified through successful bidirectional ping tests with 0% packet loss.

Network Topology

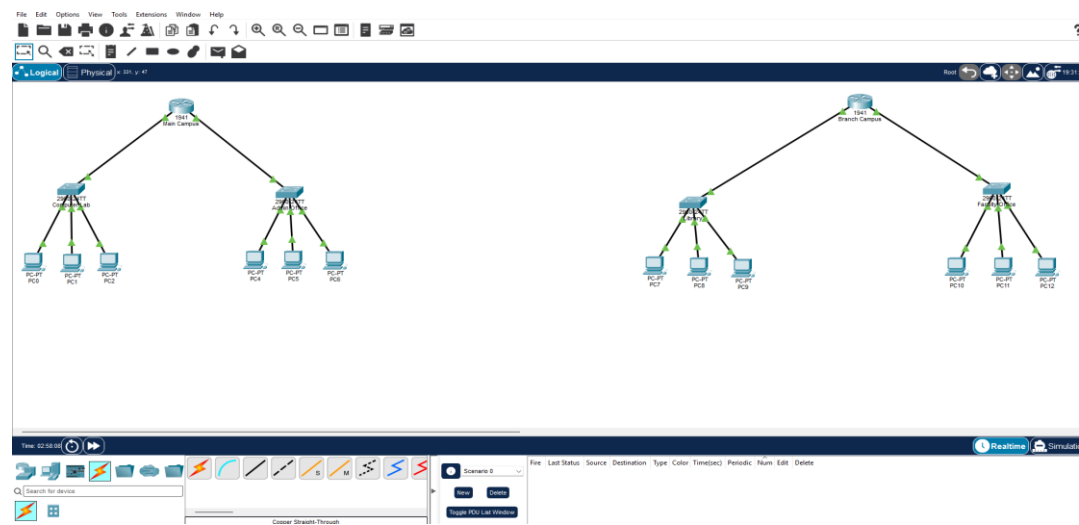


Figure 1. Initial Network Topology

Devices Used in the Network

Device Type	Model	Quantity
Router	Cisco 1941	2
Switch	Cisco 2960-24TT	4
PC	PC-PT	12

Commands Used to Change Device Names

Router (Main Campus):

```
enable
configure terminal
hostname MainCampus
end
copy running-config startup-config
```

Router (Branch Campus):

```
enable
configure terminal
hostname BranchCampus
end
copy running-config startup-config
```

Switch (Computer Lab):

```
enable
configure terminal
hostname ComputerLab
end
copy running-config startup-config
```

Switch (Admin Office):

```
enable
configure terminal
hostname AdminOffice
end
copy running-config startup-config
```

Switch (Library):

```
enable
configure terminal
hostname Library
end
copy running-config startup-config
```

Switch (Faculty Office):

```
enable
configure terminal
hostname FacultyOffice
end
copy running-config startup-config
```

LAN Connections and Cable Types

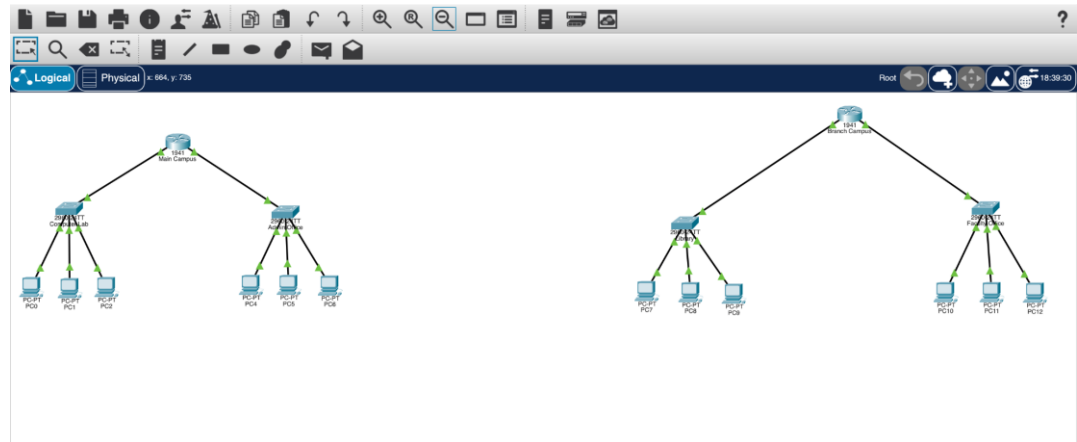


Figure 2. LAN connections between end devices, switches, and routers

Connection	Cable Type	Reason
PC to Switch	Copper Straight-Through	Used to connect different types of devices (PC and Switch).
Switch to Router	Copper Straight-Through	Used to connect different types of devices (Switch and Router).

IP Addressing Plan

Each PC was configured from Desktop > IP Configuration by selecting Static and entering the assigned IPv4 address, subnet mask, and default gateway.

LAN	Network	Subnet Mask	Default Gateway
ComputerLab	172.16.10.0/24	255.255.255.0	172.16.10.1
AdminOffice	172.16.20.0/24	255.255.255.0	172.16.20.1
Library	172.16.30.0/24	255.255.255.0	172.16.30.1
FacultyOffice	172.16.40.0/24	255.255.255.0	172.16.40.1

The image displays two screenshots of a network configuration interface, likely from a packet tracer or similar simulation software. Both screenshots show the configuration for a specific interface, FastEthernet0/0, on a device labeled PC4 (top) and PC0 (bottom).

PC4 Configuration:

- Interface:** FastEthernet0/0
- IP Configuration:**
 - ☐ DHCP
 - ☒ Static
 - IPv4 Address: 172.16.20.2
 - Subnet Mask: 255.255.255.0
 - Default Gateway: 172.16.20.1
 - DNS Server: 0.0.0.0
- IPv6 Configuration:**
 - ☐ Automatic
 - ☒ Static
 - IPv6 Address: (empty)
 - Link Local Address: FE80::207:ECFF:FE4E:6622
 - Default Gateway: (empty)
 - DNS Server: (empty)
- 802.1X:**
 - ☐ Use 802.1X Security
 - Authentication: MD5
 - Username: (empty)
 - Password: (empty)

PC0 Configuration:

- Interface:** FastEthernet0/0
- IP Configuration:**
 - ☐ DHCP
 - ☒ Static
 - IPv4 Address: 172.16.10.3
 - Subnet Mask: 255.255.255.0
 - Default Gateway: 172.16.10.1
 - DNS Server: 0.0.0.0
- IPv6 Configuration:**
 - ☐ Automatic
 - ☒ Static
 - IPv6 Address: (empty)
 - Link Local Address: FE80::2014:3FFF:FE14:4030
 - Default Gateway: (empty)
 - DNS Server: (empty)
- 802.1X:**
 - ☐ Use 802.1X Security
 - Authentication: MD5
 - Username: (empty)
 - Password: (empty)



Figure 3. Static IPv4 configuration examples from the four LANs

Configuration evidence: ComputerLab PC0 - 172.16.10.3, gateway 172.16.10.1; AdminOffice PC4 - 172.16.20.2, gateway 172.16.20.1; Library PC7 - 172.16.30.2, gateway 172.16.30.1; FacultyOffice PC10 - 172.16.40.2, gateway 172.16.40.1. All four devices use subnet mask 255.255.255.0.

[Top](#)



The routers are connected using a Serial DCE/DTE link. The MainCampus router is the DCE side and provides clocking with clock rate 64000; both serial interfaces are enabled with no shutdown.

```

Physical Config Attributes
-----
OS Command Line Interface

#showrun | show
Cisco IOS Software (version 1.0) with 491820K/31748K bytes of memory.
Processor board ID FTU11340000
1 Gigabit Ethernet interface
1 Low-speed serial Async/RS485 network interface(s)
DAPM configuration is 64 bits wide with parity disabled.
388K bytes of non-volatile configuration memory.
2493982 bytes of ATA System CompactFlash 0 (Read/Write)

Power RETURN to get started!

MainCampus# enable
MainCampus# configure terminal
Enter configuration commands, one per line. End with CTRL-Z
MainCampus(config)# interface serial0/1/0
MainCampus(config-if)# ip address 10.10.10.1 255.255.255.252
MainCampus(config-if)# clock rate 64000
MainCampus(config-if)# no shutdown
MainCampus(config-if)# exit
MainCampus#
MainCampus# configure serial0/1/0, changed state to up
#LINEPROTO-0-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up

MainCampus cmd0 is now available

Power RETURN to get started.


MainCampus# enable
MainCampus# configure terminal
Enter configuration commands, one per line. End with CTRL-Z
MainCampus(config)# ip route 172.16.0.0 255.255.255.0 10.10.10.2
MainCampus(config)# ip route 172.16.40.0 255.255.255.0 10.10.10.2
MainCampus# configure #?
MainCampus#
#SYS-0-CONFIG_1: Configured from console by console
#

```

Serial interface configuration

Static routes

```
ip route 172.16.30.0 255.255.255.0 10.10.10.2
ip route 172.16.40.0 255.255.255.0 10.10.10.2
end
copy running-config startup-config
```

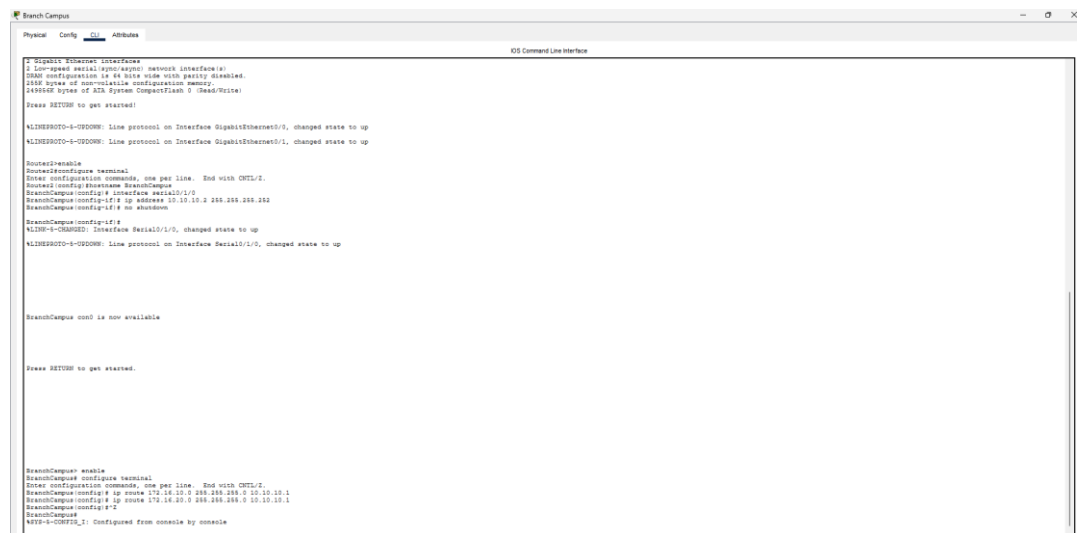

```
Branch Campus
Physical  Config  Attributes
IOS Command Line Interface

? Global Ethernet interfaces
? Low-speed serial (sync/async) network interface(s)
? VME configuration is in use with parity disabled.
? 16M bytes of non-volatile configuration memory.
? 245952 bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router#config branchname BranchCampus
BranchCampus(config)# interface serial10/1/0
BranchCampus(config-if)# ip address 10.10.10.2 255.255.255.252
BranchCampus(config-if)# no shutdown
BranchCampus(config-if)#

BranchCampus(config-if)#
%LINEPROTO-5-UPDOWN: Interface Serial10/1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial10/1/0, changed state to up

BranchCampus now is now available

Press RETURN to get started.

BranchCampus enable
BranchCampus configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
BranchCampus(config)# ip route 172.16.10.0 255.255.255.0 10.10.10.1
BranchCampus(config)# ip route 172.16.20.0 255.255.255.0 10.10.10.1
BranchCampus(config)#
BranchCampus
MTB-6-CMT01_1: Configured from console by console
```

Router 2 (Branch Campus)

Serial interface configuration

```
enable
configure terminal
interface serial10/1/0
ip address 10.10.10.2 255.255.255.252
no shutdown
exit
```

Static routes

```
ip route 172.16.10.0 255.255.255.0 10.10.10.1
ip route 172.16.20.0 255.255.255.0 10.10.10.1
end
copy running-config startup-config
```

Successful Data Transmission Using Ping



Figure 5. Successful ping from Main Campus to Branch Campus

Command: ping 172.16.30.2

Result: 4 packets sent, 4 received, 0% packet loss.



Figure 6. Successful ping from Branch Campus to Main Campus

Command: ping 172.16.10.3

Result: 4 packets sent, 4 received, 0% packet loss.

Version History / Commit Log

The following internal record summarizes the main stages represented in the submitted report and Packet Tracer file.

Version	Phase	Work Completed	Status
1.0	Phase 1	Created the initial topology, selected devices, and named routers and switches.	Completed
1.1	Phase 1	Connected LAN devices and prepared the IPv4 addressing plan for all four LANs.	Completed
2.0	Phase 2	Configured LAN interfaces, serial addressing, clocking, and static routes.	Completed
2.1	Phase 2	Verified bidirectional communication with successful ping tests and 0% packet loss.	Completed
2.2	Final	Reviewed commands, added reflection and artifacts, and prepared Word and PDF files.	Completed

Reflection

Completing this project changed the way we approached network troubleshooting because every part of the design had to work as one system. The most significant challenge was establishing reliable communication between the Main Campus and the Branch Campus after the four LANs had been configured. Local communication was straightforward, but the first cross-WAN tests required careful checking of router interfaces, the serial link, default gateways, and routing entries. We reviewed the addressing table, used the router interface status and configuration outputs, and checked the path step by step. The serial connection was enabled on both routers, a clock rate of 64000 was applied on the DCE side, and each required static route was verified. We then repeated the ping tests in both directions. Receiving four replies with 0% packet loss confirmed that the LAN and WAN configurations were working together correctly.

We selected static routing rather than RIP because the topology is small and contains only two routers and four known LANs. Static routes made the forwarding path clear and allowed every destination network and next-hop address to be checked directly. RIP would reduce manual updates if the network grew, but it would introduce unnecessary routing advertisements and additional configuration for this limited design. We also used /24 networks for the LANs because they were easy to organize and distinguish, while the /30 subnet on the serial link provided only the two usable addresses required for the point-to-point connection. The main tradeoff is that static routing is less scalable and would require manual changes if more campuses or networks were added.

AI assistance was used only to proofread the final wording, review document formatting, and identify small presentation issues in the listed commands. It was not used to operate Packet Tracer or replace the group's configuration work. Every technical correction was checked against the actual topology, router outputs, IP settings, and successful ping results before it was included.

If we repeated the project, we would test and document each stage immediately after completing it. We would save clearer screenshots of interface status, routing tables, and ping results, use a structured troubleshooting checklist, and keep more frequent local versions of the report and Packet Tracer file. This would make errors easier to isolate and produce a stronger final submission.

Project Artifacts

Cisco Packet Tracer project file (.pkt): IT351_FinalDesign.pkt (attached separately).

Final written report: IT351_Project-Phase_2_Final.docx.

Final PDF report: IT351_Project-Phase_2_Final.pdf.

Final Submission

Submission Item	Status
Final Word report (.docx)	Prepared
Final PDF report (.pdf)	Prepared
Cisco Packet Tracer project (.pkt)	Attached separately