

HEAD (AMAME)

V2.1 Slicing Guide

v1.0 Sept 4/2025



(H) Filament Notes

Some head(amame) parts need to be stronger than others.

Headband Spring

Spring Clamp

Use **PETG, ABS, or ASA** because they are stronger than PLA and will keep these flexible parts from “relaxing” over time.

The rest of the parts can be printed in nearly any filament!



(H) Choose your adventure





Just want to get printing?

1. Open the Pre-Configured Files for your slicer
2. Select “Open as project” if prompted
3. Change to your printer, click “transfer” if prompted
4. Slice and Print
5. Follow the Assembly Guide to build your head(amame)

If you don't see your slicer, we recommend you take this opportunity to [get OrcaSlicer](#) for your printer. It's worth it.

Want to see under the hood?

If you want to see why I chose the settings and how to get them to work with some other Slicers, keep on reading. 🖱️

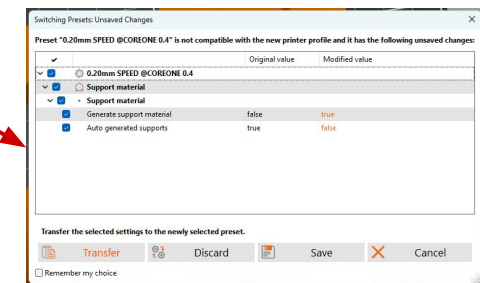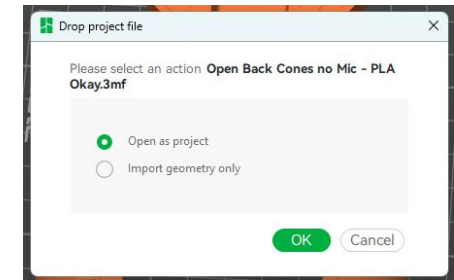
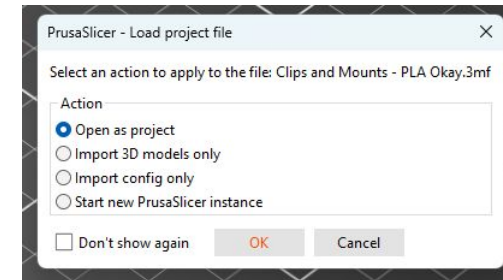
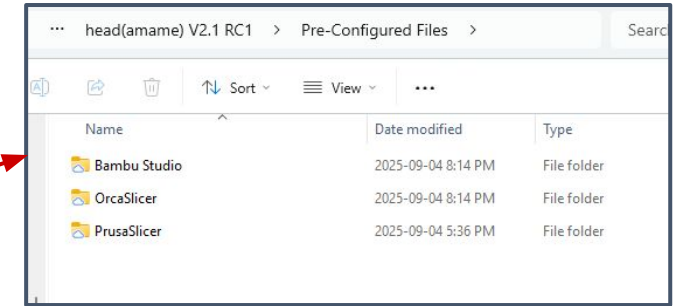


(H) Why Gyroid Matters

head(ame) uses an 11% gyroid infill in the Cones and Headband Mounts to improve sound quality and look cool as hell. They cut down on reflections on the back side of the driver that may distort your sound.

These areas are represented by “infill bodies” to trick your slicer into generating the infill properly.

Slicers try to “anchor” the infill to the other bodies, causing the infill to have extra lines we don’t want. Each software has a different way to anchor, and we will show you how to avoid them.

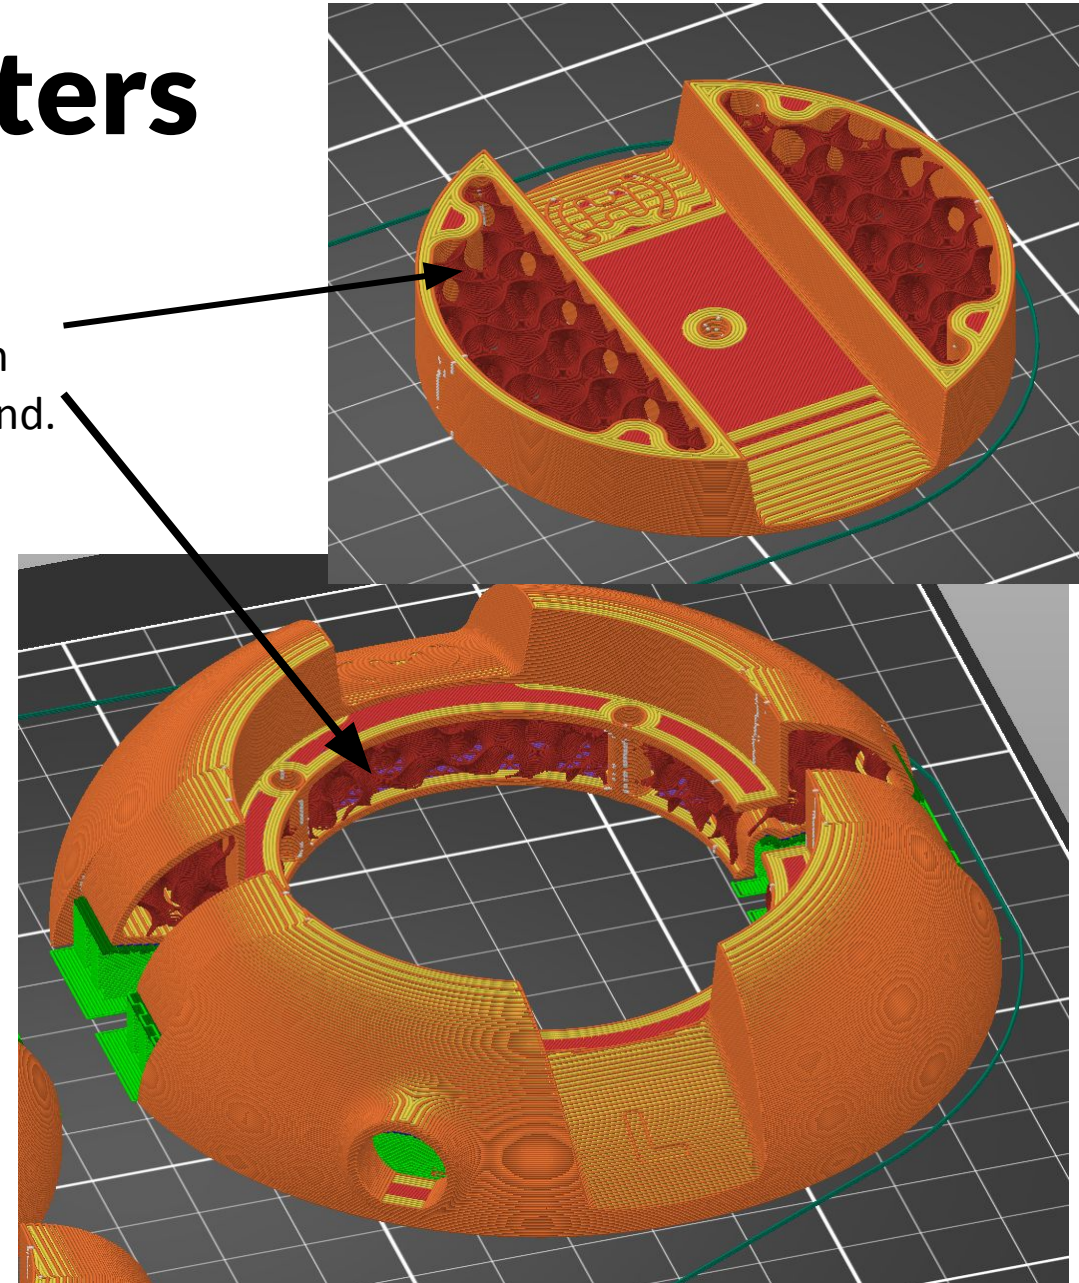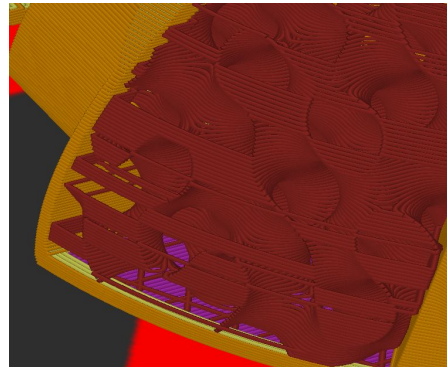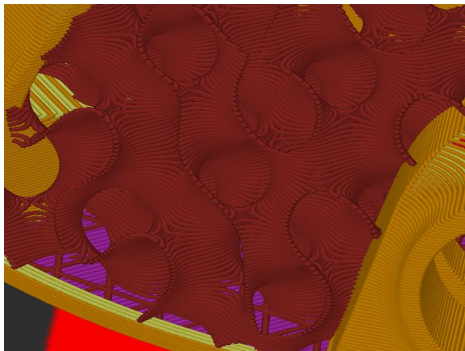


(H) General Slicing Notes


Area	Setting	Comments
Layer Height	0.2mm	General good layer height for all parts
Nozzle Size	0.4mm	No benefit from going smaller/larger
Build Plate Adhesion	User Choice	Brim and Raft are good if you are having adhesion issues
Wall thickness	2.0mm or more	On most walls, this will cause no infill.
Top/Bottom Thickness	2.0mm	This makes sure you have solid shells around infill bodies
Infill	11% on infill bodies, 100% all else	Gyroid cones/headband mounts, Rectilinear all else
Maximum length of infill anchor (PrusaSlicer and OrcaSlicer)	0 (not anchored)	Removes infill anchors – giving open-celled gyroid
Connect infill lines (Cura only)	Unchecked	Removes infill anchors – giving open-celled gyroid
Sparse Infill – (SuperSlicer)	Connected to hole perimeters	Removes infill anchors – giving open-celled gyroid

(H) PrusaSlicer Settings


1. Infill body settings

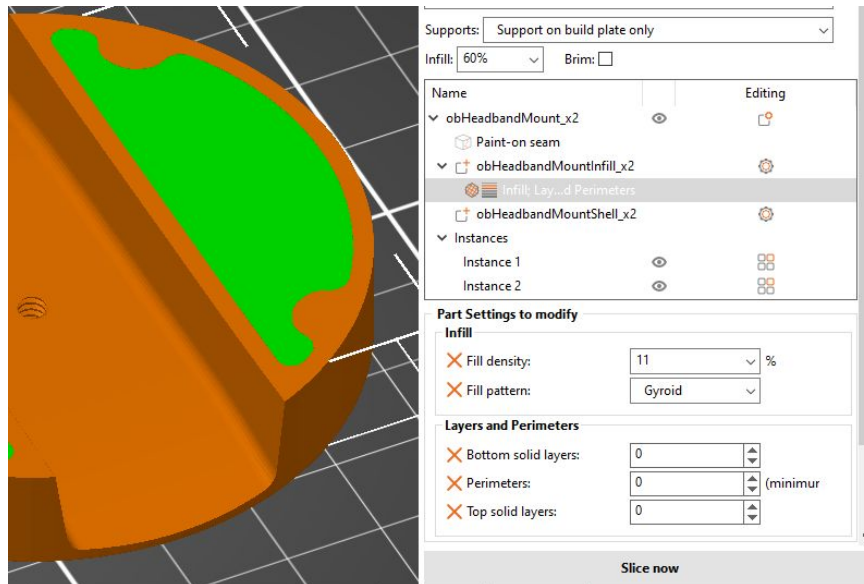

2. Important infill settings for your profile

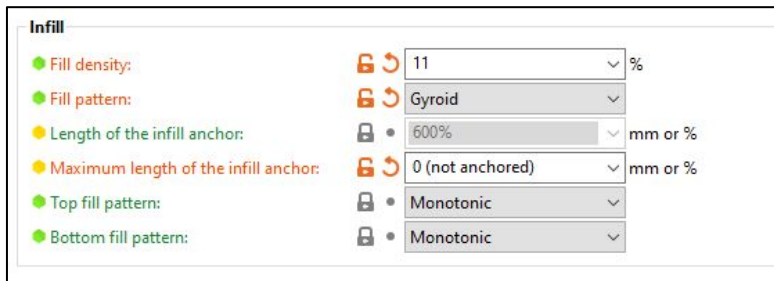


3. Prusa's Paint-on supports and seams keep your outer surfaces looking pretty!

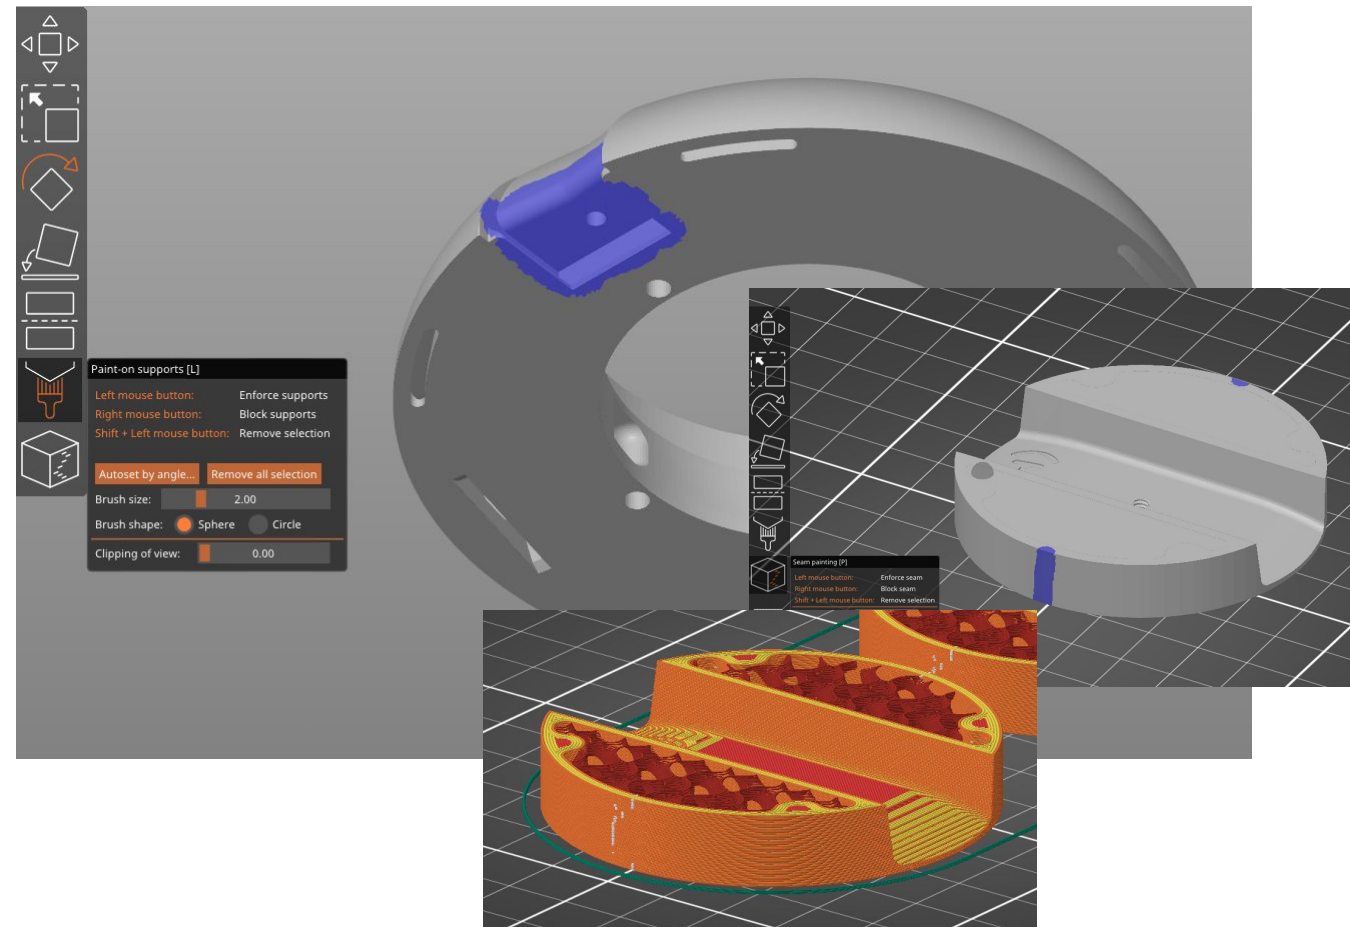

(H) Bambu Studio / OrcaSlicer Settings

In Bambu and Orca you can see all the required settings per part, speeding up preparation!
Important settings are shown on the right side of this image:

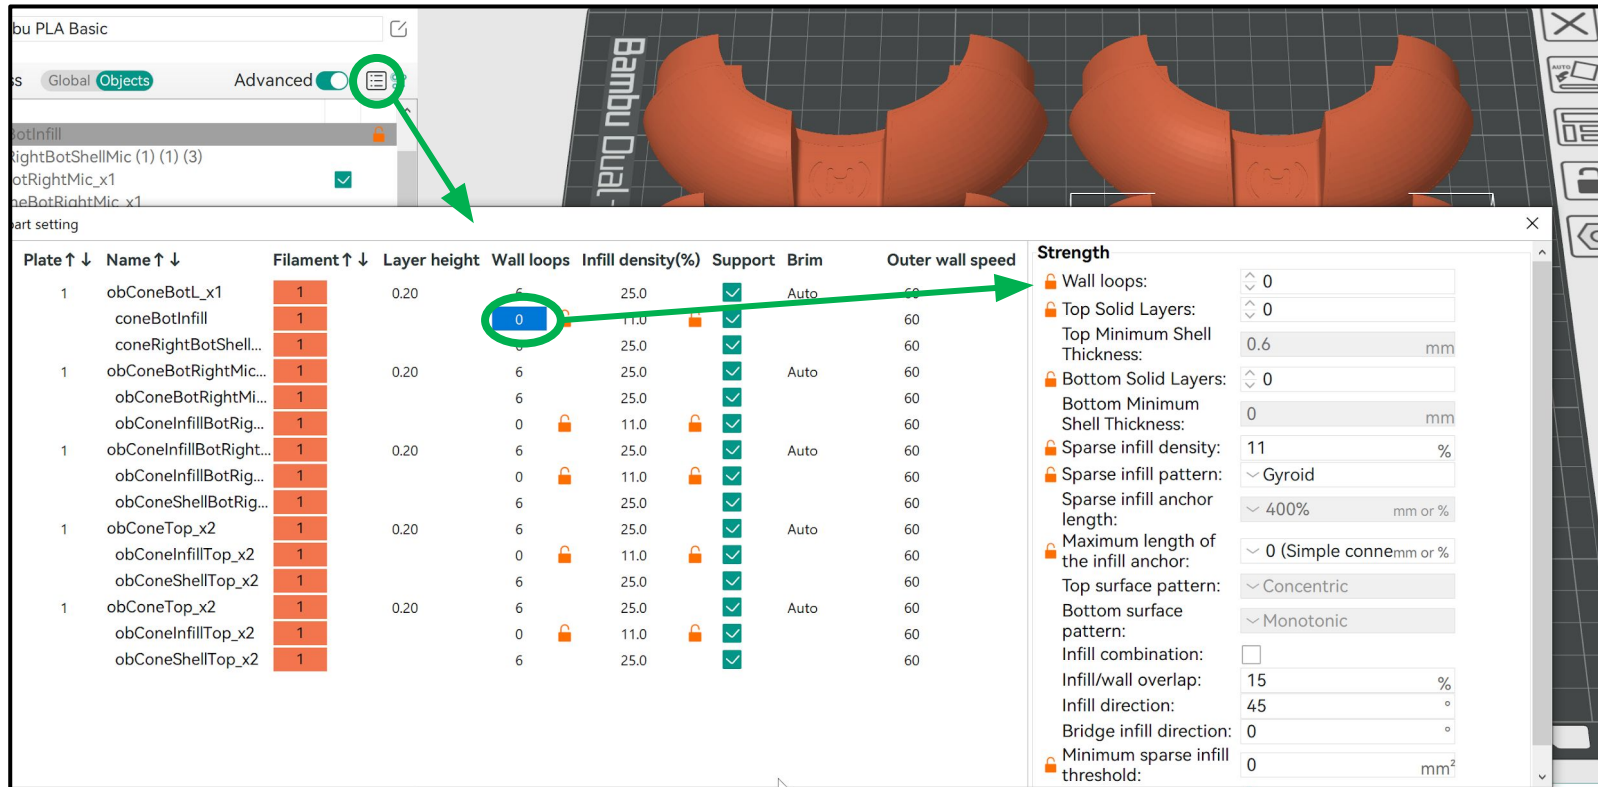

The screenshot shows the Bambu Studio interface with a list of parts and their settings. A green circle highlights the 'Wall loops' column, and a green arrow points from it to the 'Strength' settings panel on the right.

Plate	Name	Filament	Layer height	Wall loops	Infill density(%)	Support	Brim	Outer wall speed
1	obConeBotL_x1	1	0.20	6	25.0	✓	Auto	60
	coneBotInfill	1		0	11.0	✓		60
	coneRightBotShell...	1		6	25.0	✓		60
1	obConeBotRightMic...	1	0.20	6	25.0	✓	Auto	60
	obConeBotRightMi...	1		6	25.0	✓		60
	obConeInfillBotRig...	1		0	11.0	✓		60
1	obConeInfillBotRight...	1	0.20	6	25.0	✓	Auto	60
	obConeInfillBotRig...	1		0	11.0	✓		60
	obConeShellBotRig...	1		6	25.0	✓		60
1	obConeTop_x2	1	0.20	6	25.0	✓	Auto	60
	obConeInfillTop_x2	1		0	11.0	✓		60
	obConeShellTop_x2	1		6	25.0	✓		60
1	obConeTop_x2	1	0.20	6	25.0	✓	Auto	60
	obConeInfillTop_x2	1		0	11.0	✓		60
	obConeShellTop_x2	1		6	25.0	✓		60


Strength

- Wall loops: 0
- Top Solid Layers: 0
- Top Minimum Shell Thickness: 0.6 mm
- Bottom Solid Layers: 0
- Bottom Minimum Shell Thickness: 0 mm
- Sparse infill density: 11 %
- Sparse infill pattern: Gyroid
- Sparse infill anchor length: 400% mm or %
- Maximum length of the infill anchor: 0 (Simple connection) mm or %
- Top surface pattern: Concentric
- Bottom surface pattern: Monotonic
- Infill combination: ☐
- Infill/wall overlap: 15 %
- Infill direction: 45 °
- Bridge infill direction: 0 °
- Minimum sparse infill threshold: 0 mm²


(H) Cura Settings


*Cura Plates are no longer included in the package, so these are included for those who slice themselves. Go give Orca Slicer a try!

1. Before opening Cura Files, make sure these two boxes are un-checked, so the models don't move around on import

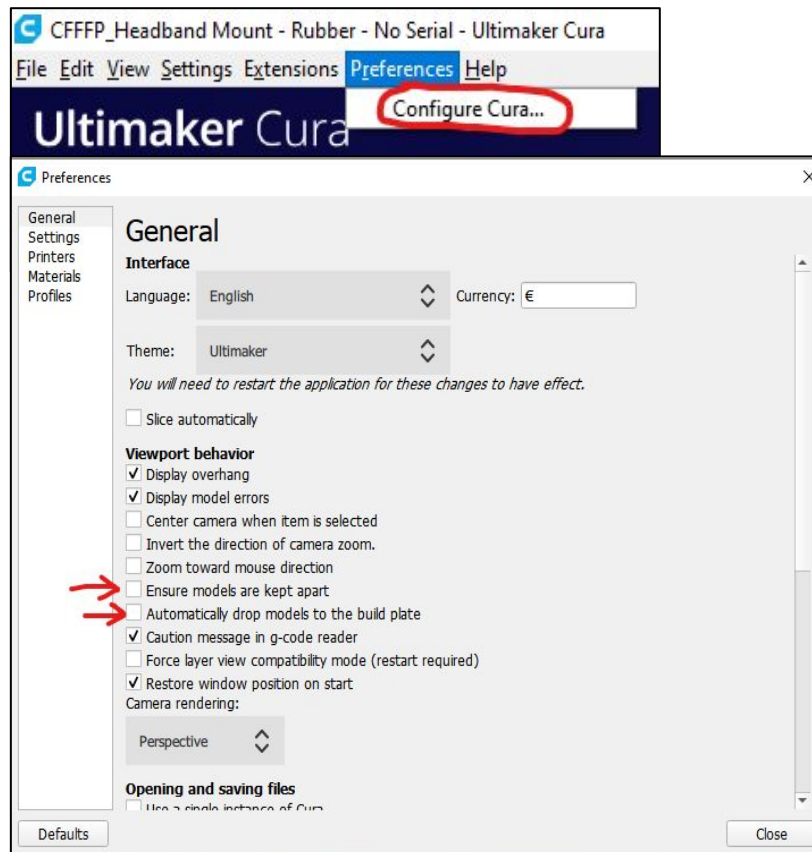

2. Required infill body settings

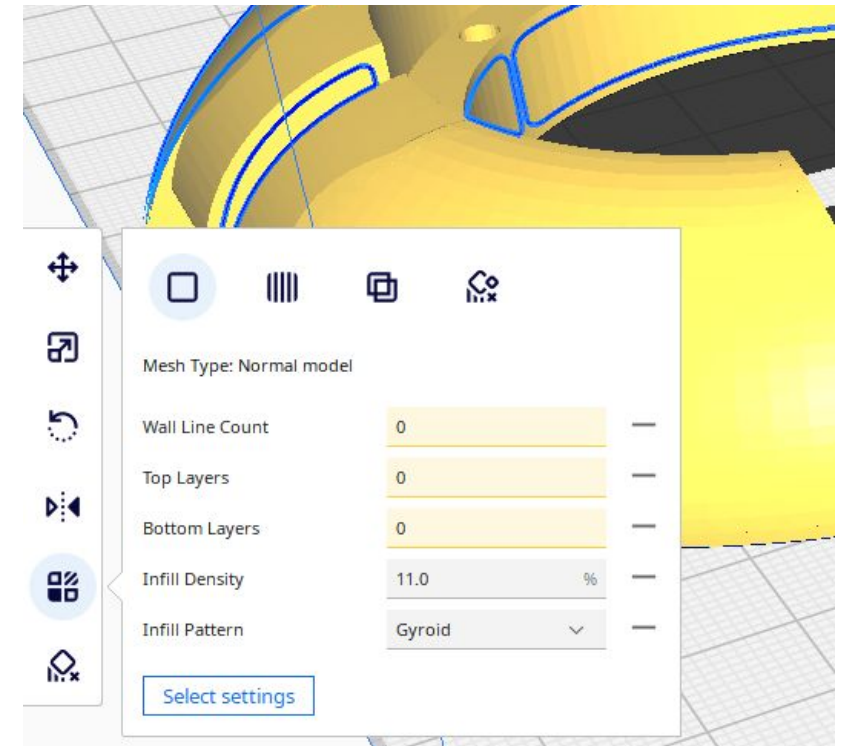




Cura Settings continued

*Cura Plates are no longer included in the package, so these are included for those who slice themselves. Go give Orca Slicer a try!

3. To keep your seams hidden, point the open end of your cones to the back, and set Z seam alignment to the back.

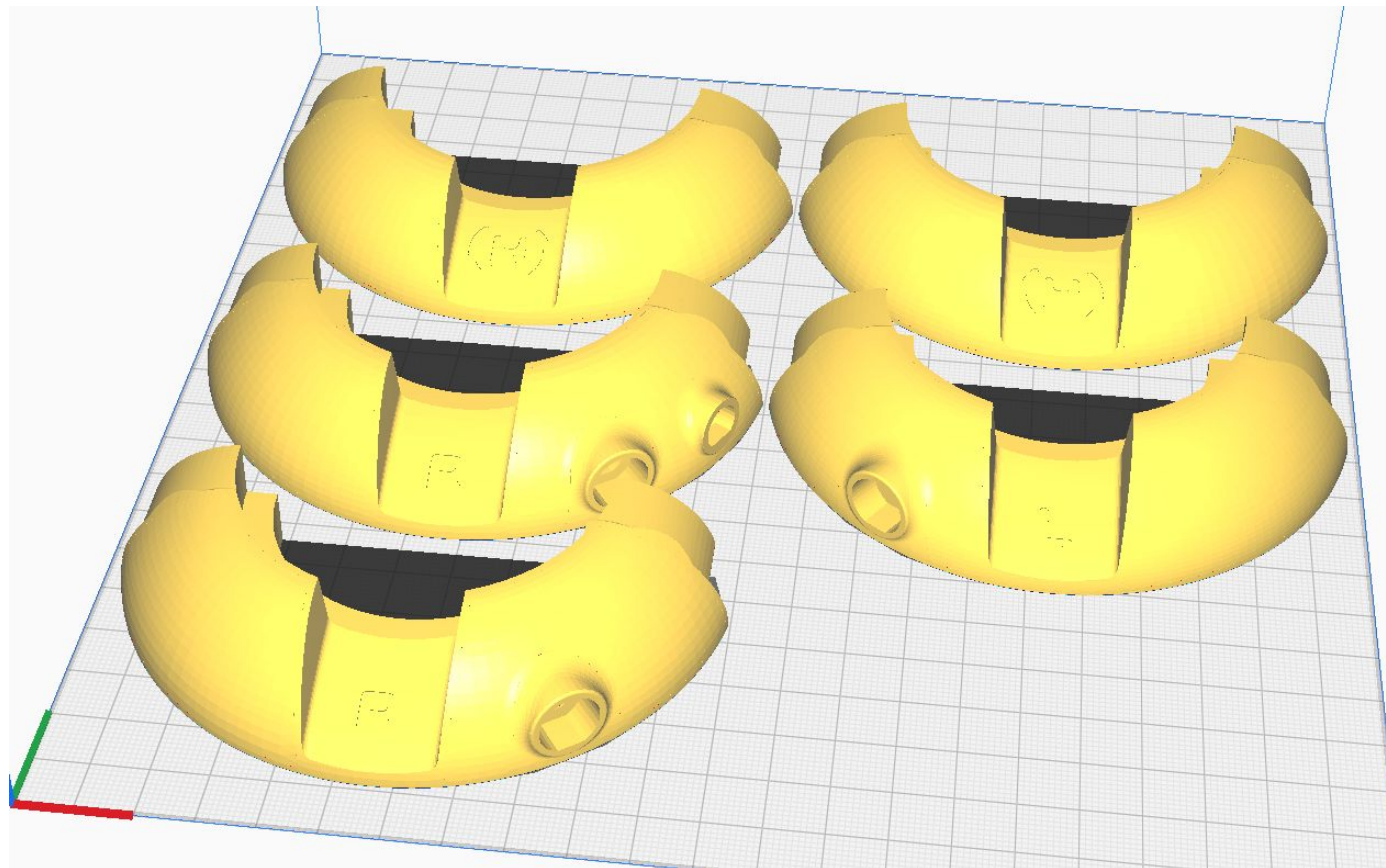

Outer Wall Inset	0.0	mm
Optimize Wall Printing Order	☒	
Wall Ordering	Inside To Outside	▼
Alternate Extra Wall	☐	
Minimum Wall Line Width	0.34	mm
Minimum Even Wall Line Width	0.34	mm
Minimum Odd Wall Line Width	0.34	mm
Print Thin Walls	☒	
Minimum Feature Size	0.1	mm
Minimum Thin Wall Line Width	0.34	mm
Horizontal Expansion	0.0	mm
Initial Layer Horizontal Expansion	0.0	mm
Hole Horizontal Expansion	0.0	mm
Z Seam Alignment	User Specified	▼
Z Seam Position	Back	▼
Z Seam X	110.0	mm
Z Seam Y	220.0	mm
Seam Corner Preference	Smart Hiding	▼
Z Seam Relative	☐	
Top/Bottom		▼
Top Surface Skin Layers	0	

[← Recommended](#)

(H) Thanks for Printing :)

Now go watch the Assembly Instructions! 

If you are reading this...

I want you to know that I appreciate the effort you've put in to printing your own headphones. You will likely feel empowered now that you have produced a great product in your very own home or office. It's head(amame)'s goal to keep providing you things to print that can be infinitely repaired.

If you enjoyed this experience, please consider supporting head(amame) on [Patreon](#), submit for a [Serial Number](#), or just share your favorite songs with a friend on your new headphones.

If you feel like getting your hands dirty, the files are open for modification so that you can use them as your canvas to create and share.

I hope that you enjoy your head(amame) for years to come,

Morgan Andreychuk
President and Founder
head(amame)